Leading Through Innovation

HSS, HSS-E & HSSCo8

STRAIGHT SHANK DRILLS

BOHRER MIT ZYLINDERSCHAFT

- For General Purpose (Soft &Tough Materials)
- Für allgemeine Anwendungen (weiche & zähe Materialien)

SELECTION GUIDE

YG HOLEMAKING TOOLS

SERIES	D2107	D1107	D2105
STANDARD	DIN1897	DIN1897	DIN338
LENGTH	STUB	STUB	JOBBER
SIZE MIN	D1.0	D1.0	D1.0
SIZE MAX	D31.0	D13.0	D20.0
PAGE	234	238	241
SURFACE TREATMENT	Gold Coloring	Steam Tempered	Gold Coloring

HSS, HSS-E & HSSCo8
STRAIGHT SHANK DRILLS

For General Purpose (Soft &Tough Materials)

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.276

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc	D2107	D1107	D2105
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎	◎
	2		About 0.45% C	Annealed	190	13	◎	◎	◎
	3		About 0.45% C	Quenched & Tempered	250	25	◎	◎	◎
	4		About 0.75% C	Annealed	270	28	○	○	○
	5		About 0.75% C	Quenched & Tempered	300	32			
	6	Low alloy steel		Annealed	180	10	◎	◎	◎
	7			Quenched & Tempered	275	29	○	○	○
	8			Quenched & Tempered	300	32	○	○	○
	9			Quenched & Tempered	350	38			
	10	High alloyed steel, and tool steel		Annealed	200	15	○	○	○
	11			Quenched & Tempered	325	35			
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	◎	○	◎
	13		Martensitic	Quenched & Tempered	240	23	○	○	○
	14		Austenitic		180	10	○	○	○
K	15	Grey cast iron	Pearlitic / ferritic		180	10	○	○	○
	16		Pearlitic (Martensitic)		260	26	○	○	○
	17	Nodular cast iron	Ferritic		160	3	○	○	○
	18		Pearlitic		250	25			
	19	Malleable cast iron	Ferritic		130		○	○	○
	20		Pearlitic		230	21			
N	21	Aluminum-wrought alloy	Not Curable		60		○	○	○
	22		Curable	Hardened	100		○	○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		○	○	○
	24		≤ 12% Si, Curable	Hardened	90				
	25		> 12% Si, Not Curable		130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110				
	27		CuZn, CuSnZn (Brass)		90				
	28		CuSn, lead-free copper and electrolytic copper		100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic				○	○	○
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15			
	32			Cured	280	30			
	33		Ni or Co Based	Annealed	250	25			
	34			Cured	350	38			
	35			Cast	320	34			
	36	Titanium Alloys	Pure Titanium		400 Rm		○	○	○
	37		Alpha + Beta Alloys	Hardened	1050 Rm				
H	38	Hardened steel		Hardened	550	55			
	39			Hardened	630	60			
	40	Chilled Cast Iron		Cast	400	42			
	41	Hardened Cast Iron		Hardened	550	55			

DL105	D1105	D1125	D2104	D1121	DL109	D1100	D1106
DIN338	DIN338	DIN338	DIN340	DIN1869/1	DIN338	DIN338	DIN338
JOBBER	JOBBER	JOBBER	LONG	EXTRA LONG	JOBBER	JOBBER	JOBBER
D1.0	D0.3	D2.0	D2.0	D2.0	D1.5	D1.5	D1.5
D20.0	D20.0	D20.0	D12.0	D13.0	D13.0	D13.0	D13.0
244	247	252	255	257	258	259	261
Gold Coloring	Steam Tempered	Bright	Gold Coloring	Steam Tempered	Bright		

DL105	D1105	D1125	D2104	D1121	DL109	D1100	D1106
◎	◎	◎	◎	◎	◎		
◎	◎	◎	◎	◎	◎		
◎	◎	◎	◎	◎	◎		
○	○	○	○	○	○		
◎	◎	◎	◎	◎	◎		
○	○	○	○	○	○		
○	○	○	○	○	○		
○	○	○	○	○	○		
◎	○	○	◎	○	◎		
○	○	○	○	○	○		
○	○	○	○	○	○		
○	○	○	○	○	○		
○	○	○	○	○	○		
○	○	○	○	○	○		
○	○	○	○	○	○		
○	○	○	○	○	○		◎
○	○	○	○	○	○		◎
○	○	○	○	○	○		◎
							◎
						◎	
						◎	
○	○	○	○	○	○		
○	○	○	○	○	○		

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

SELECTION GUIDE

YG HOLEMAKING TOOLS

HSS-E STRAIGHT SHANK DRILLS

For General Purpose (Soft &Tough Materials)

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : P.276

SERIES	DH100 DL510	DH100 DL508	DH100 DL509	DH100 DL505	DH100 DL504	DH100 DT600	DH100 DT692	DH100 DT693	DH100 DL608	DH50 DL507
STANDARD	DIN1897	DIN338	DIN340	DIN338	DIN340	DIN1869/1	DIN1869/2	DIN1869/3	DIN341	-
LENGTH	STUB	JOBBER	LONG	JOBBER	LONG		EXTRA LONG		LONG	EXTRA LONG
SIZE MIN	D2.0	D2.0	D2.0	D2.0	D2.0	D2.0	D3.0	D4.0	D13.0	D2.0
SIZE MAX	D20.0	D16.0	D12.0	D13.0	D13.0	D10.5	D10.2	D10.0	D30.0	D13.0
PAGE	263	265	267	269	271		272		273	274
SURFACE TREATMENT		Bright		Steam Tempered			TiAlN		Bright	

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc	DL510	DL508	DL509	DL505	DL504	DT600	DT692	DT693	DL608	DL507
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎	◎	◎	◎	◎	◎	◎	◎	○
	2		About 0.45% C	Annealed	190	13	◎	◎	◎	◎	◎	◎	◎	◎	◎	
	3		About 0.45% C	Quenched & Tempered	250	25	◎	◎	◎	◎	◎	◎	◎	◎	◎	
	4		About 0.75% C	Annealed	270	28	○	○	○	○	○	○	○	○	○	
	5		About 0.75% C	Quenched & Tempered	300	32										
	6	Low alloy steel		Annealed	180	10	◎	◎	◎	◎	◎	◎	◎	◎	◎	
	7			Quenched & Tempered	275	29	○	○	○	○	○	○	○	○	○	
	8			Quenched & Tempered	300	32	○	○	○	○	○	○	○	○	○	
	9			Quenched & Tempered	350	38										
	10	High alloyed steel, and tool steel		Annealed	200	15	○	○	○	○	○	○	○	○	○	
	11			Quenched & Tempered	325	35										
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15										
	13		Martensitic	Quenched & Tempered	240	23										
	14		Austenitic		180	10										
K	15	Grey cast iron	Pearlitic / ferritic		180	10	○	○	○	○	○	○	○	○	○	
	16		Pearlitic (Martensitic)		260	26	○	○	○	○	○	○	○	○	○	
	17	Nodular cast iron	Ferritic		160	3	○	○	○	○	○	○	○	○	○	
	18		Pearlitic		250	25	○	○	○	○	○	○	○	○	○	
	19	Malleable cast iron	Ferritic		130		○	○	○	○	○	○	○	○	○	
	20		Pearlitic		230	21	○	○	○	○	○	○	○	○	○	
N	21	Aluminum-wrought alloy	Not Curable		60											◎
	22		Curable	Hardened	100											◎
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75											○
	24		≤ 12% Si, Curable	Hardened	90											
	25		> 12% Si, Not Curable		130											
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110											
	27		CuZn, CuSnZn (Brass)		90											
	28		CuSn, lead-free copper and electrolytic copper		100											
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic													
	30		Rubber, Wood, etc.													
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15										
	32			Cured	280	30										
	33		Ni or Co Based	Annealed	250	25										
	34			Cured	350	38										
	35			Cast	320	34										
	36	Titanium Alloys	Pure Titanium		400 Rm											
	37		Alpha + Beta Alloys	Hardened	1050 Rm											
H	38	Hardened steel		Hardened	550	55										
	39			Hardened	630	60										
	40	Chilled Cast Iron		Cast	400	42										
	41	Hardened Cast Iron		Hardened	550	55										

STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS

STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

▶Surface treatment : Coloring(Gold color)
▶Application : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes

▶Oberflächenbehandlung : Coloring(Goldfarbe)
▶Verwendung : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken. Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.





DIN 1897 | HSS Co8 | 33° | h8 | 135°

P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2107010	1.0	6	26
D2107011	1.1	7	28
D2107012	1.2	8	30
D2107912	1.25	8	30
D2107013	1.3	8	30
D2107014	1.4	9	32
D2107015	1.5	9	32
D2107016	1.6	10	34
D2107017	1.7	10	34
D2107917	1.75	11	36
D2107018	1.8	11	36
D2107019	1.9	11	36
D2107020	2.0	12	38
D2107021	2.1	12	38
D2107022	2.2	13	40
D2107922	2.25	13	40
D2107023	2.3	13	40
D2107024	2.4	14	43
D2107025	2.5	14	43
D2107026	2.6	14	43
D2107027	2.7	16	46
D2107927	2.75	16	46
D2107028	2.8	16	46
D2107029	2.9	16	46
D2107030	3.0	16	46
D2107031	3.1	18	49

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2107032	3.2	18	49
D2107932	3.25	18	49
D2107033	3.3	18	49
D2107034	3.4	20	52
D2107035	3.5	20	52
D2107036	3.6	20	52
D2107037	3.7	20	52
D2107937	3.75	20	52
D2107038	3.8	22	55
D2107039	3.9	22	55
D2107040	4.0	22	55
D2107041	4.1	22	55
D2107042	4.2	22	55
D2107942	4.25	22	55
D2107043	4.3	24	58
D2107044	4.4	24	58
D2107045	4.5	24	58
D2107046	4.6	24	58
D2107946	4.65	24	58
D2107047	4.7	24	58
D2107947	4.75	24	58
D2107048	4.8	26	62
D2107049	4.9	26	62
D2107050	5.0	26	62
D2107051	5.1	26	62
D2107052	5.2	26	62

▶ HSS-E(DL107) is available on your request.
▶ TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P															M					K									
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel						Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20										
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230										
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○											

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS
D2107 SERIES
HSSCo8, STRAIGHT SHANK TWIST DRILLS
STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA
HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8
▶Surface treatment : Coloring(Gold color)
▶Application : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes
▶Oberflächenbehandlung : Coloring(Goldfarbe)
▶Verwendung : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken. Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.





DIN 1897 | HSS Co8 | 33° | h8 | 135°
P.276-277
Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2107952	5.25	26	62
D2107053	5.3	26	62
D2107054	5.4	28	66
D2107055	5.5	28	66
D2107955	5.55	28	66
D2107056	5.6	28	66
D2107057	5.7	28	66
D2107957	5.75	28	66
D2107058	5.8	28	66
D2107059	5.9	28	66
D2107060	6.0	28	66
D2107061	6.1	31	70
D2107062	6.2	31	70
D2107962	6.25	31	70
D2107063	6.3	31	70
D2107064	6.4	31	70
D2107065	6.5	31	70
D2107066	6.6	31	70
D2107067	6.7	31	70
D2107967	6.75	34	74
D2107068	6.8	34	74
D2107069	6.9	34	74
D2107070	7.0	34	74
D2107071	7.1	34	74
D2107072	7.2	34	74
D2107972	7.25	34	74

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2107073	7.3	34	74
D2107074	7.4	34	74
D2107974	7.45	34	74
D2107075	7.5	34	74
D2107076	7.6	37	79
D2107077	7.7	37	79
D2107977	7.75	37	79
D2107078	7.8	37	79
D2107079	7.9	37	79
D2107080	8.0	37	79
D2107081	8.1	37	79
D2107082	8.2	37	79
D2107982	8.25	37	79
D2107083	8.3	37	79
D2107084	8.4	37	79
D2107085	8.5	37	79
D2107086	8.6	40	84
D2107087	8.7	40	84
D2107987	8.75	40	84
D2107088	8.8	40	84
D2107089	8.9	40	84
D2107090	9.0	40	84
D2107091	9.1	40	84
D2107092	9.2	40	84
D2107992	9.25	40	84
D2107093	9.3	40	84

▶ HSS-E(DL107) is available on your request.
▶ TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P															M					K									
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel						Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20										
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230										
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○											

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

D2107 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS

STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

▶**Surface treatment** : Coloring(Gold color)
▶**Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes

▶**Oberflächenbehandlung** : Coloring(Goldfarbe)
▶**Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken. Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.





DIN 1897 | HSS Co8 | 33° | h8 | 135° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2107993	9.35	40	84
D2107094	9.4	40	84
D2107095	9.5	40	84
D2107096	9.6	43	89
D2107097	9.7	43	89
D2107997	9.75	43	89
D2107098	9.8	43	89
D2107099	9.9	43	89
D2107100	10.0	43	89
D2107102	10.2	43	89
D2107802	10.25	43	89
D2107105	10.5	43	89
D2107807	10.75	47	95
D2107110	11.0	47	95
D2107812	11.25	47	95
D2107115	11.5	47	95
D2107817	11.75	47	95
D2107118	11.8	47	95
D2107120	12.0	51	102
D2107822	12.25	51	102
D2107125	12.5	51	102
D2107827	12.75	51	102
D2107130	13.0	51	102
D2107832	13.25	54	107
D2107135	13.5	54	107
D2107837	13.75	54	107

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2107138	13.8	54	107
D2107140	14.0	54	107
D2107842	14.25	56	111
D2107145	14.5	56	111
D2107847	14.75	56	111
D2107150	15.0	56	111
D2107852	15.25	58	115
D2107155	15.5	58	115
D2107857	15.75	58	115
D2107160	16.0	58	115
D2107862	16.25	60	119
D2107165	16.5	60	119
D2107867	16.75	60	119
D2107170	17.0	60	119
D2107872	17.25	62	123
D2107175	17.5	62	123
D2107877	17.75	62	123
D2107180	18.0	62	123
D2107882	18.25	64	127
D2107185	18.5	64	127
D2107887	18.75	64	127
D2107190	19.0	64	127
D2107892	19.25	66	131
D2107195	19.5	66	131
D2107897	19.75	66	131
D2107200	20.0	66	131

▶ HSS-E(DL107) is available on your request.
▶ TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M						K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS
D2107 SERIES
HSSCo8, STRAIGHT SHANK TWIST DRILLS
STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA
HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSSCo8, queue cylindrique, Forme C, série extra-courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8
▶Surface treatment : Coloring(Gold color)
▶Application : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes
▶Oberflächenbehandlung : Coloring(Goldfarbe)
▶Verwendung : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken. Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.





DIN 1897 | HSS Co8 | 33° | h8 | 135° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2107205	20.5	68	136
D2107210	21.0	68	136
D2107215	21.5	70	141
D2107220	22.0	70	141
D2107225	22.5	72	146
D2107230	23.0	72	146
D2107235	23.5	72	146
D2107240	24.0	75	151

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2107245	24.5	75	151
D2107250	25.0	75	151
D2107260	26.0	78	156
D2107270	27.0	81	162
D2107280	28.0	81	162
D2107290	29.0	84	168
D2107300	30.0	84	168
D2107310	31.0	87	174

▶ HSS-E(DL107) is available on your request.
▶ TiN(D4107), TiCN(D7107) and TiAlN(DQ107) are available on your request.

◎ : Excellent ○ : Good

ISO	P																			M						K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

D1107 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série extra-courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

▶**Surface treatment** : Steam Tempered(Black Oxide Finish) Bright Finish under 2mm
▶**Application** : Suitable for drilling thin materials with portable electric drills. Special twist drills for automatic and turret lathes.

▶**Oberflächenbehandlung** : Steam Homo(Scwarzoxidation) Helle Beschaffenheit unter 2mm
▶**Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken. Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.



DIN 1897 | HSS | N 20~30° | h8 | 118° | P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1107010	1.0	6	26
D1107011	1.1	7	28
D1107012	1.2	8	30
D1107912	1.25	8	30
D1107013	1.3	8	30
D1107014	1.4	9	32
D1107015	1.5	9	32
D1107016	1.6	9	34
D1107017	1.7	10	34
D1107917	1.75	11	36
D1107018	1.8	11	36
D1107019	1.9	11	36
D1107020	2.0	12	38
D1107021	2.1	12	38
D1107022	2.2	13	40
D1107922	2.25	13	40
D1107023	2.3	13	40
D1107024	2.4	14	43
D1107025	2.5	14	43
D1107026	2.6	14	43
D1107027	2.7	16	46
D1107927	2.75	16	46
D1107028	2.8	16	46
D1107029	2.9	16	46
D1107030	3.0	16	46
D1107031	3.1	18	49

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1107032	3.2	18	49
D1107932	3.25	18	49
D1107033	3.3	18	49
D1107034	3.4	20	52
D1107035	3.5	20	52
D1107036	3.6	20	52
D1107037	3.7	20	52
D1107937	3.75	20	52
D1107038	3.8	22	55
D1107039	3.9	22	55
D1107040	4.0	22	55
D1107041	4.1	22	55
D1107042	4.2	22	55
D1107942	4.25	22	55
D1107043	4.3	24	58
D1107044	4.4	24	58
D1107045	4.5	24	58
D1107046	4.6	24	58
D1107047	4.7	24	58
D1107947	4.75	24	58
D1107048	4.8	26	62
D1107049	4.9	26	62
D1107050	5.0	26	62
D1107051	5.1	26	62
D1107052	5.2	26	62
D1107952	5.25	26	62

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS
D1107 SERIES
HSS, STRAIGHT SHANK TWIST DRILLS
STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA
HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série extra-courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS
▶Surface treatment : Steam Tempered(Black Oxide Finish)
▶Application : Suitable for drilling thin materials with portable electric drills. Special twist drills for automatic and turret lathes.
▶Oberflächenbehandlung : Steam Homo(Scwarzoxidation)
▶Verwendung : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken. Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.



DIN 1897 | HSS | N 20~30° | h8 | 118° | P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1107053	5.3	26	62
D1107054	5.4	28	66
D1107055	5.5	28	66
D1107056	5.6	28	66
D1107057	5.7	28	66
D1107957	5.75	28	66
D1107058	5.8	28	66
D1107059	5.9	28	66
D1107060	6.0	28	66
D1107061	6.1	31	70
D1107062	6.2	31	70
D1107962	6.25	31	70
D1107063	6.3	31	70
D1107064	6.4	31	70
D1107065	6.5	31	70
D1107066	6.6	31	70
D1107067	6.7	31	70
D1107967	6.75	34	74
D1107068	6.8	34	74
D1107069	6.9	34	74
D1107070	7.0	34	74
D1107071	7.1	34	74
D1107072	7.2	34	74
D1107972	7.25	34	74
D1107073	7.3	34	74
D1107074	7.4	34	74

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1107075	7.5	34	74
D1107076	7.6	37	79
D1107077	7.7	37	79
D1107977	7.75	37	79
D1107078	7.8	37	79
D1107079	7.9	37	79
D1107080	8.0	37	79
D1107081	8.1	37	79
D1107082	8.2	37	79
D1107982	8.25	37	79
D1107083	8.3	37	79
D1107084	8.4	37	79
D1107085	8.5	37	79
D1107086	8.6	40	84
D1107087	8.7	40	84
D1107987	8.75	40	84
D1107088	8.8	40	84
D1107089	8.9	40	84
D1107090	9.0	40	84
D1107091	9.1	40	84
D1107092	9.2	40	84
D1107992	9.25	40	84
D1107093	9.3	40	84
D1107094	9.4	40	84
D1107095	9.5	40	84
D1107096	9.6	43	89

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

D1107 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série extra-courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

▶**Surface treatment** : Steam Tempered(Black Oxide Finish)
▶**Application** : Suitable for drilling thin materials with portable electric drills.
Special twist drills for automatic and turret lathes.

▶**Oberflächenbehandlung** : Steam Homo(Scwarzoxidation)
▶**Verwendung** : Sonderbohrer zum Einsatz auf Automaten und Revolverdrehbänken. Geeignet für den Einsatz in Handbohrmaschinen zum Bohren von dünnwandigem Material.



DIN 1897 | HSS | N 20~30° | h8 | 118° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1107097	9.7	43	89
D1107997	9.75	43	89
D1107098	9.8	43	89
D1107099	9.9	43	89
D1107100	10.0	43	89
D1107802	10.25	43	89
D1107105	10.5	43	89
D1107807	10.75	47	95
D1107110	11.0	47	95

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1107812	11.25	47	95
D1107115	11.5	47	95
D1107817	11.75	47	95
D1107120	12.0	51	102
D1107822	12.25	51	102
D1107125	12.5	51	102
D1107827	12.75	51	102
D1107130	13.0	51	102

◎ : Excellent ○ : Good

ISO	P															M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○		

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS

D2105 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS

JOBBER
KURZ
COURTE
CORTA

HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSSCo8, queue cylindrique, Forme C, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

▶**Surface treatment** : Coloring(Gold color)
▶**Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

▶**Oberflächenbehandlung** : Coloring(Goldfarbe)
▶**Verwendung** : Zum Bohren von rostfreien und austenitischen, Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.



DIN 338 | HSS Co8 | 33° | h8 | 135° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2105010	1.0	12	34
D2105011	1.1	14	36
D2105012	1.2	16	38
D2105912	1.25	16	38
D2105013	1.3	16	38
D2105014	1.4	18	40
D2105015	1.5	18	40
D2105016	1.6	20	43
D2105017	1.7	20	43
D2105917	1.75	22	46
D2105018	1.8	22	46
D2105019	1.9	22	46
D2105020	2.0	24	49
D2105021	2.1	24	49
D2105022	2.2	27	53
D2105922	2.25	27	53
D2105023	2.3	27	53
D2105024	2.4	30	57
D2105025	2.5	30	57
D2105026	2.6	30	57
D2105027	2.7	33	61
D2105927	2.75	33	61
D2105028	2.8	33	61
D2105029	2.9	33	61
D2105030	3.0	33	61
D2105031	3.1	36	65

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2105032	3.2	36	65
D2105932	3.25	36	65
D2105033	3.3	36	65
D2105034	3.4	39	70
D2105035	3.5	39	70
D2105036	3.6	39	70
D2105037	3.7	39	70
D2105937	3.75	39	70
D2105038	3.8	43	75
D2105039	3.9	43	75
D2105040	4.0	43	75
D2105041	4.1	43	75
D2105042	4.2	43	75
D2105942	4.25	43	75
D2105043	4.3	47	80
D2105044	4.4	47	80
D2105045	4.5	47	80
D2105046	4.6	47	80
D2105047	4.7	47	80
D2105947	4.75	47	80
D2105048	4.8	52	86
D2105049	4.9	52	86
D2105050	5.0	52	86
D2105051	5.1	52	86
D2105052	5.2	52	86
D2105952	5.25	52	86

▶ TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P															M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○		

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS

D2105 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS

JOBBER
KURZ
COURTE
CORTA

HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSSCo8, queue cylindrique, Forme C, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

▶**Surface treatment** : Coloring(Gold color)
▶**Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

▶**Oberflächenbehandlung** : Coloring(Goldfarbe)
▶**Verwendung** : Zum Bohren von rostfreien und austenitischen, Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.





DIN 338 | HSS Co8 | 33° | h8 | 135° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2105053	5.3	52	86
D2105054	5.4	57	93
D2105055	5.5	57	93
D2105056	5.6	57	93
D2105057	5.7	57	93
D2105957	5.75	57	93
D2105058	5.8	57	93
D2105059	5.9	57	93
D2105060	6.0	57	93
D2105061	6.1	63	101
D2105062	6.2	63	101
D2105962	6.25	63	101
D2105063	6.3	63	101
D2105064	6.4	63	101
D2105065	6.5	63	101
D2105066	6.6	63	101
D2105067	6.7	63	101
D2105967	6.75	69	109
D2105068	6.8	69	109
D2105069	6.9	69	109
D2105070	7.0	69	109
D2105071	7.1	69	109
D2105072	7.2	69	109
D2105972	7.25	69	109
D2105073	7.3	69	109
D2105074	7.4	69	109

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2105075	7.5	69	109
D2105076	7.6	75	117
D2105077	7.7	75	117
D2105977	7.75	75	117
D2105078	7.8	75	117
D2105079	7.9	75	117
D2105080	8.0	75	117
D2105081	8.1	75	117
D2105082	8.2	75	117
D2105982	8.25	75	117
D2105083	8.3	75	117
D2105084	8.4	75	117
D2105085	8.5	75	117
D2105086	8.6	81	125
D2105087	8.7	81	125
D2105987	8.75	81	125
D2105088	8.8	81	125
D2105089	8.9	81	125
D2105090	9.0	81	125
D2105091	9.1	81	125
D2105092	9.2	81	125
D2105992	9.25	81	125
D2105093	9.3	81	125
D2105094	9.4	81	125
D2105095	9.5	81	125
D2105096	9.6	87	133

▶ TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS
D2105 SERIES
HSSCo8, STRAIGHT SHANK TWIST DRILLS
JOBBER
KURZ
COURTE
CORTA
HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSSCo8, queue cylindrique, Forme C, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8
▶Surface treatment : Coloring(Gold color)
▶Application : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.
▶Oberflächenbehandlung : Coloring(Goldfarbe)
▶Verwendung : Zum Bohren von rostfreien und austenitischen, Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.





DIN 338 | HSS Co8 | 33° | h8 | 135° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2105097	9.7	87	133
D2105997	9.75	87	133
D2105098	9.8	87	133
D2105099	9.9	87	133
D2105100	10.0	87	133
D2105102	10.2	87	133
D2105105	10.5	87	133
D2105110	11.0	94	142
D2105115	11.5	94	142
D2105120	12.0	101	151
D2105125	12.5	101	151
D2105130	13.0	101	151
D2105135	13.5	108	160

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2105140	14.0	108	160
D2105145	14.5	114	169
D2105150	15.0	114	169
D2105155	15.5	120	178
D2105160	16.0	120	178
D2105165	16.5	125	184
D2105170	17.0	125	184
D2105175	17.5	130	191
D2105180	18.0	130	191
D2105185	18.5	135	198
D2105190	19.0	135	198
D2105195	19.5	140	205
D2105200	20.0	140	205

▶ TiN(D4105), TiCN(D7105) and TiAlN(DQ105) are available on your request.

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

DL105 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS

JOBBER
KURZ
COURTE
CORTA

HSS-E, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS-E, queue cylindrique, Forme C, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS - E

▶**Surface treatment** : Coloring(Gold color)
▶**Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

▶**Oberflächenbehandlung** : Coloring(Goldfarbe)
▶**Verwendung** : Zum Bohren von rostfreien und austenitischen, Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.



DIN 338 | HSS-E | 33° | h8 | 135° | P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL105010	1.0	12	34
DL105011	1.1	14	36
DL105012	1.2	16	38
DL105912	1.25	16	38
DL105013	1.3	16	38
DL105014	1.4	18	40
DL105015	1.5	18	40
DL105016	1.6	20	43
DL105017	1.7	20	43
DL105917	1.75	22	46
DL105018	1.8	22	46
DL105019	1.9	22	46
DL105020	2.0	24	49
DL105021	2.1	24	49
DL105022	2.2	27	53
DL105922	2.25	27	53
DL105023	2.3	27	53
DL105024	2.4	30	57
DL105025	2.5	30	57
DL105026	2.6	30	57
DL105027	2.7	33	61
DL105927	2.75	33	61
DL105028	2.8	33	61
DL105029	2.9	33	61
DL105030	3.0	33	61
DL105031	3.1	36	65

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL105032	3.2	36	65
DL105932	3.25	36	65
DL105033	3.3	36	65
DL105034	3.4	39	70
DL105035	3.5	39	70
DL105036	3.6	39	70
DL105037	3.7	39	70
DL105937	3.75	39	70
DL105038	3.8	43	75
DL105039	3.9	43	75
DL105040	4.0	43	75
DL105041	4.1	43	75
DL105042	4.2	43	75
DL105942	4.25	43	75
DL105043	4.3	47	80
DL105044	4.4	47	80
DL105045	4.5	47	80
DL105046	4.6	47	80
DL105047	4.7	47	80
DL105947	4.75	47	80
DL105048	4.8	52	86
DL105049	4.9	52	86
DL105050	5.0	52	86
DL105051	5.1	52	86
DL105052	5.2	52	86
DL105952	5.25	52	86

▶ TiN(DN105), TiCN(DX105) and TiAlN(DT105) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS
DL105 SERIES
HSS-E, STRAIGHT SHANK TWIST DRILLS
JOBBER
KURZ
COURTE
CORTA
HSS-E, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS-E, queue cylindrique, Forme C, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS - E
▶Surface treatment : Coloring(Gold color)
▶Application : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.
▶Oberflächenbehandlung : Coloring(Goldfarbe)
▶Verwendung : Zum Bohren von rostfreien und austenitischen, Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.



DIN 338 | HSS-E | 33° | h8 | 135° | P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL105053	5.3	52	86
DL105054	5.4	57	93
DL105055	5.5	57	93
DL105056	5.6	57	93
DL105057	5.7	57	93
DL105957	5.75	57	93
DL105058	5.8	57	93
DL105059	5.9	57	93
DL105060	6.0	57	93
DL105061	6.1	63	101
DL105062	6.2	63	101
DL105962	6.25	63	101
DL105063	6.3	63	101
DL105064	6.4	63	101
DL105065	6.5	63	101
DL105066	6.6	63	101
DL105067	6.7	63	101
DL105967	6.75	69	109
DL105068	6.8	69	109
DL105069	6.9	69	109
DL105070	7.0	69	109
DL105071	7.1	69	109
DL105072	7.2	69	109
DL105972	7.25	69	109
DL105073	7.3	69	109
DL105074	7.4	69	109

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL105075	7.5	69	109
DL105076	7.6	75	117
DL105077	7.7	75	117
DL105977	7.75	75	117
DL105078	7.8	75	117
DL105079	7.9	75	117
DL105080	8.0	75	117
DL105081	8.1	75	117
DL105082	8.2	75	117
DL105982	8.25	75	117
DL105083	8.3	75	117
DL105084	8.4	75	117
DL105085	8.5	75	117
DL105086	8.6	81	125
DL105087	8.7	81	125
DL105987	8.75	81	125
DL105088	8.8	81	125
DL105089	8.9	81	125
DL105090	9.0	81	125
DL105091	9.1	81	125
DL105092	9.2	81	125
DL105992	9.25	81	125
DL105093	9.3	81	125
DL105094	9.4	81	125
DL105095	9.5	81	125
DL105096	9.6	87	133

▶ TiN(DN105), TiCN(DX105) and TiAlN(DT105) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

DL105 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS — JOBBER

HSS-E, SPIRALBOHRER mit ZYLINDERSCHAFT — KURZ
Forets HSS-E, queue cylindrique, Forme C, série courte — COURTE
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS - E — CORTA

▶**Surface treatment** : Coloring(Gold color)
▶**Application** : Drilling stainless steels and difficult - to - cut materials such as titanium and inconel.

▶**Oberflächenbehandlung** : Coloring(Goldfarbe)
▶**Verwendung** : Zum Bohren von rostfreien und austenitischen, Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.





DIN 338 | HSS-E | 33° | h8 | 135° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL105097	9.7	87	133
DL105997	9.75	87	133
DL105098	9.8	87	133
DL105099	9.9	87	133
DL105100	10.0	87	133
DL105102	10.2	87	133
DL105105	10.5	87	133
DL105110	11.0	94	142
DL105115	11.5	94	142
DL105120	12.0	101	151
DL105125	12.5	101	151
DL105130	13.0	101	151
DL105135	13.5	108	160

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL105140	14.0	108	160
DL105145	14.5	114	169
DL105150	15.0	114	169
DL105155	15.5	120	178
DL105160	16.0	120	178
DL105165	16.5	125	184
DL105170	17.0	125	184
DL105175	17.5	130	191
DL105180	18.0	130	191
DL105185	18.5	135	198
DL105190	19.0	135	198
DL105195	19.5	140	205
DL105200	20.0	140	205

▶ TiN(DN105), TiCN(DX105) and TiAlN(DT105) are available on your request.

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel									Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials				Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS — JOBBER

HSS, SPIRALBOHRER mit ZYLINDERSCHAFT — KURZ
Forets HSS, queue cylindrique, série courte — COURTE
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS — CORTA

▶**Surface treatment** : Steam Tempered(Black Oxide Finish) Bright Finish under 2mm
▶**Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

▶**Oberflächenbehandlung** : Steam Homo(Schwarzoxidation) Helle Beschaffenheit unter 2mm
▶**Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.



DIN 338 | HSS | N 20~30° | h8 | 118° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105003	0.3	3	19
D1105004	0.4	5	20
D1105005	0.5	6	22
D1105006	0.6	7	24
D1105007	0.7	9	28
D1105008	0.8	10	30
D1105009	0.9	11	32
D1105010	1.0	12	34
D1105910	1.05	12	34
D1105011	1.1	14	36
D1105911	1.15	14	36
D1105012	1.2	16	38
D1105912	1.25	16	38
D1105013	1.3	16	38
D1105913	1.35	18	40
D1105014	1.4	18	40
D1105914	1.45	18	40
D1105015	1.5	18	40
D1105915	1.55	20	43
D1105016	1.6	20	43
D1105916	1.65	20	43
D1105017	1.7	20	43
D1105917	1.75	22	46
D1105018	1.8	22	46
D1105918	1.85	22	46
D1105019	1.9	22	46

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105919	1.95	24	49
D1105020	2.0	24	49
D1105920	2.05	24	49
D1105021	2.1	24	49
D1105921	2.15	27	53
D1105022	2.2	27	53
D1105922	2.25	27	53
D1105023	2.3	27	53
D1105923	2.35	27	53
D1105024	2.4	30	57
D1105924	2.45	30	57
D1105025	2.5	30	57
D1105925	2.55	30	57
D1105026	2.6	30	57
D1105926	2.65	30	57
D1105027	2.7	33	61
D1105927	2.75	33	61
D1105028	2.8	33	61
D1105928	2.85	33	61
D1105029	2.9	33	61
D1105929	2.95	33	61
D1105030	3.0	33	61
D1105930	3.05	36	65
D1105031	3.1	36	65
D1105931	3.15	36	65
D1105032	3.2	36	65

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel									Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○												

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials				Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER
KURZ
COURTE
CORTA

HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

▶Surface treatment : Steam Tempered(Black Oxide Finish) Bright Finish under 2mm
▶Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

▶Oberflächenbehandlung : Steam Homo(Scwarzoxidation) Helle Beschaffenheit unter 2mm
▶Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Tempergu ß, Sphäroguß, Sintereisen, Graphite.



DIN 338 | HSS | N 20~30° | h8 | 118° | P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105932	3.25	36	65
D1105033	3.3	36	65
D1105933	3.35	36	65
D1105034	3.4	39	70
D1105934	3.45	39	70
D1105035	3.5	39	70
D1105935	3.55	39	70
D1105036	3.6	39	70
D1105936	3.65	39	70
D1105037	3.7	39	70
D1105937	3.75	39	70
D1105038	3.8	43	75
D1105938	3.85	43	75
D1105039	3.9	43	75
D1105939	3.95	43	75
D1105040	4.0	43	75
D1105940	4.05	43	75
D1105041	4.1	43	75
D1105941	4.15	43	75
D1105042	4.2	43	75
D1105942	4.25	43	75
D1105043	4.3	47	80
D1105943	4.35	47	80
D1105044	4.4	47	80
D1105944	4.45	47	80
D1105045	4.5	47	80

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105945	4.55	47	80
D1105046	4.6	47	80
D1105946	4.65	47	80
D1105047	4.7	47	80
D1105947	4.75	47	80
D1105048	4.8	52	86
D1105948	4.85	52	86
D1105049	4.9	52	86
D1105949	4.95	52	86
D1105050	5.0	52	86
D1105950	5.05	52	86
D1105051	5.1	52	86
D1105951	5.15	52	86
D1105052	5.2	52	86
D1105952	5.25	52	86
D1105053	5.3	52	86
D1105953	5.35	57	93
D1105054	5.4	57	93
D1105954	5.45	57	93
D1105055	5.5	57	93
D1105955	5.55	57	93
D1105056	5.6	57	93
D1105956	5.65	57	93
D1105057	5.7	57	93
D1105957	5.75	57	93
D1105058	5.8	57	93

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M							K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel									Stainless steel							Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20													
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21													
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230													
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○														

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS
D1105 SERIES
HSS, STRAIGHT SHANK TWIST DRILLS
JOBBER
KURZ
COURTE
CORTA
HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS
▶Surface treatment : Steam Tempered(Black Oxide Finish) Bright Finish under 2mm
▶Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.
▶Oberflächenbehandlung : Steam Homo(Scwarzoxidation) Helle Beschaffenheit unter 2mm
▶Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Tempergu ß, Sphäroguß, Sintereisen, Graphite.



DIN 338 | HSS | N 20~30° | h8 | 118° | P.276-277
Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105958	5.85	57	93
D1105059	5.9	57	93
D1105959	5.95	57	93
D1105060	6.0	57	93
D1105960	6.05	63	101
D1105061	6.1	63	101
D1105961	6.15	63	101
D1105062	6.2	63	101
D1105962	6.25	63	101
D1105063	6.3	63	101
D1105963	6.35	63	101
D1105064	6.4	63	101
D1105964	6.45	63	101
D1105065	6.5	63	101
D1105965	6.55	63	101
D1105066	6.6	63	101
D1105966	6.65	63	101
D1105067	6.7	63	101
D1105967	6.75	69	109
D1105068	6.8	69	109
D1105968	6.85	69	109
D1105069	6.9	69	109
D1105969	6.95	69	109
D1105070	7.0	69	109
D1105970	7.05	69	109
D1105071	7.1	69	109

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105971	7.15	69	109
D1105072	7.2	69	109
D1105972	7.25	69	109
D1105073	7.3	69	109
D1105973	7.35	69	109
D1105074	7.4	69	109
D1105974	7.45	69	109
D1105075	7.5	69	109
D1105975	7.55	75	117
D1105076	7.6	75	117
D1105976	7.65	75	117
D1105077	7.7	75	117
D1105977	7.75	75	117
D1105078	7.8	75	117
D1105978	7.85	75	117
D1105079	7.9	75	117
D1105979	7.95	75	117
D1105080	8.0	75	117
D1105081	8.1	75	117
D1105082	8.2	75	117
D1105982	8.25	75	117
D1105083	8.3	75	117
D1105084	8.4	75	117
D1105085	8.5	75	117
D1105086	8.6	81	125
D1105087	8.7	81	125

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M							K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel									Stainless steel							Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20													
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21													
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230													
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○														

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

D1105 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER
KURZ
COURTE
CORTA

HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

▶Surface treatment : Steam Tempered(Black Oxide Finish) Bright Finish under 2mm
▶Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

▶Oberflächenbehandlung : Steam Homo(Scwarzoxidation) Helle Beschaffenheit unter 2mm
▶Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Tempergu ß, Sphäroguß, Sintereisen, Graphite.



DIN 338 | HSS | N 20~30° | h8 | 118° | P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105987	8.75	81	125
D1105088	8.8	81	125
D1105089	8.9	81	125
D1105090	9.0	81	125
D1105091	9.1	81	125
D1105092	9.2	81	125
D1105992	9.25	81	125
D1105093	9.3	81	125
D1105094	9.4	81	125
D1105095	9.5	81	125
D1105096	9.6	87	133
D1105097	9.7	87	133
D1105997	9.75	87	133
D1105098	9.8	87	133
D1105099	9.9	87	133
D1105100	10.0	87	133
D1105101	10.1	87	133
D1105102	10.2	87	133
D1105802	10.25	87	133
D1105103	10.3	87	133
D1105104	10.4	87	133
D1105105	10.5	87	133
D1105106	10.6	87	133
D1105107	10.7	94	142
D1105807	10.75	94	142
D1105108	10.8	94	142

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105109	10.9	94	142
D1105110	11.0	94	142
D1105111	11.1	94	142
D1105112	11.2	94	142
D1105812	11.25	94	142
D1105113	11.3	94	142
D1105114	11.4	94	142
D1105115	11.5	94	142
D1105116	11.6	94	142
D1105117	11.7	94	142
D1105817	11.75	94	142
D1105118	11.8	94	142
D1105119	11.9	101	151
D1105120	12.0	101	151
D1105121	12.1	101	151
D1105122	12.2	101	151
D1105822	12.25	101	151
D1105123	12.3	101	151
D1105124	12.4	101	151
D1105125	12.5	101	151
D1105126	12.6	101	151
D1105127	12.7	101	151
D1105827	12.75	101	151
D1105128	12.8	101	151
D1105129	12.9	101	151
D1105130	13.0	101	151

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20										
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230										
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○											

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS
D1105 SERIES
HSS, STRAIGHT SHANK TWIST DRILLS
JOBBER
KURZ
COURTE
CORTA
HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS
▶Surface treatment : Steam Tempered(Black Oxide Finish) Bright Finish under 2mm
▶Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.
▶Oberflächenbehandlung : Steam Homo(Scwarzoxidation) Helle Beschaffenheit unter 2mm
▶Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Tempergu ß, Sphäroguß, Sintereisen, Graphite.



DIN 338 | HSS | N 20~30° | h8 | 118° | P.276-277
Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105832	13.25	108	160
D1105135	13.5	108	160
D1105837	13.75	108	160
D1105140	14.0	108	160
D1105842	14.25	114	169
D1105145	14.5	114	169
D1105847	14.75	114	169
D1105150	15.0	114	169
D1105852	15.25	120	178
D1105155	15.5	120	178
D1105857	15.75	120	178
D1105160	16.0	120	178
D1105862	16.25	125	184
D1105165	16.5	125	184

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1105867	16.75	125	184
D1105170	17.0	125	184
D1105872	17.25	130	191
D1105175	17.5	130	191
D1105877	17.75	130	191
D1105180	18.0	130	191
D1105882	18.25	135	198
D1105185	18.5	135	198
D1105887	18.75	135	198
D1105190	19.0	135	198
D1105892	19.25	140	205
D1105195	19.5	140	205
D1105897	19.75	140	205
D1105200	20.0	140	205

◎ : Excellent ○ : Good

ISO	P																			M					K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20										
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230										
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○											

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS

D1125 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

JOBBER
KURZ
COURTE
CORTA

HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

▶Surface treatment : Bright Finish
▶Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

▶Oberflächenbehandlung : Helle Beschaffenheit
▶Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.



DIN 338 | HSS | N 20~30° | h8 | 118° | P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1125020	2.0	24	49
D1125021	2.1	24	49
D1125022	2.2	27	53
D1125023	2.3	27	53
D1125024	2.4	30	57
D1125025	2.5	30	57
D1125026	2.6	30	57
D1125027	2.7	33	61
D1125028	2.8	33	61
D1125029	2.9	33	61
D1125030	3.0	33	61
D1125031	3.1	36	65
D1125032	3.2	36	65
D1125033	3.3	36	65
D1125034	3.4	39	70
D1125035	3.5	39	70
D1125036	3.6	39	70
D1125037	3.7	39	70
D1125038	3.8	43	75
D1125039	3.9	43	75
D1125040	4.0	43	75
D1125041	4.1	43	75
D1125042	4.2	43	75
D1125043	4.3	47	80
D1125044	4.4	47	80
D1125045	4.5	47	80

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1125046	4.6	47	80
D1125047	4.7	47	80
D1125048	4.8	52	86
D1125049	4.9	52	86
D1125050	5.0	52	86
D1125051	5.1	52	86
D1125052	5.3	52	86
D1125053	5.3	52	86
D1125054	5.4	57	93
D1125055	5.5	57	93
D1125056	5.6	57	93
D1125057	5.7	57	93
D1125058	5.8	57	93
D1125059	5.9	57	93
D1125060	6.0	57	93
D1125061	6.1	63	101
D1125062	6.2	63	101
D1125063	6.3	63	101
D1125064	6.4	63	101
D1125065	6.5	63	101
D1125066	6.6	63	101
D1125067	6.7	63	101
D1125068	6.8	69	109
D1125069	6.9	69	109
D1125070	7.0	69	109
D1125071	7.1	69	109

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P															M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel					Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20							
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21							
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230							
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○								

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS
D1125 SERIES
HSS, STRAIGHT SHANK TWIST DRILLS
JOBBER
KURZ
COURTE
CORTA
HSS, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS
▶Surface treatment : Bright Finish
▶Application : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.
▶Oberflächenbehandlung : Helle Beschaffenheit
▶Verwendung : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.



DIN 338 | HSS | N 20~30° | h8 | 118° | P.276-277
Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1125072	7.2	69	109
D1125073	7.3	69	109
D1125074	7.4	69	109
D1125075	7.5	69	109
D1125076	7.6	75	117
D1125077	7.7	75	117
D1125078	7.8	75	117
D1125079	7.9	75	117
D1125080	8.0	75	117
D1125081	8.1	75	117
D1125082	8.2	75	117
D1125083	8.3	75	117
D1125084	8.4	75	117
D1125085	8.5	75	117
D1125086	8.6	81	125
D1125087	8.7	81	125
D1125088	8.8	81	125
D1125089	8.9	81	125
D1125090	9.0	81	125
D1125091	9.1	81	125
D1125092	9.2	81	125
D1125093	9.3	81	125
D1125094	9.4	81	125
D1125095	9.5	81	125
D1125096	9.6	87	133
D1125097	9.7	87	133

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1125098	9.8	87	133
D1125099	9.9	87	133
D1125100	10.0	87	133
D1125101	10.1	87	133
D1125102	10.2	87	133
D1125103	10.3	87	133
D1125104	10.4	87	133
D1125105	10.5	87	133
D1125106	10.6	87	133
D1125107	10.7	94	142
D1125108	10.8	94	142
D1125109	10.9	94	142
D1125110	11.0	94	142
D1125111	11.1	94	142
D1125112	11.2	94	142
D1125113	11.3	94	142
D1125114	11.4	94	142
D1125115	11.5	94	142
D1125116	11.6	94	142
D1125117	11.7	94	142
D1125118	11.8	94	142
D1125119	11.9	101	151
D1125120	12.0	101	151
D1125121	12.1	101	151
D1125122	12.2	101	151
D1125123	12.3	101	151

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P															M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20							
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21							
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230							
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○								

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

D1125 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS — *JOBBER*

HSS, SPIRALBOHRER mit ZYLINDERSCHAFT — *KURZ*
Forets HSS, queue cylindrique, série courte — *COURTE*
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS — *CORTA*

▶**Surface treatment** : Bright Finish
▶**Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

▶**Oberflächenbehandlung** : Helle Beschaffenheit
▶**Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphite.



DIN 338 | HSS | N 20~30° | h8 | 118° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1125124	12.4	101	151
D1125125	12.5	101	151
D1125126	12.6	101	151
D1125127	12.7	101	151
D1125128	12.8	101	151
D1125129	12.9	101	151
D1125130	13.0	101	151
D1125132	13.2	101	151
D1125133	13.3	108	160
D1125135	13.5	108	160
D1125140	14.0	108	160
D1125145	14.5	114	169

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1125150	15.0	114	169
D1125155	15.5	120	178
D1125160	16.0	120	178
D1125165	16.5	125	184
D1125170	17.0	125	184
D1125175	17.5	130	191
D1125180	18.0	130	191
D1125185	18.5	135	198
D1125190	19.0	135	198
D1125195	19.5	140	205
D1125200	20.0	140	205

◎ : Excellent ○ : Good

ISO	P																				M							K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel										Stainless steel							Grey cast iron				Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20															
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21															
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230															
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○																

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS

D2104 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS — *LONG*

HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT — *LANG*
Forets HSSCo8, queue cylindrique, série longue — *LONGUE*
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8 — *LUNGA*

▶**Surface treatment** : Coloring(Gold color)
▶**Application** : Drilling deep holes in stainless steels and difficult - to - cut materials such as titanium and inconel.

▶**Oberflächenbehandlung** : Coloring(Goldfarbe)
▶**Verwendung** : Für Bohrarbeiten mit Bohrungen oder an tief liegenden Stellen. Zum Bohren von rostfreien und austenitischen Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.

DIN 340 | HSS Co8 | 33° | h8 | 135° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2104020	2.0	56	85
D2104021	2.1	56	85
D2104022	2.2	59	90
D2104023	2.3	59	90
D2104024	2.4	62	95
D2104025	2.5	62	95
D2104026	2.6	62	95
D2104027	2.7	66	100
D2104028	2.8	66	100
D2104029	2.9	66	100
D2104030	3.0	66	100
D2104031	3.1	69	106
D2104032	3.2	69	106
D2104033	3.3	69	106
D2104034	3.4	73	112
D2104035	3.5	73	112
D2104036	3.6	73	112
D2104037	3.7	73	112
D2104038	3.8	78	119
D2104039	3.9	78	119
D2104040	4.0	78	119
D2104041	4.1	78	119
D2104042	4.2	78	119
D2104043	4.3	82	126
D2104044	4.4	82	126
D2104045	4.5	82	126

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2104046	4.6	82	126
D2104047	4.7	82	126
D2104048	4.8	87	132
D2104049	4.9	87	132
D2104050	5.0	87	132
D2104051	5.1	87	132
D2104052	5.2	87	132
D2104053	5.3	87	132
D2104054	5.4	91	139
D2104055	5.5	91	139
D2104056	5.6	91	139
D2104057	5.7	91	139
D2104058	5.8	91	139
D2104059	5.9	91	139
D2104060	6.0	91	139
D2104061	6.1	97	148
D2104062	6.2	97	148
D2104063	6.3	97	148
D2104064	6.4	97	148
D2104065	6.5	97	148
D2104066	6.6	97	148
D2104067	6.7	97	148
D2104068	6.8	102	156
D2104069	6.9	102	156
D2104070	7.0	102	156
D2104071	7.1	102	156

▶ HSS-E(DL104) is available on your request.
▶ TiN(D4104), TiCN(D7104) and TiAlN(DQ104) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																				M							K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel										Stainless steel							Grey cast iron				Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20															
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21															
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230															
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○																

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

D2104 SERIES

HSSCo8, STRAIGHT SHANK TWIST DRILLS

LONG

HSSCo8, SPIRALBOHRER mit ZYLINDERSCHAFT
Forets HSSCo8, queue cylindrique, série longue
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSSCo8

LANG
LONGUE
LUNGA

▶**Surface treatment** : Coloring(Gold color)
▶**Application** : Drilling deep holes in stainless steels and difficult - to - cut materials such as titanium and inconel.

▶**Oberflächenbehandlung** : Coloring(Goldfarbe)
▶**Verwendung** : Für Bohrarbeiten mit Bohrbuchsen oder an tief liegenden Stellen. Zum Bohren von rostfreien und austenitischen, Stählen, schwerzerspanbaren Werkstoffen wie Titan und Inconel.

DIN 340 | HSS Co8 | 33° | h8 | 135° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2104072	7.2	102	156
D2104073	7.3	102	156
D2104074	7.4	102	156
D2104075	7.5	102	156
D2104076	7.6	109	165
D2104077	7.7	109	165
D2104078	7.8	109	165
D2104079	7.9	109	165
D2104080	8.0	109	165
D2104081	8.1	109	165
D2104082	8.2	109	165
D2104083	8.3	109	165
D2104084	8.4	109	165
D2104085	8.5	109	165
D2104086	8.6	115	175
D2104087	8.7	115	175
D2104088	8.8	115	175
D2104089	8.9	115	175
D2104090	9.0	115	175

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D2104091	9.1	115	175
D2104092	9.2	115	175
D2104093	9.3	115	175
D2104094	9.4	115	175
D2104095	9.5	115	175
D2104096	9.6	121	184
D2104097	9.7	121	184
D2104098	9.8	121	184
D2104099	9.9	121	184
D2104100	10.0	121	184
D2104102	10.2	121	184
D2104105	10.5	121	184
D2104108	10.8	128	195
D2104110	11.0	128	195
D2104112	11.2	128	195
D2104115	11.5	128	195
D2104118	11.8	128	195
D2104120	12.0	134	205

▶ HSS-E(DL104) is available on your request.
▶ TiN(D4104), TiCN(D7104) and TiAlN(DQ104) are available on your request.

◎ : Excellent ○ : Good

ISO	P																	M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20							
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21							
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230							
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○								

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
HB											15	30	25	38	34			55	60	42	55		
Recommended	○	○	○						○							○							

STRAIGHT SHANK DRILLS

D1121 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS

EXTRA LONG

HSS, SPIRALBOHRER MIT ZYLINDERSCHAFT
Forets HSS, queue cylindrique, série extra-longue
PUNTE ELICOIDALI, GAMBO CILINDRICO, HSS

ÜBERLANG
EXTRA-LONGUE
EXTRA LUNGA

▶**Surface treatment** : Steam Tempered(Black Oxide Finish)
▶**Application** : Designed for drilling deep holes or deeply located holes
Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

▶**Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
▶**Verwendung** : Standardbohrer zum Bohren extrem tiefer Löcher, zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphit.



DIN 1869/1 | HSS | N 20~30° | h8 | 118° P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1121020	2.0	85	125
D1121025	2.5	95	140
D1121030	3.0	100	150
D1121035	3.5	115	165
D1121040	4.0	120	175
D1121045	4.5	125	185
D1121050	5.0	135	195
D1121055	5.5	140	205
D1121060	6.0	140	205
D1121065	6.5	150	215
D1121070	7.0	155	225
D1121075	7.5	155	225

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1121080	8.0	165	240
D1121085	8.5	165	240
D1121090	9.0	175	250
D1121095	9.5	175	250
D1121100	10.0	185	265
D1121105	10.5	185	265
D1121110	11.0	195	280
D1121115	11.5	195	280
D1121120	12.0	205	295
D1121125	12.5	205	295
D1121130	13.0	205	295

◎ : Excellent ○ : Good

ISO	P																	M				K					
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20							
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21							
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230							
Recommended	◎	◎	◎	○		◎	○	○		○		○	○	○	○	○	○		○								

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550		
HB											15	30	25	38	34			55	60	42	55		
Recommended	○	○	○						○							○							

STRAIGHT SHANK DRILLS

DL109 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for HEAVY DUTY

JOBBER

HSS-E, SPIRALBOHRER für HOHE LEISTUNGEN mit ZYLINDERSCHAFT — *KURZ*

Forets HSS-E, queue cylindrique pour matériaux durs, série courte — *COURTE*

PUNTE ELICOIDALI PER IMPIEGHI GRAVOSI, GAMBO CILINDRICO, HSS - E — *CORTA*

▶**Application** : Drilling steels, cast steels alloyed and non-alloyed, grey cast iron, malleable cast iron and graphite.

▶**Verwendung** : Zum Bohren von Stahl und Stahlguß, Grauguß, Temperguß, Sphäroguß, Sintereisen, Graphit.

DIN 338 | HSS-E | N 20~30° | h8 | 118° | P.276-277

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL109015	1.5	18	40
DL109917	1.75	22	46
DL109020	2.0	24	49
DL109922	2.25	27	53
DL109025	2.5	30	57
DL109927	2.75	33	61
DL109030	3.0	33	61
DL109932	3.25	36	65
DL109035	3.5	39	70
DL109937	3.75	39	70
DL109040	4.0	43	75
DL109942	4.25	43	75
DL109045	4.5	47	80
DL109947	4.75	47	80
DL109050	5.0	52	86
DL109952	5.25	52	86
DL109055	5.5	57	93
DL109957	5.75	57	93
DL109060	6.0	57	93
DL109962	6.25	63	101
DL109065	6.5	63	101

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL109967	6.75	69	109
DL109070	7.0	69	109
DL109972	7.25	69	109
DL109075	7.5	69	109
DL109977	7.75	75	117
DL109080	8.0	75	117
DL109982	8.25	75	117
DL109085	8.5	75	117
DL109987	8.75	81	125
DL109090	9.0	81	125
DL109992	9.25	81	125
DL109095	9.5	81	125
DL109997	9.75	87	133
DL109100	10.0	87	133
DL109105	10.5	87	133
DL109110	11.0	94	142
DL109115	11.5	94	142
DL109120	12.0	101	151
DL109125	12.5	101	151
DL109130	13.0	101	151

▶ TiN(DN109), TiCN(DX109) and TiAlN(DT109) are available on your request.

◎ : Excellent ○ : Good

ISO	P															M					K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel						Stainless steel					Grey cast iron			Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20							
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21							
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230							
Recommended	◎	◎	◎	○		◎	○	○		○		◎	○	○	○	○	○		○								

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	○	○	○						○							○					

STRAIGHT SHANK DRILLS

D1100 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS for BRASS/BRONZE

JOBBER

HSS, SPIRALBOHRER für MESSING/BRONZE mit ZYLINDERSCHAFT — *KURZ*

Forets HSS, queue cylindrique pour Laiton/Bronze, série courte — *COURTE*

PUNTE ELICOIDALI, GAMBO CILINDRICO PER OTTONE (HSS) — *CORTA*

▶**Application** : Drilling hard, brittle and short-chip materials, i.e., brass, bronze, phosphor bronze and magnesium alloys.

▶**Verwendung** : Zum Bohren von harten und spröden Werkstoffen wie Messing, Magnesium-Legierungen, Bronze, Phosphorbronze.



DIN 338 | HSS | N 15~20° | h8 | 118° | P.278

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1100015	1.5	18	40
D1100016	1.6	20	43
D1100017	1.7	20	43
D1100018	1.8	22	46
D1100019	1.9	22	46
D1100020	2.0	24	49
D1100021	2.1	24	49
D1100022	2.2	27	53
D1100023	2.3	27	53
D1100024	2.4	30	57
D1100025	2.5	30	57
D1100026	2.6	30	57
D1100027	2.7	33	61
D1100028	2.8	33	61
D1100029	2.9	33	61
D1100030	3.0	33	61
D1100031	3.1	36	65
D1100032	3.2	36	65
D1100033	3.3	36	65
D1100034	3.4	39	70
D1100035	3.5	39	70
D1100036	3.6	39	70
D1100037	3.7	39	70
D1100038	3.8	43	75
D1100039	3.9	43	75
D1100040	4.0	43	75

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1100041	4.1	43	75
D1100042	4.2	43	75
D1100043	4.3	47	80
D1100044	4.4	47	80
D1100045	4.5	47	80
D1100046	4.6	47	80
D1100047	4.7	47	80
D1100048	4.8	52	86
D1100049	4.9	52	86
D1100050	5.0	52	86
D1100051	5.1	52	86
D1100052	5.2	52	86
D1100053	5.3	52	86
D1100054	5.4	57	93
D1100055	5.5	57	93
D1100056	5.6	57	93
D1100057	5.7	57	93
D1100058	5.8	57	93
D1100059	5.9	57	93
D1100060	6.0	57	93
D1100061	6.1	63	101
D1100062	6.2	63	101
D1100063	6.3	63	101
D1100064	6.4	63	101
D1100065	6.5	63	101
D1100066	6.6	63	101

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P															M					K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel						Stainless steel					Grey cast iron			Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20							
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21							
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230							
Recommended																											

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended							◎	◎													

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

D1100 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS for BRASS/BRONZE

JOBBER

HSS, SPIRALBOHRER für MESSING/BRONZE mit ZYLINDERSCHAFT — *KURZ*

Forets HSS, queue cylindrique pour Laiton/Bronze, série courte — *COURTE*

PUNTE ELICOIDALI, GAMBO CILINDRICO PER OTTONE (HSS) — *CORTA*

▶**Application** : Drilling hard, brittle and short-chip materials, i.e., brass, bronze, phosphor bronze and magnesium alloys.

▶**Verwendung** : Zum Bohren von harten und spröden Werkstoffen wie Messing, Magnesium-Legierungen, Bronze, Phosphorbronze.



DIN 338 | HSS | N 15~20° | h8 | 118° P.278

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1100067	6.7	63	101	D1100087	8.7	81	125
D1100068	6.8	69	109	D1100088	8.8	81	125
D1100069	6.9	69	109	D1100089	8.9	81	125
D1100070	7.0	69	109	D1100090	9.0	81	125
D1100071	7.1	69	109	D1100091	9.1	81	125
D1100072	7.2	69	109	D1100092	9.2	81	125
D1100073	7.3	69	109	D1100093	9.3	81	125
D1100074	7.4	69	109	D1100094	9.4	81	125
D1100075	7.5	69	109	D1100095	9.5	81	125
D1100076	7.6	75	117	D1100096	9.6	87	133
D1100077	7.7	75	117	D1100097	9.7	87	133
D1100078	7.8	75	117	D1100098	9.8	87	133
D1100079	7.9	75	117	D1100099	9.9	87	133
D1100080	8.0	75	117	D1100100	10.0	87	133
D1100081	8.1	75	117	D1100105	10.5	87	133
D1100082	8.2	75	117	D1100110	11.0	94	142
D1100083	8.3	75	117	D1100115	11.5	94	142
D1100084	8.4	75	117	D1100120	12.0	101	151
D1100085	8.5	75	117	D1100125	12.5	101	151
D1100086	8.6	81	125	D1100130	13.0	101	151

◎ : Excellent ○ : Good

ISO	P											M					K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended																						

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended							◎	◎													

STRAIGHT SHANK DRILLS

D1106 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS for ALUMINUM

JOBBER

HSS, SPIRALBOHRER für ALUMINIUM mit ZYLINDERSCHAFT — *KURZ*

Forets HSS, queue cylindrique pour ALU, Forme C, série courte — *COURTE*

PUNTE ELICOIDALI, GAMBO CILINDRICO, PER ALLUMINIO (HSS) — *CORTA*

▶**Application** : Drilling hard, brittle and short-chip materials, i.e., brass, bronze, phosphor bronze aluminum and magnesium alloys.

▶**Verwendung** : Zum Bohren von harten und spröden Werkstoffen wie Messing, Magnesium-Legierungen, Bronze, Phosphorbronze.

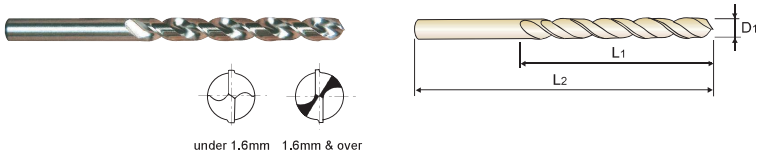

DIN 338 | HSS | 38° | h8 | 135° P.279

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1106015	1.5	18	40	D1106041	4.1	43	75
D1106016	1.6	20	43	D1106042	4.2	43	75
D1106017	1.7	20	43	D1106043	4.3	47	80
D1106018	1.8	22	46	D1106044	4.4	47	80
D1106019	1.9	22	46	D1106045	4.5	47	80
D1106020	2.0	24	49	D1106046	4.6	47	80
D1106021	2.1	24	49	D1106047	4.7	47	80
D1106022	2.2	27	53	D1106048	4.8	52	86
D1106023	2.3	27	53	D1106049	4.9	52	86
D1106024	2.4	30	57	D1106050	5.0	52	86
D1106025	2.5	30	57	D1106051	5.1	52	86
D1106026	2.6	30	57	D1106052	5.2	52	86
D1106027	2.7	33	61	D1106053	5.3	52	86
D1106028	2.8	33	61	D1106054	5.4	57	93
D1106029	2.9	33	61	D1106055	5.5	57	93
D1106030	3.0	33	61	D1106056	5.6	57	93
D1106031	3.1	36	65	D1106057	5.7	57	93
D1106032	3.2	36	65	D1106058	5.8	57	93
D1106033	3.3	36	65	D1106059	5.9	57	93
D1106034	3.4	39	70	D1106060	6.0	57	93
D1106035	3.5	39	70	D1106061	6.1	63	101
D1106036	3.6	39	70	D1106062	6.2	63	101
D1106037	3.7	39	70	D1106063	6.3	63	101
D1106038	3.8	43	75	D1106064	6.4	63	101
D1106039	3.9	43	75	D1106065	6.5	63	101
D1106040	4.0	43	75	D1106066	6.6	63	101

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M					K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended																						

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	◎	◎	◎	◎																	

STRAIGHT SHANK DRILLS

D1106 SERIES

HSS, STRAIGHT SHANK TWIST DRILLS for ALUMINUM

JOBBER
KURZ
COURTE
CORTA

HSS, SPIRALBOHRER für ALUMINIUM mit ZYLINDERSCHAFT
Forets HSS, queue cylindrique pour ALU, Forme C, série courte
PUNTE ELICOIDALI, GAMBO CILINDRICO, PER ALLUMINIO (HSS)

▶**Application** : Drilling hard, brittle and short-chip materials. i.e., brass, bronze, phosphor bronze aluminum and magnesium alloys.

▶**Verwendung** : Zum Bohren von harten und spröden Werkstoffen wie Messing, Magnesium-Legierungen, Bronze, Phosphorbronze.





DIN 338 | HSS | 38° | h8 | 135° | P.279

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1106067	6.7	63	101
D1106068	6.8	69	109
D1106069	6.9	69	109
D1106070	7.0	69	109
D1106071	7.1	69	109
D1106072	7.2	69	109
D1106073	7.3	69	109
D1106074	7.4	69	109
D1106075	7.5	69	109
D1106076	7.6	75	117
D1106077	7.7	75	117
D1106078	7.8	75	117
D1106079	7.9	75	117
D1106080	8.0	75	117
D1106081	8.1	75	117
D1106082	8.2	75	117
D1106083	8.3	75	117
D1106084	8.4	75	117
D1106085	8.5	75	117
D1106086	8.6	81	125

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
D1106087	8.7	81	125
D1106088	8.8	81	125
D1106089	8.9	81	125
D1106090	9.0	81	125
D1106091	9.1	81	125
D1106092	9.2	81	125
D1106093	9.3	81	125
D1106094	9.4	81	125
D1106095	9.5	81	125
D1106096	9.6	87	133
D1106097	9.7	87	133
D1106098	9.8	87	133
D1106099	9.9	87	133
D1106100	10.0	87	133
D1106105	10.5	87	133
D1106110	11.0	94	142
D1106115	11.5	94	142
D1106120	12.0	101	151
D1106125	12.5	101	151
D1106130	13.0	101	151

◎ : Excellent ○ : Good

ISO	P											M					K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended																						

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials				Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	◎	◎	◎	◎																	

STRAIGHT SHANK DRILLS

DL510 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES

STUB
EXTRA KURZ
EXTRA-COURTE
EXTRA CORTA

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT
Forets HSS-E, queue cylindrique pour perçage profond, série extra-courte
PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP

▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.



DIN 1897 | HSS-E | 42° | h8 | 130° | P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL510020	2.0	12	38
DL510021	2.1	12	38
DL510022	2.2	13	40
DL510023	2.3	13	40
DL510024	2.4	14	43
DL510025	2.5	14	43
DL510026	2.6	14	43
DL510027	2.7	16	46
DL510028	2.8	16	46
DL510029	2.9	16	46
DL510030	3.0	16	46
DL510031	3.1	18	49
DL510032	3.2	18	49
DL510033	3.3	18	49
DL510034	3.4	20	52
DL510035	3.5	20	52
DL510036	3.6	20	52
DL510037	3.7	20	52
DL510038	3.8	22	55
DL510039	3.9	22	55
DL510040	4.0	22	55
DL510041	4.1	22	55
DL510042	4.2	22	55
DL510043	4.3	24	58
DL510044	4.4	24	58
DL510045	4.5	24	58

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL510046	4.6	24	58
DL510047	4.7	24	58
DL510048	4.8	26	62
DL510049	4.9	26	62
DL510050	5.0	26	62
DL510051	5.1	26	62
DL510052	5.2	26	62
DL510053	5.3	26	66
DL510054	5.4	28	66
DL510055	5.5	28	66
DL510056	5.6	28	66
DL510057	5.7	28	66
DL510058	5.8	28	66
DL510059	5.9	28	66
DL510060	6.0	28	66
DL510061	6.1	31	70
DL510062	6.2	31	70
DL510063	6.3	31	70
DL510064	6.4	31	70
DL510065	6.5	31	70
DL510066	6.6	31	70
DL510067	6.7	31	70
DL510068	6.8	34	74
DL510069	6.9	34	74
DL510070	7.0	34	74
DL510071	7.1	34	74

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M					K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel					Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○		

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials				Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended																					

STRAIGHT SHANK DRILLS

DL510 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES

STUB

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT — *EXTRA KURZ*

Forets HSS-E, queue cylindrique pour perçage profond, série extra-courte — *EXTRA-COURTE*

PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP — *EXTRA CORTA*

▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

DIN 1897 | HSS-E | 42° | h8 | 130° P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL510072	7.2	34	74
DL510073	7.3	34	74
DL510074	7.4	34	74
DL510075	7.5	34	74
DL510076	7.6	37	79
DL510077	7.7	37	79
DL510078	7.8	37	79
DL510079	7.9	37	79
DL510080	8.0	37	79
DL510081	8.1	37	79
DL510082	8.2	37	79
DL510083	8.3	37	79
DL510084	8.4	37	79
DL510085	8.5	37	79
DL510086	8.6	40	84
DL510087	8.7	40	84
DL510088	8.8	40	84
DL510089	8.9	40	84
DL510090	9.0	40	84
DL510091	9.1	40	84
DL510092	9.2	40	84
DL510093	9.3	40	84
DL510094	9.4	40	84
DL510095	9.5	40	84
DL510096	9.6	43	89
DL510097	9.7	43	89
DL510098	9.8	43	89

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL510099	9.9	43	89
DL510100	10.0	43	89
DL510102	10.2	43	89
DL510105	10.5	43	89
DL510108	10.8	47	95
DL510110	11.0	47	95
DL510112	11.2	47	95
DL510115	11.5	47	95
DL510118	11.8	47	95
DL510120	12.0	51	102
DL510125	12.5	51	102
DL510130	13.0	51	102
DL510135	13.5	54	107
DL510140	14.0	54	107
DL510145	14.5	56	111
DL510150	15.0	56	111
DL510155	15.5	58	115
DL510160	16.0	58	115
DL510165	16.5	60	119
DL510170	17.0	60	119
DL510175	17.5	62	123
DL510180	18.0	62	123
DL510185	18.5	64	127
DL510190	19.0	64	127
DL510195	19.5	66	131
DL510200	20.0	66	131

◎ : Excellent ○ : Good

ISO	P																			M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20								
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21								
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230								
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○								

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials				Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended																					

STRAIGHT SHANK DRILLS

DL508 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES

JOBBER

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT — *KURZ*

Forets HSS-E, queue cylindrique pour perçage profond, série courte — *COURTE*

PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP — *CORTA*

▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

DIN 338 | HSS-E | 42° | h8 | 130° P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL508020	2.0	24	49
DL508021	2.1	24	49
DL508022	2.2	27	53
DL508023	2.3	27	53
DL508024	2.4	30	57
DL508025	2.5	30	57
DL508026	2.6	30	57
DL508027	2.7	33	61
DL508028	2.8	33	61
DL508029	2.9	33	61
DL508030	3.0	33	61
DL508031	3.1	36	65
DL508032	3.2	36	65
DL508033	3.3	36	65
DL508034	3.4	39	70
DL508035	3.5	39	70
DL508036	3.6	39	70
DL508037	3.7	39	70
DL508038	3.8	43	75
DL508039	3.9	43	75
DL508040	4.0	43	75
DL508041	4.1	43	75
DL508042	4.2	43	75
DL508043	4.3	47	80
DL508044	4.4	47	80
DL508045	4.5	47	80

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL508046	4.6	47	80
DL508047	4.7	47	80
DL508048	4.8	52	86
DL508049	4.9	52	86
DL508050	5.0	52	86
DL508051	5.1	52	86
DL508052	5.2	52	86
DL508053	5.3	52	86
DL508054	5.4	57	93
DL508055	5.5	57	93
DL508056	5.6	57	93
DL508057	5.7	57	93
DL508058	5.8	57	93
DL508059	5.9	57	93
DL508060	6.0	57	93
DL508061	6.1	63	101
DL508062	6.2	63	101
DL508063	6.3	63	101
DL508064	6.4	63	101
DL508065	6.5	63	101
DL508066	6.6	63	101
DL508067	6.7	63	101
DL508068	6.8	69	109
DL508069	6.9	69	109
DL508070	7.0	69	109
DL508071	7.1	69	109

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron									
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20								
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21								
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230								
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○								

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)		Non Metallic Materials				Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended																					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

DL508 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES — *JOBBER*

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT — *KURZ*
Forets HSS-E, queue cylindrique pour perçage profond, série courte — *COURTE*
PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP — *CORTA*

▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

DIN 338 | HSS-E | 42° | h8 | 130° | P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL508072	7.2	69	109
DL508073	7.3	69	109
DL508074	7.4	69	109
DL508075	7.5	69	109
DL508076	7.6	75	117
DL508077	7.7	75	117
DL508078	7.8	75	117
DL508079	7.9	75	117
DL508080	8.0	75	117
DL508081	8.1	75	117
DL508082	8.2	75	117
DL508083	8.3	75	117
DL508084	8.4	75	117
DL508085	8.5	75	117
DL508086	8.6	81	125
DL508087	8.7	81	125
DL508088	8.8	81	125
DL508089	8.9	81	125
DL508090	9.0	81	125
DL508091	9.1	81	125
DL508092	9.2	81	125
DL508093	9.3	81	125

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL508094	9.4	81	125
DL508095	9.5	81	125
DL508096	9.6	87	133
DL508097	9.7	87	133
DL508098	9.8	87	133
DL508099	9.9	87	133
DL508100	10.0	87	133
DL508102	10.2	87	133
DL508105	10.5	87	133
DL508110	11.0	94	142
DL508112	11.2	94	142
DL508115	11.5	94	142
DL508120	12.0	101	151
DL508125	12.5	101	151
DL508130	13.0	101	151
DL508135	13.5	108	160
DL508140	14.0	108	160
DL508145	14.5	114	169
DL508150	15.0	114	169
DL508155	15.5	120	178
DL508160	16.0	120	178

◎ : Excellent ○ : Good

ISO	P																			M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel										Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20									
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21									
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230									
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
HB											15	30	25	38	34			55	60	42	55			
Recommended																								

STRAIGHT SHANK DRILLS

DL509 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES — *LONG*

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT — *LANG*
Forets HSS-E, queue cylindrique pour perçage profond, série longue — *LONGUE*
PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP — *LUNGA*

▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.



DIN 340 | HSS-E | 42° | h8 | 130° | P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL509020	2.0	56	85
DL509021	2.1	56	85
DL509022	2.2	59	90
DL509023	2.3	59	90
DL509024	2.4	62	95
DL509025	2.5	62	95
DL509026	2.6	62	95
DL509027	2.7	66	100
DL509028	2.8	66	100
DL509029	2.9	66	100
DL509030	3.0	66	100
DL509031	3.1	69	106
DL509032	3.2	69	106
DL509033	3.3	69	106
DL509034	3.4	73	112
DL509035	3.5	73	112
DL509036	3.6	73	112
DL509037	3.7	73	112
DL509038	3.8	78	119
DL509039	3.9	78	119
DL509040	4.0	78	119
DL509041	4.1	78	119
DL509042	4.2	78	119
DL509043	4.3	82	126
DL509044	4.4	82	126
DL509045	4.5	82	126

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL509046	4.6	82	126
DL509047	4.7	82	126
DL509048	4.8	87	132
DL509049	4.9	87	132
DL509050	5.0	87	132
DL509051	5.1	87	132
DL509052	5.2	87	132
DL509053	5.3	87	132
DL509054	5.4	91	139
DL509055	5.5	91	139
DL509056	5.6	91	139
DL509057	5.7	91	139
DL509058	5.8	91	139
DL509059	5.9	91	139
DL509060	6.0	91	139
DL509061	6.1	97	148
DL509062	6.2	97	148
DL509063	6.3	97	148
DL509064	6.4	97	148
DL509065	6.5	97	148
DL509066	6.6	97	148
DL509067	6.7	97	148
DL509068	6.8	102	156
DL509069	6.9	102	156
DL509070	7.0	102	156
DL509071	7.1	102	156

▶NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel										Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20									
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21									
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230									
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○									

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
HB											15	30	25	38	34			55	60	42	55			
Recommended																								

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

DL509 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES — *LONG*

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT — *LANG*
Forets HSS-E, queue cylindrique pour perçage profond, série longue — *LONGUE*
PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP — *LUNGA*

▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Tempergruß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

DIN 340 | HSS-E | 42° | h8 | 130° P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL509072	7.2	102	156
DL509073	7.3	102	156
DL509074	7.4	102	156
DL509075	7.5	102	156
DL509076	7.6	109	165
DL509077	7.7	109	165
DL509078	7.8	109	165
DL509079	7.9	109	165
DL509080	8.0	109	165
DL509081	8.1	109	165
DL509082	8.2	109	165
DL509083	8.3	109	165
DL509084	8.4	109	165
DL509085	8.5	109	165
DL509086	8.6	115	175
DL509087	8.7	115	175
DL509088	8.8	115	175
DL509089	8.9	115	175
DL509090	9.0	115	175
DL509091	9.1	115	175
DL509092	9.2	115	175
DL509093	9.3	115	175
DL509094	9.4	115	175
DL509095	9.5	115	175
DL509096	9.6	121	184
DL509097	9.7	121	184
DL509098	9.8	121	184
DL509099	9.9	121	184
DL509100	10.0	121	184
DL509102	10.2	121	184
DL509105	10.5	121	184
DL509110	11.0	128	195
DL509115	11.5	128	195
DL509120	12.0	134	205

◎ : Excellent ○ : Good

ISO	P																				M							K									
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel										Stainless steel							Grey cast iron				Nodular cast iron				Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20																		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21																		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																		
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○																		

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
HB											15	30	25	38	34			55	60	42	55			
Recommended																								

STRAIGHT SHANK DRILLS

DL505 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES — *JOBBER*

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT — *KURZ*
Forets HSS-E, queue cylindrique pour perçage profond, série courte — *COURTE*
PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP — *CORTA*

▶**Surface treatment** : Steam Tempered(Black Oxide Finish)
▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Tempergruß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

DIN 338 | HSS-E | 38° | h8 | 130° P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL505020	2.0	24	49
DL505021	2.1	24	49
DL505022	2.2	27	53
DL505023	2.3	27	53
DL505024	2.4	30	57
DL505025	2.5	30	57
DL505026	2.6	30	57
DL505027	2.7	33	61
DL505028	2.8	33	61
DL505029	2.9	33	61
DL505030	3.0	33	61
DL505031	3.1	36	65
DL505032	3.2	36	65
DL505033	3.3	36	65
DL505034	3.4	39	70
DL505035	3.5	39	70
DL505036	3.6	39	70
DL505037	3.7	39	70
DL505038	3.8	43	75
DL505039	3.9	43	75
DL505040	4.0	43	75
DL505041	4.1	43	75
DL505042	4.2	43	75
DL505043	4.3	47	80
DL505044	4.4	47	80
DL505045	4.5	47	80
DL505046	4.6	47	80
DL505047	4.7	47	80
DL505048	4.8	52	86
DL505049	4.9	52	86
DL505050	5.0	52	86
DL505051	5.1	52	86
DL505052	5.2	52	86
DL505053	5.3	52	86
DL505054	5.4	57	93
DL505055	5.5	57	93
DL505056	5.6	57	93
DL505057	5.7	57	93
DL505058	5.8	57	93
DL505059	5.9	57	93
DL505060	6.0	57	93
DL505061	6.1	63	101
DL505062	6.2	63	101
DL505063	6.3	63	101
DL505064	6.4	63	101
DL505065	6.5	63	101
DL505066	6.6	63	101
DL505067	6.7	63	101
DL505068	6.8	69	109
DL505069	6.9	69	109
DL505070	7.0	69	109
DL505071	7.1	69	109

▶ TiN(DN505), TiCN(DX505) and TiAlN(DT505) are available on your request.

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																				M							K									
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel										Stainless steel							Grey cast iron				Nodular cast iron				Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20																		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21																		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230																		
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○																		

ISO	N										S							H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41			
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550			
HB											15	30	25	38	34			55	60	42	55			
Recommended																								

STRAIGHT SHANK DRILLS

DL505 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES — *JOBBER*

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT — *KURZ*
Forets HSS-E, queue cylindrique pour perçage profond, série courte — *COURTE*
PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP — *CORTA*

▶**Surface treatment** : Steam Tempered(Black Oxide Finish)
▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

DIN 338 | HSS-E | 38° | h8 | 130° P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL505072	7.2	69	109
DL505073	7.3	69	109
DL505074	7.4	69	109
DL505075	7.5	69	109
DL505076	7.6	75	117
DL505077	7.7	75	117
DL505078	7.8	75	117
DL505079	7.9	75	117
DL505080	8.0	75	117
DL505081	8.1	75	117
DL505082	8.2	75	117
DL505083	8.3	75	117
DL505084	8.4	75	117
DL505085	8.5	75	117
DL505086	8.6	81	125
DL505087	8.7	81	125
DL505088	8.8	81	125
DL505089	8.9	81	125
DL505090	9.0	81	125
DL505091	9.1	81	125
DL505092	9.2	81	125

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL505093	9.3	81	125
DL505094	9.4	81	125
DL505095	9.5	81	125
DL505096	9.6	87	133
DL505097	9.7	87	133
DL505098	9.8	87	133
DL505099	9.9	87	133
DL505100	10.0	87	133
DL505101	10.1	87	133
DL505102	10.2	87	133
DL505105	10.5	87	133
DL505108	10.8	94	142
DL505110	11.0	94	142
DL505112	11.2	94	142
DL505115	11.5	94	142
DL505118	11.8	94	142
DL505120	12.0	101	151
DL505122	12.2	101	151
DL505125	12.5	101	151
DL505128	12.8	101	151
DL505130	13.0	101	151

▶ TiN(DN505), TiCN(DX505) and TiAlN(DT505) are available on your request.

◎ : Excellent ○ : Good

ISO	P																			M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended																					

STRAIGHT SHANK DRILLS

DL504 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES — *LONG*

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT — *LANG*
Forets HSS-E, queue cylindrique pour perçage profond, série longue — *LONGUE*
PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP — *LUNGA*

▶**Surface treatment** : Steam Tempered(Black Oxide Finish)
▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Oberflächenbehandlung** : Steam Homo(Schwarzoxidation)
▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl,Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.



DIN 340 | HSS-E | 38° | h8 | 130° P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL504052	5.2	87	132
DL504055	5.5	91	139
DL504058	5.8	91	139
DL504060	6.0	91	139
DL504062	6.2	97	148
DL504065	6.5	97	148
DL504068	6.8	102	156
DL504070	7.0	102	156
DL504072	7.2	102	156
DL504075	7.5	102	156
DL504078	7.8	109	165
DL504080	8.0	109	165
DL504082	8.2	109	165
DL504085	8.5	109	165
DL504090	9.0	115	175
DL504095	9.5	115	175
DL504098	9.8	121	184
DL504100	10.0	121	184
DL504105	10.5	121	184
DL504110	11.0	128	195
DL504115	11.5	128	195
DL504120	12.0	134	205
DL504125	12.5	134	205
DL504130	13.0	134	205

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL504052	5.2	87	132
DL504055	5.5	91	139
DL504058	5.8	91	139
DL504060	6.0	91	139
DL504062	6.2	97	148
DL504065	6.5	97	148
DL504068	6.8	102	156
DL504070	7.0	102	156
DL504072	7.2	102	156
DL504075	7.5	102	156
DL504078	7.8	109	165
DL504080	8.0	109	165
DL504082	8.2	109	165
DL504085	8.5	109	165
DL504090	9.0	115	175
DL504095	9.5	115	175
DL504098	9.8	121	184
DL504100	10.0	121	184
DL504105	10.5	121	184
DL504110	11.0	128	195
DL504115	11.5	128	195
DL504120	12.0	134	205
DL504125	12.5	134	205
DL504130	13.0	134	205

▶ TiN(DN504), TiCN(DX504) and TiAlN(DT504) are available on your request.

◎ : Excellent ○ : Good

ISO	P																			M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended																					

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

DT600 SERIES | DT692 SERIES | DT693 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for DEEP HOLES

EXTRA LONG

HSS-E, SPIRALBOHRER für TIEFLOCH mit ZYLINDERSCHAFT — ÜBERLANG
Forets HSS-E, queue cylindrique pour perçage profond, Forme C, série extra-longue — EXTRA-LONGUE
PUNTA IN HSS-E, GAMBO CILINDRICO PER FORI NON - STOP — EXTRA LUNGA

▶**Surface treatment** : TiAlN coating on working area.
▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

DIN 1869/1 | DIN 1869/2 | DIN 1869/3 | HSS-E | 38° | h8 | 130° P.282

▶DH100 worm pattern drills

Unit : mm

DT600 SERIES (DIN1869/1)

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DT600020	2.0	85	125
DT600025	2.5	95	140
DT600030	3.0	100	150
DT600035	3.5	115	165
DT600040	4.0	120	175
DT600045	4.5	125	185
DT600050	5.0	135	195
DT600055	5.5	140	205
DT600060	6.0	140	205
DT600065	6.5	150	215
DT600070	7.0	155	225
DT600075	7.5	155	225
DT600080	8.0	165	240
DT600085	8.5	165	240
DT600090	9.0	175	250
DT600095	9.5	175	250
DT600100	10.0	185	265
DT600105	10.5	185	265

▶ TiN(DN600) and TiCN(DX600) are available on your request.

DT692 SERIES (DIN1869/2)

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DT692030	3.0	130	190
DT692035	3.5	145	210
DT692040	4.0	150	220
DT692045	4.5	160	235
DT692050	5.0	170	245
DT692055	5.5	180	260
DT692060	6.0	180	260
DT692065	6.5	190	275
DT692070	7.0	200	290
DT692075	7.5	200	290
DT692080	8.0	210	305
DT692085	8.5	210	305
DT692090	9.0	220	320
DT692095	9.5	220	320
DT692100	10.0	235	340
DT692102	10.2	235	340

DT693 SERIES (DIN1869/3)

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DT693040	4.0	190	280
DT693050	5.0	210	315
DT693060	6.0	225	330
DT693080	8.0	265	390
DT693100	10.0	295	430

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○											

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
HB											15	30	25	38	34			55	60	42	55		
Recommended																							

STRAIGHT SHANK DRILLS

DL608 SERIES

HSS-E, MORSE TAPER SHANK TWIST DRILLS for DEEP HOLES

LONG

HSS-E, SPIRALBOHRER für TIEFLOCH mit MORSEKEGELSCHAFT — LANG
Forets HSS-E, queue cône morse pour perçage profond, série longue — LONGUE
PUNTE IN HSS - E, ATTACCO CONO MORSE PER FORI NON - STOP — LUNGA

▶**Application** : Drilling deep holes in non alloy steels, alloy steels, grey cast iron, malleable cast iron, special aluminum or magnesium alloys.

▶**Verwendung** : Zum Bohren von legiertem und unlegiertem stahl, Grauguß, Temperguß, Sphäroguß, Druckguß, Alu-Legierungen kurzspanend, Bronze, Messing zäh, Neusilber.

DIN 341 | HSS-E | 38° | 1~3 | h8 | 130° P.280-281

▶DH100 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	No.of Morse Taper
DL608130	13.0	134	215	1
DL608135	13.5	142	223	1
DL608140	14.0	142	223	1
DL608145	14.5	147	245	2
DL608150	15.0	147	245	2
DL608155	15.5	153	251	2
DL608160	16.0	153	251	2
DL608165	16.5	159	257	2
DL608170	17.0	159	257	2
DL608175	17.5	165	263	2
DL608180	18.0	165	263	2
DL608185	18.5	171	269	2
DL608190	19.0	171	269	2

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2	No.of Morse Taper
DL608195	19.5	177	275	2
DL608200	20.0	177	275	2
DL608210	21.0	184	282	2
DL608220	22.0	191	289	2
DL608230	23.0	198	296	2
DL608240	24.0	206	327	3
DL608250	25.0	206	327	3
DL608260	26.0	214	335	3
DL608270	27.0	222	343	3
DL608280	28.0	222	343	3
DL608290	29.0	230	351	3
DL608300	30.0	230	351	3

◎ : Excellent ○ : Good

ISO	P																			M					K						
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel and tool steel					Stainless steel					Grey cast iron			Nodular cast iron			Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20											
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21											
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230											
Recommended	◎	◎	◎	○		◎	○	○		○					○	○	○	○	○	○											

ISO	N										S							H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
HB											15	30	25	38	34			55	60	42	55		
Recommended																							

STRAIGHT SHANK DRILLS

DL507 SERIES

HSS-E, STRAIGHT SHANK TWIST DRILLS for ALUMINUM DEEP HOLES — EXTRA LONG

HSS-E, SPIRALBOHRER für ALUMINIUM TIEFLOCH mit ZYLINDERSCHAFT — ÜBERLANG
Forets HSS-E, queue cylindrique pour ALU, perçage profond, série extra-longue — EXTRA-LONGUE
PUNTE HSS-E, GAMBO CILINDRICO PER FORATURE NON - STOP SU ALLUMINIO — EXTRA LUNGA

▶**Application** : Drilling deep holes in aluminum and its alloys, silumin, zinc, refined copper, wood and other soft synthetic materials.

▶**Verwendung** : Zum Bohren von weichen und langspanenden Werkstoffen wie Alu-Legierungen, Zink, Kupfer, Kunstoffe und Holz.

HSS-E | 38° | h8 | 118° P.283

▶DH50 worm pattern drills

Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL507120	2.0	40	75
DL507121	2.1	40	75
DL507220	2.0	50	100
DL507221	2.1	50	100
DL507225	2.5	50	100
DL507227	2.7	50	100
DL507230	3.0	50	100
DL507233	3.3	50	100
DL507235	3.5	50	100
DL507320	2.0	75	150
DL507321	2.1	75	150
DL507325	2.5	75	150
DL507327	2.7	75	150
DL507330	3.0	75	150
DL507333	3.3	75	150
DL507335	3.5	75	150
DL507340	4.0	75	150
DL507342	4.2	75	150
DL507345	4.5	75	150
DL507350	5.0	75	150
DL507353	5.3	75	150
DL507355	5.5	75	150
DL507360	6.0	75	150

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL507430	3.0	100	200
DL507433	3.3	100	200
DL507435	3.5	100	200
DL507440	4.0	100	200
DL507442	4.2	100	200
DL507445	4.5	100	200
DL507450	5.0	100	200
DL507453	5.3	100	200
DL507455	5.5	100	200
DL507460	6.0	100	200
DL507465	6.5	100	200
DL507468	6.8	100	200
DL507470	7.0	100	200
DL507475	7.5	100	200
DL507480	8.0	100	200
DL507485	8.5	100	200
DL507488	8.8	100	200
DL507490	9.0	100	200
DL507495	9.5	100	200
DL507700	10.0	100	200
DL507540	4.0	150	250
DL507542	4.2	150	250
DL507545	4.5	150	250
DL507550	5.0	150	250
DL507553	5.3	150	250

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P																			M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel										Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20										
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230										
Recommended	○																													

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	◎	◎	○																		

STRAIGHT SHANK DRILLS
DL507 SERIES
HSS-E, STRAIGHT SHANK TWIST DRILLS for ALUMINUM DEEP HOLES — EXTRA LONG
HSS-E, SPIRALBOHRER für ALUMINIUM TIEFLOCH mit ZYLINDERSCHAFT — ÜBERLANG
Forets HSS-E, queue cylindrique pour ALU, perçage profond, série extra-longue — EXTRA-LONGUE
PUNTE HSS-E, GAMBO CILINDRICO PER FORATURE NON - STOP SU ALLUMINIO — EXTRA LUNGA
▶Application : Drilling deep holes in aluminum and its alloys, silumin, zinc, refined copper, wood and other soft synthetic materials.
▶Verwendung : Zum Bohren von weichen und langspanenden Werkstoffen wie Alu-Legierungen, Zink, Kupfer, Kunstoffe und Holz.

HSS-E | 38° | h8 | 118° P.283
▶DH50 worm pattern drills
Unit : mm

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL507555	5.5	150	250
DL507560	6.0	150	250
DL507565	6.5	150	250
DL507568	6.8	150	250
DL507570	7.0	150	250
DL507575	7.5	150	250
DL507580	8.0	150	250
DL507585	8.5	150	250
DL507588	8.8	150	250
DL507590	9.0	150	250
DL507595	9.5	150	250
DL507800	10.0	150	250
DL507803	10.3	150	250
DL507805	10.5	150	250
DL507810	11.0	150	250
DL507815	11.5	150	250
DL507820	12.0	150	250
DL507825	12.5	150	250
DL507830	13.0	150	250

EDP No.	Drill Diameter D1	Flute Length L1	Overall Length L2
DL507650	5.0	180	300
DL507653	5.3	180	300
DL507655	5.5	180	300
DL507660	6.0	180	300
DL507665	6.5	180	300
DL507668	6.8	180	300
DL507670	7.0	180	300
DL507675	7.5	180	300
DL507680	8.0	180	300
DL507685	8.5	180	300
DL507688	8.8	180	300
DL507690	9.0	180	300
DL507695	9.5	180	300
DL507900	10.0	180	300
DL507903	10.3	180	300
DL507905	10.5	180	300
DL507910	11.0	180	300
DL507915	11.5	180	300
DL507920	12.0	180	300
DL507925	12.5	180	300
DL507930	13.0	180	300

◎ : Excellent ○ : Good

ISO	P																			M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel and tool steel										Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20										
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230										
Recommended	○																													

ISO	N										S							H			
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed		Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials			Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
HB											15	30	25	38	34			55	60	42	55
Recommended	◎	◎	○																		

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

D2107, D1107, D2105, DL105, D1105, D1125, D2104, D1121, DL109 SERIES

HSS, HSS-E & HSSCo8 COBALT DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm) 2.0	3.0	4.0	6.0	8.0
P	1	Non-alloy steel	30	RPM	4770	3180	2390	1590	1190
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	2		25	RPM	3980	2650	1990	1330	990
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	3		20	RPM	3180	2120	1590	1060	800
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	4		20	RPM	3180	2120	1590	1060	800
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06
	5								
	6	Low alloy steel	25	RPM	3980	2650	1990	1330	990
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	7		20	RPM	3180	2120	1590	1060	800
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	8		20	RPM	3180	2120	1590	1060	800
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06
	9								
	10	High alloyed steel, and tool steel	15	RPM	2390	1590	1190	800	600
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	11								
M	12	Stainless steel	20	RPM	3180	2120	1590	1060	800
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	13		15	RPM	2390	1590	1190	800	600
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	14		10	RPM	1590	1060	800	530	400
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06
K	15	Grey cast iron	30	RPM	4770	3180	2390	1590	1190
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	16		25	RPM	3980	2650	1990	1330	990
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06
	17	Nodular cast iron	30	RPM	4770	3180	2390	1590	1190
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	18								
	19	Malleable cast iron	25	RPM	3980	2650	1990	1330	990
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	20								
N	21	Aluminum-wrought alloy	55	RPM	8750	5840	4380	2920	2190
				FEED	0.03~0.06	0.05~0.09	0.07~0.11	0.12~0.16	0.12~0.18
	22		55	RPM	8750	5840	4380	2920	2190
				FEED	0.03~0.06	0.05~0.09	0.07~0.11	0.12~0.16	0.12~0.18
	23	Aluminum-cast, alloyed	40	RPM	6370	4240	3180	2120	1590
				FEED	0.03~0.06	0.05~0.09	0.07~0.11	0.12~0.16	0.12~0.18
	24								
	25								
	26	Copper and Copper Alloys (Bronze / Brass)							
	27								
	28								
	29	Non Metallic Materials	20	RPM	3180	2120	1590	1060	800
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	30								
S	31	Heat Resistant Super Alloys							
	32								
	33								
	34								
	35								
	36	Titanium Alloys	10	RPM	1590	1060	800	530	400
				FEED	0.01~0.03	0.02~0.04	0.03~0.05	0.04~0.07	0.05~0.08
	37								
H	38	Hardened steel							
	39								
	40	Chilled Cast Iron							
	41	Hardened Cast Iron							

STRAIGHT SHANK DRILLS
RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

RPM = rev./min.
FEED = mm/rev.

VDI 3323	Parameter	Drill Diameter (mm) 10.0	13.0	16.0	18.0	20.0	30.0
1	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
2	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
3	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
4	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
5							
6	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
7	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
8	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
9							
10	RPM	480	370	300	270	240	160
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
11							
12	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
13	RPM	480	370	300	270	240	160
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
14	RPM	320	240	200	180	160	110
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
15	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
16	RPM	800	610	500	440	400	270
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
17	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
18							
19	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
20							
21	RPM	1750	1350	1090	970	880	580
	FEED	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38
22	RPM	1750	1350	1090	970	880	580
	FEED	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38
23	RPM	1270	980	800	710	640	420
	FEED	0.14~0.20	0.16~0.22	0.18~0.24	0.20~0.28	0.20~0.30	0.28~0.38
24							
25							
26							
27							
28							
29	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
30							
31							
32							
33							
34							
35							
36	RPM	320	240	200	180	160	110
	FEED	0.05~0.09	0.06~0.10	0.05~0.11	0.06~0.12	0.09~0.13	0.12~0.18
37							
38							
39							
40							
41							

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

D1100 SERIES — HSS, TWIST DRILLS for BRASS / BRONZE

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm) 2.0	3.0	4.0	5.0	6.0	8.0	10.0	13.0
P	1	Non-alloy steel										
	2											
	3											
	4											
	5											
	6	Low alloy steel										
	7											
	8											
	9											
	10	High alloyed steel, and tool steel										
	11											
M	12	Stainless steel										
	13											
	14											
K	15	Grey cast iron										
	16											
	17	Nodular cast iron										
	18											
	19	Malleable cast iron										
	20											
N	21	Aluminum-wrought alloy										
	22											
	23	Aluminum-cast, alloyed										
	24											
	25											
	26	Copper and Copper Alloys (Bronze / Brass)										
	27		45	RPM	7160	4770	3580	2860	2390	1790	1430	1100
				FEED	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.12~0.16	0.16~0.20	0.19~0.25	0.22~0.32
	28		30	RPM	4770	3180	2390	1910	1590	1190	950	730
				FEED	0.02~0.05	0.03~0.06	0.04~0.08	0.05~0.09	0.07~0.11	0.09~0.13	0.10~0.16	0.11~0.21
	29	Non Metallic Materials										
	30											
S	31	Heat Resistant Super Alloys										
	32											
	33											
	34											
	35											
	36	Titanium Alloys										
	37											
H	38	Hardened steel										
	39											
	40	Chilled Cast Iron										
	41	Hardened Cast Iron										

STRAIGHT SHANK DRILLS
RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

D1106 SERIES — HSS, TWIST DRILLS for ALUMINUM

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm) 2.0	3.0	4.0	5.0	6.0	8.0	10.0	13.0
P	1	Non-alloy steel										
	2											
	3											
	4											
	5											
	6	Low alloy steel										
	7											
	8											
	9											
	10	High alloyed steel, and tool steel										
	11											
M	12	Stainless steel										
	13											
	14											
K	15	Grey cast iron										
	16											
	17	Nodular cast iron										
	18											
	19	Malleable cast iron										
	20											
N	21	Aluminum-wrought alloy	50	RPM	7960	5310	3980	3180	2650	1990	1590	1220
				FEED	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.14~0.18	0.14~0.20	0.19~0.25	0.25~0.35
	22		50	RPM	7960	5310	3980	3180	2650	1990	1590	1220
				FEED	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.14~0.18	0.14~0.20	0.19~0.25	0.25~0.35
	23	Aluminum-cast, alloyed	40	RPM	6370	4240	3180	2550	2120	1590	1270	980
				FEED	0.05~0.08	0.06~0.10	0.08~0.12	0.10~0.14	0.14~0.18	0.14~0.20	0.19~0.25	0.25~0.35
	24		30	RPM	4770	3180	2390	1910	1590	1190	950	730
				FEED	0.03~0.06	0.03~0.07	0.04~0.08	0.05~0.09	0.04~0.10	0.06~0.12	0.10~0.16	0.12~0.22
	25											
	26	Copper and Copper Alloys (Bronze / Brass)										
	27											
	28											
	29	Non Metallic Materials										
	30											
S	31	Heat Resistant Super Alloys										
	32											
	33											
	34											
	35											
	36	Titanium Alloys										
	37											
H	38	Hardened steel										
	39											
	40	Chilled Cast Iron										
	41	Hardened Cast Iron										

STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

DL510, DL508, DL509, DL505, DL504, DL608 SERIES

HSS-E, DH100 WORM PATTERN DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm) 2.0	3.0	4.0	6.0	8.0
P	1	Non-alloy steel	30	RPM	4770	3180	2390	1590	1190
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	2		25	RPM	3980	2650	1990	1330	990
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	3		20	RPM	3180	2120	1590	1060	800
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	4		20	RPM	3180	2120	1590	1060	800
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06
	5								
	6	Low alloy steel	25	RPM	3980	2650	1990	1330	990
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	7		20	RPM	3180	2120	1590	1060	800
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	8		20	RPM	3180	2120	1590	1060	800
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06
	9								
	10	High alloyed steel, and tool steel	15	RPM	2390	1590	1190	800	600
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	11								
M	12	Stainless steel							
	13								
	14								
K	15	Grey cast iron	30	RPM	4770	3180	2390	1590	1190
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	16		25	RPM	3980	2650	1990	1330	990
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06
	17	Nodular cast iron	30	RPM	4770	3180	2390	1590	1190
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	18		20	RPM	3180	2120	1590	1060	800
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06
	19	Malleable cast iron	25	RPM	3980	2650	1990	1330	990
				FEED	0.02~0.04	0.03~0.05	0.04~0.06	0.05~0.08	0.10~0.13
	20		20	RPM	3180	2120	1590	1060	800
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06
N	21	Aluminum-wrought alloy							
	22								
	23	Aluminum-cast, alloyed							
	24								
	25								
	26	Copper and Copper Alloys (Bronze / Brass)							
	27								
	28								
	29	Non Metallic Materials							
	30								
S	31	Heat Resistant Super Alloys							
	32								
	33								
	34								
	35								
	36	Titanium Alloys							
	37								
H	38	Hardened steel							
	39								
	40	Chilled Cast Iron							
	41	Hardened Cast Iron							

STRAIGHT SHANK DRILLS
RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

RPM = rev./min.
FEED = mm/rev.

VDI 3323	Parameter	Drill Diameter (mm) 10.0	13.0	16.0	18.0	20.0	30.0
1	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
2	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
3	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
4	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
5							
6	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.2	0.19~0.25	0.22~0.28
7	RPM	640	490	400	350	320	210
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.2	0.19~0.25	0.22~0.28
8	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
9							
10	RPM	480	370	300	270	240	160
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
11							
12							
13							
14							
15	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
16	RPM	800	610	500	440	400	270
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
17	RPM	950	730	600	530	480	320
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
18	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
19	RPM	800	610	500	440	400	270
	FEED	0.11~0.15	0.11~0.17	0.12~0.18	0.14~0.20	0.19~0.25	0.22~0.28
20	RPM	640	490	400	350	320	210
	FEED	0.03~0.06	0.04~0.10	0.06~0.12	0.08~0.14	0.10~0.16	0.12~0.18
21							
22							
23							
24							
25							
26							
27							
28							
29							
30							
31							
32							
33							
34							
35							
36							
37							
38							
39							
40							
41							

CARBIDE
HSS
i-ONE DRILLS
i-DREAM DRILLS
DREAM DRILLS -GENERAL
DREAM DRILLS -HIGH FEED
DREAM DRILLS -FLAT BOTTOM
DREAM DRILLS -INOX
DREAM DRILLS -ALU
DREAM DRILLS -CFRP
DREAM DRILLS -MQL
DREAM DRILLS for HIGH HARDENED STEELS
GENERAL CARBIDE DRILLS
MULTI-1 DRILLS
HPD DRILLS
GOLD-P DRILLS
SUPER-GP DRILLS
STRAIGHT SHANK DRILLS
TAPER SHANK DRILLS
NC-SPOTTING DRILLS
CENTER DRILLS
SPADE DRILLS
REAMERS
COUNTER SINKS
COUNTER BORES
TECHNICAL DATA

STRAIGHT SHANK DRILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

DT600, DT692, DT693 SERIES — HSS-E, DH100 WORM PATTERN DRILLS (EXTRA LONG)

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm) 2.0	3.0	4.0	6.0	8.0	10.0	13.0
P	1	Non-alloy steel	20	RPM	3180	2120	1590	1060	800	640	490
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16
	2		15	RPM	2390	1590	1190	800	600	480	370
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16
	3		10	RPM	1590	1060	800	530	400	320	240
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16
	4		10	RPM	1590	1060	800	530	400	320	240
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10
	5										
	6	Low alloy steel	15	RPM	2390	1590	1190	800	600	480	370
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16
	7		10	RPM	1590	1060	800	530	400	320	240
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16
	8		10	RPM	1590	1060	800	530	400	320	240
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10
	9										
	10	High alloyed steel, and tool steel	5	RPM	800	530	400	270	200	160	120
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16
	11										
M	12	Stainless steel									
	13										
	14										
K	15	Grey cast iron	20	RPM	3180	2120	1590	1060	800	640	490
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16
	16		15	RPM	2390	1590	1190	800	600	480	370
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10
	17	Nodular cast iron	20	RPM	3180	2120	1590	1060	800	640	490
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16
	18		10	RPM	1590	1060	800	530	400	320	240
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10
	19	Malleable cast iron	15	RPM	2390	1590	1190	800	600	480	370
				FEED	0.01~0.03	0.03~0.05	0.04~0.06	0.05~0.08	0.08~0.11	0.09~0.13	0.10~0.16
	20		10	RPM	1590	1060	800	530	400	320	240
				FEED	0.01~0.02	0.01~0.03	0.02~0.04	0.02~0.05	0.03~0.06	0.03~0.06	0.04~0.10
N	21	Aluminum-wrought alloy									
	22										
	23	Aluminum-cast, alloyed									
	24										
	25										
	26	Copper and Copper Alloys (Bronze / Brass)									
	27										
	28										
	29	Non Metallic Materials									
	30										
S	31	Heat Resistant Super Alloys									
	32										
	33										
	34										
	35										
	36	Titanium Alloys									
	37										
H	38	Hardened steel									
	39										
	40	Chilled Cast Iron									
	41	Hardened Cast Iron									

STRAIGHT SHANK DRILLS
RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

DL507 SERIES — HSS-E, DH50 WORM PATTERN DRILLS

RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc (m/min)	Parameter	Drill Diameter (mm) 2.0	3.0	4.0	6.0	8.0	10.0	13.0
P	1	Non-alloy steel	15	RPM	2390	1590	1190	800	600	480	370
				FEED	0.01~0.03	0.02~0.04	0.03~0.06	0.04~0.08	0.04~0.10	0.07~0.13	0.09~0.15
	2										
	3										
	4										
	5										
	6	Low alloy steel									
	7										
	8										
	9										
	10	High alloyed steel, and tool steel									
	11										
M	12	Stainless steel									
	13										
	14										
K	15	Grey cast iron									
	16										
	17	Nodular cast iron									
	18										
	19	Malleable cast iron									
	20										
N	21	Aluminum-wrought alloy	55	RPM	8750	5840	4380	2920	2190	1750	1350
				FEED	0.02~0.04	0.03~0.06	0.04~0.08	0.08~0.12	0.10~0.16	0.14~0.20	0.16~0.26
	22		45	RPM	7160	4770	3580	2390	1790	1430	1100
				FEED	0.02~0.04	0.03~0.06	0.04~0.08	0.08~0.12	0.10~0.16	0.14~0.20	0.16~0.26
	23	Aluminum-cast, alloyed	40	RPM	6370	4240	3180	2120	1590	1270	980
				FEED	0.02~0.04	0.03~0.06	0.04~0.08	0.08~0.12	0.10~0.16	0.14~0.20	0.16~0.26
	24										
	25										
	26	Copper and Copper Alloys (Bronze / Brass)									
	27										
	28										
	29	Non Metallic Materials									
	30										
S	31	Heat Resistant Super Alloys									
	32										
	33										
	34										
	35										
	36	Titanium Alloys									
	37										
H	38	Hardened steel									
	39										
	40	Chilled Cast Iron									
	41	Hardened Cast Iron									