



Leading Through Innovation

CARBIDE, HSS & HSS-E

REAMERS

REIBAHLEN

- Carbide NC Machine Reamers
HSS Hand Reamers, HSS-E Chucking Reamers
- Hartmetall NC Maschinenreibahlen
HSS-Handreibahlen, HSS-E Spannfutter-Reibahlen

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
X

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES

SELECTION GUIDE



SERIES

HOLETYPE

FLUTETYPE

SIZE MIN

SIZE MAX

PAGE

K4101	K4111
Straight	LH Spiral
D2.0	D2.0
D20.0	D20.0
A366	A367

SURFACE TREATMENT

Bright

CARBIDE, HSS & HSS-E
REAMERS

Carbide NC Machine Reamers
HSS Hand Reamers
HSS-E Chucking Reamers



Please visit
globalyg1.com/mat
for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p.A387

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc		
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎
	2		About 0.45% C	Annealed	190	13	◎	◎
	3		About 0.45% C	Quenched & Tempered	250	25	◎	◎
	4		About 0.75% C	Annealed	270	28	○	○
	5		About 0.75% C	Quenched & Tempered	300	32	○	○
	6	Low alloy steel		Annealed	180	10	◎	◎
	7			Quenched & Tempered	275	29	◎	◎
	8			Quenched & Tempered	300	32	○	○
	9			Quenched & Tempered	350	38		
	10	High alloyed steel, and tool steel		Annealed	200	15	○	○
	11			Quenched & Tempered	325	35		
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	○	○
	13		Martensitic	Quenched & Tempered	240	23	○	○
	14		Austenitic		180	10	○	○
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎
	16		Pearlitic (Martensitic)		260	26	○	○
	17	Nodular cast iron	Ferritic		160	3	◎	◎
	18		Pearlitic		250	25	○	○
	19	Malleable cast iron	Ferritic		130		◎	◎
	20		Pearlitic		230	21	○	○
N	21	Aluminum-wrought alloy	Not Curable		60		○	○
	22		Curable	Hardened	100		○	○
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75		○	○
	24		≤ 12% Si, Curable	Hardened	90		○	○
	25		> 12% Si, Not Curable		130			
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110		○	○
	27	Non Metallic Materials	CuZn, CuSnZn (Brass)		90		○	○
	28		CuSn, lead-free copper and electrolytic copper		100		○	○
	29		Duroplastic, Fiber Reinforced Plastic					
	30		Rubber, Wood, etc.					
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15		
	32			Cured	280	30		
	33			Annealed	250	25		
	34		Ni or Co Based	Cured	350	38		
	35	Titanium Alloys		Cast	320	34		
	36		Pure Titanium		400 Rm			
	37		Alpha + Beta Alloys	Hardened	1050 Rm			
H	38	Hardened steel		Hardened	550	55		
	39			Hardened	630	60		
	40	Chilled Cast Iron		Cast	400	42		
	41	Hardened Cast Iron		Hardened	550	55		

A364

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG-1 CO., LTD.

K1143	K1153	K2101	K2111	K2121	K2102	K2112	K21B1
Straight	LH Spiral	Straight	LH Spiral	LH Spiral (Quick Spiral)	Straight	LH Spiral	LH Spiral
D2.0	D2.0	D2.0	D2.0	D4.0	D10.0	D10.0	D2.0
D60.0	D60.0	D20.0	D20.0	D20.0	D50.0	D50.0	D20.0
A368	A370	A372	A374	A376	A378	A379	A383

Bright

○	○	◎	◎	○	◎	◎	◎	1
○	○	◎	◎	○	◎	◎	◎	2
		○	○		○	○	○	3
		○	○		○	○	○	4
								5
○	○	◎	◎	○	◎	◎	◎	6 P
		○	○		○	○	○	7
								8
		○	○		○	○	○	9
								10
		○	○		○	○	○	11
		○	○		○	○	○	12
		○	○		○	○	○	13 M
		○	○		○	○	○	14
		○	○		○	○	○	15
		○	○		○	○	○	16
		○	○		○	○	○	17 K
		○	○		○	○	○	18
		○	○		○	○	○	19
		○	○		○	○	○	20
○	○	○	○	◎	○	○	○	21
○	○	○	○	◎	○	○	○	22
○	○	○	○	◎	○	○	○	23
○	○	○	○	◎	○	○	○	24
								25
○	○	○	○	◎	○	○	○	26 N
○	○	○	○	◎	○	○	○	27
○	○	○	○	◎	○	○	○	28
								29
								30
								31
								32
								33
								34 S
								35
								36
								37
								38
								39 H
								40
								41

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

A365

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
X

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES



CARBIDE, NC MACHINE REAMERS - STRAIGHT FLUTES

VHM, NC-MASCHINENREIBAHLEN - GERADEGENUTET
ALÉSOIRS CARBURE MACHINE CN - ENTRÉE DROITE
ALESATORI A MACCHINA IN MD - ELICA DRIITA

- Material - Up to Ø12.0 : Solid Carbide
- Over Ø12.0 : Carbide Head Brazed

► Straight Flutes, Right Hand Cut

► Unequal Flute Spacing

► O.D. Tolerances : DIN 1420 for H7

► Shank : DIN 6535-HA

► Chamfer Angle - D<3.0 : 15°
- D≥3.0 : 45°
- Material - bis Ø12,0 : VHM
- über Ø12,0 : gelötete VHM-Köpfe


► geradegenutet, rechtsschneidend

► Ungleichteilung

► Ø Toleranzen : DIN 1420 für H7

► Schaft : DIN 6535-HA

► Anschnittwinkel - bis Ø3,0 : 15°
- über Ø3,0 : 45°

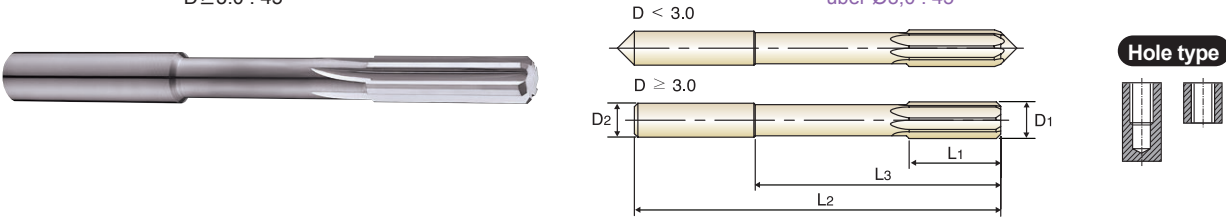

D<3.0 D≥3.0

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K410100200	2.0	4	11	20	50	4
K410100250	2.5	4	14	26	57	4
K410100300	3.0	4	15	31	61	6
K410100350	3.5	4	18	36	70	6
K410100400	4.0	4	19	42	75	6
K410100450	4.5	6	21	46	80	6
K410100500	5.0	6	23	51	86	6
K410100600	6.0	6	26	56	93	6
K410100650	6.5	8	28	62	101	6
K410100700	7.0	8	31	68	109	6
K410100750	7.5	8	31	68	109	6
K410100800	8.0	8	33	74	117	6
K410100850	8.5	10	33	74	117	6
K410100900	9.0	10	36	80	125	6
K410100950	9.5	10	36	80	125	6
K410101000	10.0	10	38	86	133	6
K410101050	10.5	12	38	86	133	6
K410101100	11.0	12	41	95	142	6
K410101200	12.0	12	44	104	151	6
K410101300	13.0	16	44	104	151	6
K410101400	14.0	16	47	108	160	8
K410101500	15.0	16	50	110	162	8
K410101600	16.0	16	52	118	170	8
K410101700	17.0	20	54	121	175	8
K410101800	18.0	20	56	128	182	8
K410101900	19.0	20	58	129	189	8
K410102000	20.0	20	60	135	195	8

◎ : Excellent ○ : Good

ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron		
	1	2	3	4	5	6	7	8	9		10	11	12	13	14	15	16	17	18	19	20
VDI 3323																					
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎	○	○	◎	◎	○	○	○	○	○	○	○	◎	○	◎	○	◎	○	○

ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
VDI 3323																						
HRC											15	30	25	38	34	36	37	55	60	42	55	
HB		60	100	75	90	130	110	90	100		200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○	○	○	○	○	○													



CARBIDE, NC MACHINE REAMERS - LH SPIRAL FLUTES

VHM, NC-MASCHINENREIBAHLEN - SPIRALGENUTET mit LINKSDRALL
ALÉSOIRS CARBURE MACHINE CN - HÉLICE À GAUCHE
ALESATORI A MACCHINA IN MD - ELICA SINISTRA

- Material - Up to Ø12.0 : Solid Carbide
- Over Ø12.0 : Carbide Head Brazed

► Left Spiral Flutes, Right Hand Cut

► Unequal Flute Spacing

► O.D. Tolerances : DIN 1420 for H7

► Shank : DIN 6535-HA

► Chamfer Angle - D<3.0 : 15°
- D≥3.0 : 45°
- Material - bis Ø12,0 : VHM
- über Ø12,0 : gelötete VHM-Köpfe


► linksspiralig, rechtsssschneidend

► Ungleichteilung

► Ø Toleranzen : DIN 1420 für H7

► Schaft : DIN 6535-HA

► Anschnittwinkel - bis Ø3,0 : 15°
- über Ø3,0 : 45°

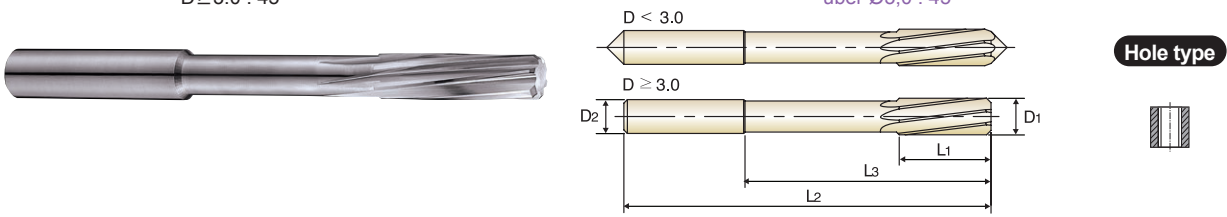

D<3.0 D≥3.0

Unit : mm

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K411100200	2.0	4	11	20	50	4
K411100250	2.5	4	14	26	57	4
K411100300	3.0	4	15	31	61	6
K411100350	3.5	4	18	36	70	6
K411100400	4.0	4	19	42	75	6
K411100450	4.5	6	21	46	80	6
K411100500	5.0	6	23	51	86	6
K411100550	5.5	6	26	56	93	6
K411100600	6.0	6	26	56	93	6
K411100650	6.5	8	28	62	101	6
K411100700	7.0	8	31	68	109	6
K411100750	7.5	8	31	68	109	6
K411100800	8.0	8	33	74	117	6
K411100900	9.0	10	36	80	125	6
K411100950	9.5	10	36	80	125	6
K411101000	10.0	10	38	86	133	6
K411101050	10.5	12	38	86	133	6
K411101100	11.0	12	41	95	142	6
K411101200	12.0	12	44	104	151	6
K411101400	14.0	16	47	108	160	8
K411101600	16.0	16	52	118	170	8
K411101700	17.0	20	54	121	175	8
K411101800	18.0	20	56	128	182	8
K411101900	19.0	20	58	129	189	8
K411102000	20.0	20	60	135	195	8

◎ : Excellent ○ : Good


ISO	P										M				K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel	Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommended	◎	◎	◎		○	◎	◎		○		○		○	○		◎	○	◎	○	◎	○

ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRC											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○		○	○	○														

HSS, HAND REAMERS - STRAIGHT FLUTES

🇧🇪 HSS, HANDREIBAHLEN - GERADEGENUTET
🇫🇷 ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE
🇮🇹 ALESATORI A MANO IN HSS - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
▶ Shank Diameter ≈ Nominal Reamer Diameter
▶ Straight Flutes / Right Hand Cut
▶ Chamfer Angle- tapered
▶ Type of center - Up to Ø3.75 : external centers
- Over Ø3.75 : internal centers
- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
▶ Schaft-Ø = Nomineller Reibahlen-Ø
▶ Geradegenutet / Rechtsschneidend
▶ Anschnittwinkel - Konisch
▶ Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen
- über Ø3,75 mm : Zentrierung

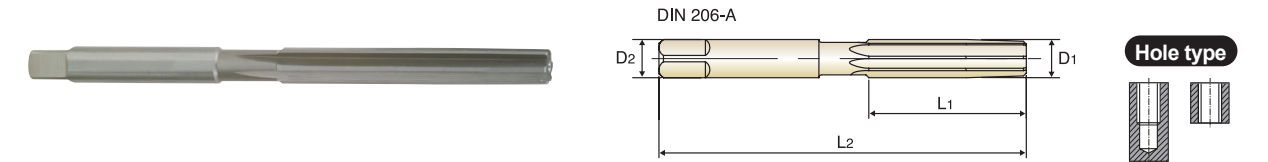

HSS DIN 206 H7 Bright

D1=D2

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K114300200	2.0	25	50	4
K114300220	2.2	27	54	4
K114300250	2.5	29	58	4
K114300280	2.8	31	62	4
K114300300	3.0	31	62	6
K114300350	3.5	35	71	6
K114300400	4.0	38	76	6
K114300450	4.5	41	81	6
K114300500	5.0	44	87	6
K114300550	5.5	47	93	6
K114300600	6.0	47	93	6
K114300700	7.0	54	107	6
K114300800	8.0	58	115	6
K114300900	9.0	62	124	6
K114301000	10.0	66	133	6
K114301100	11.0	71	142	6
K114301200	12.0	76	152	6
K114301400	14.0	81	163	8
K114301500	15.0	81	163	8
K114301600	16.0	87	175	8
K114301700	17.0	87	175	8
K114301800	18.0	93	188	8
K114301900	19.0	93	188	8
K114302000	20.0	100	201	8
K114302200	22.0	107	215	8
K114302400	24.0	115	231	8


▶ NEXT PAGE

ISO	P											M			K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	○	○				○																
ISO	N										S						H					
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	
HRc											15	30	25	38	34			55	60	42	55	
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550	
Recommended	○	○	○	○		○	○	○														

HSS, HAND REAMERS - STRAIGHT FLUTES

🇧🇪 HSS, HANDREIBAHLEN - GERADEGENUTET
🇫🇷 ALÉSOIRS HSS À MAIN - ENTRÉE DROITE
🇮🇹 ALESATORI A MANO IN HSS - ELICA DRITTA

- ▶ O.D. Tolerances : DIN 1420 for H7
▶ Shank Diameter ≈ Nominal Reamer Diameter
▶ Straight Flutes / Right Hand Cut
▶ Chamfer Angle- tapered
▶ Type of center - Up to Ø3.75 : external centers
- Over Ø3.75 : internal centers
- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
▶ Schaft-Ø = Nomineller Reibahlen-Ø
▶ Geradegenutet / Rechtsschneidend
▶ Anschnittwinkel - Konisch
▶ Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen
- über Ø3,75 mm : Zentrierung

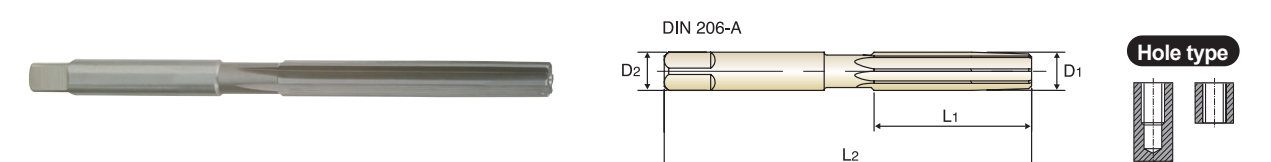

HSS DIN 206 H7 Bright

D1=D2

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K114302500	25.0	115	231	8
K114302600	26.0	115	231	8
K114302700	27.0	124	247	10
K114302800	28.0	124	247	10
K114303000	30.0	124	247	10
K114303100	31.0	133	265	10
K114303200	32.0	133	265	10
K114303300	33.0	133	265	10
K114303400	34.0	142	284	10
K114303500	35.0	142	284	10
K114303600	36.0	142	284	10
K114303700	37.0	142	284	10
K114303800	38.0	152	305	10
K114303810	38.1	152	305	10
K114303900	39.0	152	305	10
K114304000	40.0	152	305	10
K114304100	41.0	152	305	12
K114304200	42.0	152	305	12
K114304300	43.0	163	326	12
K114304400	44.0	163	326	12
K114304500	45.0	163	326	12
K114304600	46.0	163	326	12
K114304700	47.0	163	326	12
K114304800	48.0	174	347	12
K114304900	49.0	174	347	12
K114305200	52.0	174	347	12
K114306000	60.0	184	367	12

◎ : Excellent ○ : Good																					
ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommended	○	○				○															
ISO	N										S						H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron		
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550
Recommended	○	○	○	○		○	○	○													

HSS, HAND REAMERS - LH SPIRAL FLUTES

-  **HSS, HAND REAMERS - LH SPIRAL FLUTES**

 **ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE**

 **ALESATORI A MANO IN HSS - ELICA SINISTRA**
- O.D. Tolerances : DIN 1420, H7

► Shank Diameter ≙ Nominal Reamer Diameter

► LH Spiral Flutes / Right Hand Cut

► Chamfer Angle- tapered

► Type of center - Up to Ø3.75 : external centers

- Over Ø3.75 : internal centers

► Schneiden-Ø Toleranzen : DIN 1420 für H7

► Schaft-Ø = Nomineller Reibahlen-Ø

► Spiralgenutet mit Linksdrill / Rechtsschneidend

► Anschnittwinkel - Konisch

► Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen

- über Ø3,75 mm : Zentrierung

HSS, HAND REAMERS - LH SPIRAL FLUTES

-  **HSS, HAND REAMERS - LH SPIRAL FLUTES**

 **ALÉSOIRS HSS À MAIN - HÉLICE À GAUCHE**

 **ALESATORI A MANO IN HSS - ELICA SINISTRA**
- O.D. Tolerances : DIN 1420, H7

► Shank Diameter ≙ Nominal Reamer Diameter

► LH Spiral Flutes / Right Hand Cut

► Chamfer Angle- tapered

► Type of center - Up to Ø3.75 : external centers

- Over Ø3.75 : internal centers

► Schneiden-Ø Toleranzen : DIN 1420 für H7



► Schaft-Ø = Nomineller Reibahlen-Ø

► Geradegenutet / Rechtsschneidend

► Anschnittwinkel - Konisch

► Zentrierungsart - bis Ø3,75 mm : Zentrierungszapfen

- über Ø3,75 mm : Zentrierung

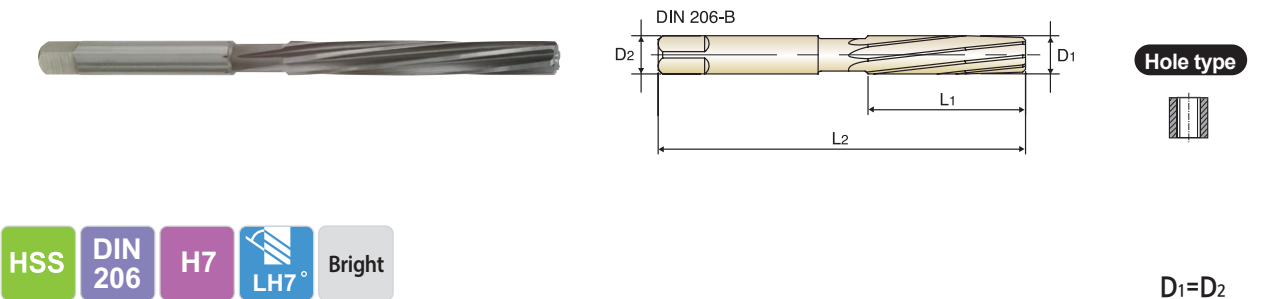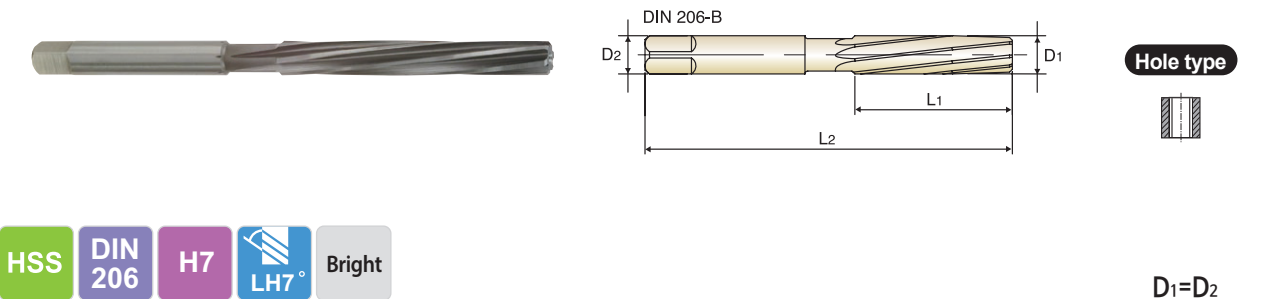

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K115300200	2.0	25	50	4
K115300220	2.2	27	54	4
K115300250	2.5	29	58	4
K115300280	2.8	31	62	4
K115300300	3.0	31	62	6
K115300320	3.2	33	66	6
K115300400	4.0	38	76	6
K115300500	5.0	44	87	6
K115300550	5.5	47	93	6
K115300600	6.0	47	93	6
K115300700	7.0	54	107	6
K115301200	12.0	76	152	6
K115301300	13.0	76	152	6
K115301400	14.0	81	163	8
K115301500	15.0	81	163	8
K115301600	16.0	87	175	8
K115301700	17.0	87	175	8
K115301800	18.0	93	188	8
K115301900	19.0	93	188	8
K115302000	20.0	100	201	8
K115302200	22.0	107	215	8
K115302400	24.0	115	231	8

EDP No.	Reamer Diameter	Flute Length	Overall Length	No. of Flute
	D	L1	L2	
K115302500	25.0	115	231	8
K115302600	26.0	115	231	8
K115302700	27.0	124	247	10
K115302800	28.0	124	247	10
K115302900	29.0	124	247	10
K115303000	30.0	124	247	10
K115303100	31.0	133	265	10
K115303200	32.0	133	265	10
K115303300	33.0	133	265	10
K115303400	34.0	142	284	10
K115303500	35.0	142	284	10
K115303810	38.1	152	305	10
K115303900	39.0	152	305	10
K115304100	41.0	152	305	12
K115304200	42.0	152	305	12
K115304300	43.0	163	326	12
K115304500	45.0	163	326	12
K115304600	46.0	163	326	12
K115304700	47.0	163	326	12
K115304800	48.0	174	347	12
K115304900	49.0	174	347	12
K115305200	52.0	174	347	12

ISO	P											M				K							
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230			
Recommended	○	○				○																	
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRC											15	30	25	38	34			55	60	42	55		
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	○	○	○	○		○	○	○															

ISO	P														M			K							
Material Description	Non-alloy steel					Low alloy steel					High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron			
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20					
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230					
Recommended	○	○				○																			
ISO	N										S						H								
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)				Non Metallic Materials		Heat Resistant Super Alloys				Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron			
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41				
HRC											15	30	25	38	34			55	60	42	55				
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550				
Recommended	○	○	○	○		○	○	○																	

HSS-E, STRAIGHT SHANK CHUCKING REAMERS - STRAIGHT FLUTES

● HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - GERADEGENUTET
● ALÉSOIRS HSS-E MACHINE DROIT- ENTRÉE DROITE
● ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA DRITTA

- ▶ O.D. Tolerances : DIN 1420 for H7

▶ Shank Diameter Tolerances : h8


▶ Straight Flute / Right Hand Cut

▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°
- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7

▶ Schaft-Ø Toleranzen : h8

▶ Geradenutet / Rechtsschneidend

▶ Anschnittwinkel - bis Ø3,75 mm : 15°
- über Ø3,75 mm : 45°

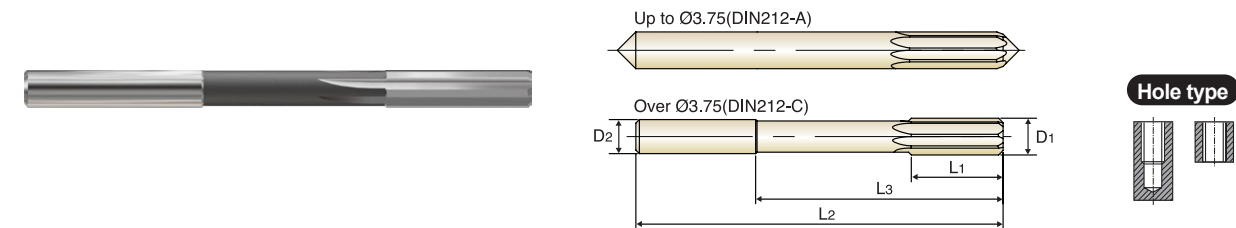

HSS-E DIN 212 H7 15° 45° Bright p.A388

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K210100950	9.5	9	36	80	125	6
K210101000	10.0	10	38	86	133	6
K210101050	10.5	10	38	86	133	6
K210101100	11.0	10	41	95	142	6
K210101200	12.0	10	44	104	151	6
K210101300	13.0	10	44	104	151	6
K210101400	14.0	12.5	47	108	160	8
K210101500	15.0	12.5	50	110	162	8
K210101600	16.0	12.5	52	118	170	8
K210101700	17.0	14	54	121	175	8
K210101800	18.0	14	56	128	182	8
K210102000	20.0	16	60	135	195	8

◎ : Excellent ○ : Good																							
ISO	P										M				K								
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron				
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20			
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21			
HB		125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommended	◎	◎	○	○		◎	○				○		○	○		○	○	○	○	○	○		
ISO	N										S						H						
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron		Hardened Cast Iron	
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41		
HRc											15	30	25	38	34			55	60	42	55		
HB		60	100	75	90	130	110	90	100		200	280	250	350	320	400Rm	1050Rm	550	630	400	550		
Recommended	○	○	○	○		○	○	○															

HSS-E, STRAIGHT SHANK CHUCKING REAMERS - STRAIGHT FLUTES

● HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - GERADEGENUTET
● ALÉSOIRS HSS-E MACHINE DROIT- ENTRÉE DROITE
● ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA DRITTA

- ▶ O.D. Tolerances : DIN 1420 for H7

▶ Shank Diameter Tolerances : h8


▶ Straight Flute / Right Hand Cut

▶ Chamfer Angle - Up to Ø3.75 : 15°
- Over Ø3.75 : 45°
- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7

▶ Schaft-Ø Toleranzen : h8

▶ Geradenutet / Rechtsschneidend

▶ Anschnittwinkel - bis Ø3,75 mm : 15°
- über Ø3,75 mm : 45°

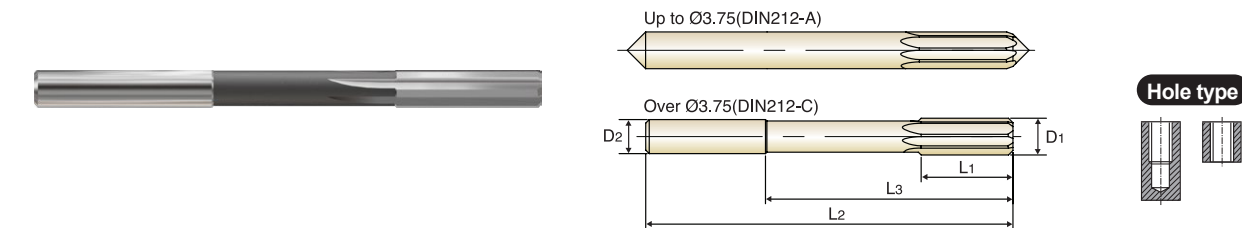

HSS-E DIN 212 H7 15° 45° Bright p.A388

EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K210100220	2.2	2.2	12	-	53	4
K210100250	2.5	2.5	14	-	57	4
K210100260	2.6	2.6	14	-	57	4
K210100280	2.8	2.8	15	-	61	4
K210100300	3.0	3	15	-	61	6
K210100320	3.2	3.2	16	-	65	6
K210100360	3.6	3.6	18	-	70	6
K210100370	3.7	3.7	18	-	70	6
K210100400	4.0	4	19	42	75	6
K210100430	4.3	4.5	21	46	80	6
K210100450	4.5	4.5	21	46	80	6
K210100460	4.6	4.5	21	46	80	6
K210100500	5.0	5	23	51	86	6
K210100550	5.5	5.6	26	56	93	6
K210100560	5.6	5.6	26	56	93	6
K210100600	6.0	5.6	26	56	93	6
K210100650	6.5	6.3	28	62	101	6
K210100700	7.0	7.1	31	68	109	6
K210100720	7.2	7.1	31	68	109	6
K210100800	8.0	8	33	74	117	6
K210100830	8.3	8	33	74	117	6
K210100850	8.5	8	33	74	117	6
K210100900	9.0	9	36	80	125	6

																						◎ : Excellent ○ : Good			
ISO	P										M				K										
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel				Grey cast iron		Nodular cast iron		Malleable cast iron					
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20					
HRC		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21					
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230					
Recommended	◎	◎	○	○		◎	○			○		○	○	○	○	○	○	○	○	○					
ISO	N										S										H				
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron				
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41				
HRC											15	30	25	38	34			55	60	42	55				
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400Rm	1050Rm	550	630	400	550				
Recommended	○	○	○	○		○	○	○																	




K2111 SERIES

HSS-E, STRAIGHT SHANK CHUCKING REAMERS - LH SPIRAL FLUTES

 **HSS-E, MASCHINENREIBAHLE mit ZYLINDERSCHAFT - SPIRALGENUTET mit LINKSDRALL**
 **ALÉSOIRS HSS-E MACHINE DROIT- HÉLICE À GAUCHE**
 **ALESATORI IN HSS-E, ATTACCO CILINDRICO - ELICA SINISTRA**

- | | |
|-------------------------------------|---|
| ▶ O.D. Tolerances : DIN 1420 for H7 | ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7 |
| ▶ Shank Diameter Tolerances : h8 | ▶ Schaft-Ø Toleranzen : h8 |
| ▶ LH Spiral Flutes / Right Hand Cut | ▶ Spiralgenutet mit Linksdrall / Rechtsschneidend |
| ▶ Chamfer Angle - Up to Ø3.75 : 15° | ▶ Ansnittwinkel - bis Ø3,75 mm : 15° |
| - Over Ø3.75 : 45° | - über Ø3,75 mm : 45° |

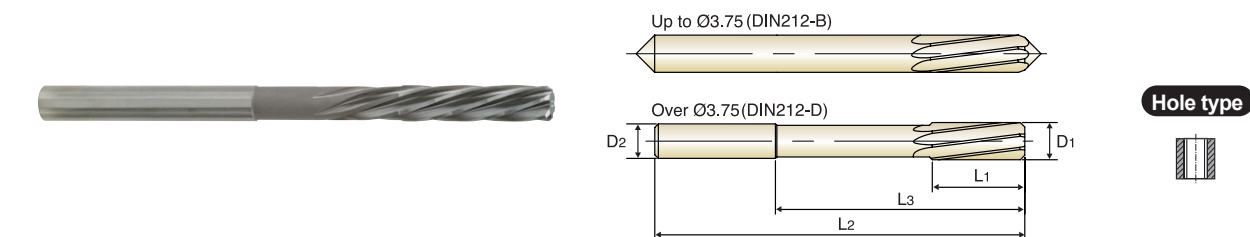

up to Ø3.75 over Ø3.75						Unit : mm
EDP No.	Reamer Diameter	Shank Diameter	Cutting Length	Neck Length	Overall Length	No. of Flute
	D1	D2	L1	L3	L2	
K211100850	8.5	8	33	74	117	6
K211100900	9.0	9	36	80	125	6
K211100950	9.5	9	36	80	125	6
K211101000	10.0	10	38	86	133	6
K211101050	10.5	10	38	86	133	6
K211101100	11.0	10	41	95	142	6
K211101300	13.0	10	44	104	151	6
K211101400	14.0	12.5	47	108	160	8
K211101500	15.0	12.5	50	110	162	8
K211101600	16.0	12.5	52	118	170	8
K211101700	17.0	14	54	121	175	8
K211101800	18.0	14	56	128	182	8
K211101900	19.0	16	58	129	189	8
K211102000	20.0	16	60	135	195	8

©: Excellent ○: Good

[illegible]

A375




K2102 SERIES

HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - STRAIGHT FLUTES

 **HSS-E, MASCHINENREIBAHLE mit MK - GERADEGENUTET**
 **ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - ENTRÉE DROITE**
 **ALESATORI IN HSS-E, ATTACCO CONICO - TAGLIENTI DRITTI**

- ▶ O.D. Tolerances : DIN 1420 for H7
 - ▶ Straight Flute / Right Hand Cut
 - ▶ Chamfer Angle : 45°
- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
 - ▶ Geradegenutet / Rechtsschneidend
 - ▶ Anschnittwinkel : 45°

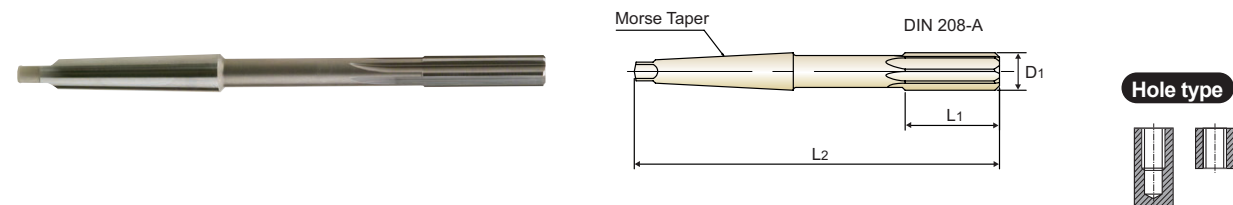

Unit : mm

EDP No.	Reamer Diameter	No. of Morse Taper	Cutting Length	Overall Length	No. of Flute
	D ₁		L ₁	L ₂	
K210201000	10.0	1	38	168	6
K210201100	11.0	1	41	175	6
K210201200	12.0	1	44	182	6
K210201300	13.0	1	44	182	6
K210201400	14.0	1	47	189	8
K210201500	15.0	2	50	204	8
K210201600	16.0	2	52	210	8
K210201700	17.0	2	54	214	8
K210201800	18.0	2	56	219	8
K210201900	19.0	2	58	223	8
K210202000	20.0	2	60	228	8
K210202100	21.0	2	62	232	8
K210202200	22.0	2	64	237	8
K210202300	23.0	2	66	241	8
K210202400	24.0	3	68	268	8
K210202500	25.0	3	68	268	8
K210202600	26.0	3	70	273	8
K210202700	27.0	3	71	277	10
K210202800	28.0	3	71	277	10
K210202900	29.0	3	73	281	10
K210203000	30.0	3	73	281	10
K210203100	31.0	3	75	285	10
K210203200	32.0	4	77	317	10
K210203400	34.0	4	78	321	10
K210203500	35.0	4	78	321	10
K210203600	36.0	4	79	325	10

▶ NEXT PAGE

◎: Excellent ○: Good

[illegible]

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

A377




K2102 SERIES

HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - STRAIGHT FLUTES

 **HSS-E, MASCHINENREIBAHLE mit MK - GERADEGENUTET**
 **ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - ENTRÉE DROITE**
 **ALESATORI IN HSS-E, ATTACCO CONICO - TAGLIENTI DRITTI**

- | | |
|-------------------------------------|--|
| ▶ O.D. Tolerances : DIN 1420 for H7 | ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7 |
| ▶ Straight Flute / Right Hand Cut | ▶ Geradegenutet / Rechtsschneidend |
| ▶ Chamfer Angle : 45° | ▶ Anschnittwinkel : 45° |

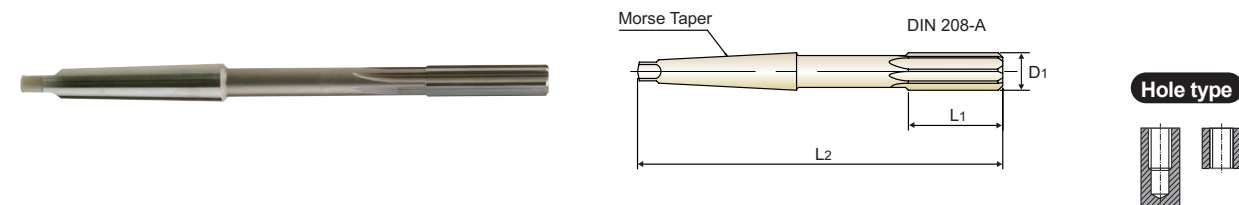

Unit : mm

EDP No.	Reamer Diameter	No. of Morse Taper	Cutting Length	Overall Length	No. of Flute
	D ₁		L ₁	L ₂	
K210204000	40.0	4	81	329	10
K210204100	41.0	4	82	333	12
K210204200	42.0	4	82	333	12
K210204300	43.0	4	83	336	12
K210204400	44.0	4	83	336	12
K210204500	45.0	4	83	336	12
K210204600	46.0	4	84	340	12
K210204700	47.0	4	84	340	12
K210204800	48.0	4	86	344	12
K210205000	50.0	4	86	344	12

◎ : Excellent ○ : Good

[illegible]

A378 phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

YG YG-1 CO., LTD.




K2112 SERIES

HSS-E, MORSE TAPER SHANK CHUCKING REAMERS - LH SPIRAL FLUTES

 HSS-E, MASCHINENREIBAHLE mit MK - SPIRALGENUTET mit LINKSDRALL
 ALÉSOIRS HSS-E MACHINE QUEUE CONIQUE - HÉLICE À GAUCHE
 ALESATORI IN HSS-E, ATTACCO CONICO - ELICA SINISTRA

- ▶ O.D. Tolerances : DIN 1420 for H7
 - ▶ LH Spiral Flutes / Right Hand Cut
 - ▶ Chamfer Angle : 45°
- ▶ Schneiden-Ø Toleranzen : DIN 1420 für H7
 - ▶ Spiralgenutet mit Linksdrall / Rechtsschneidend
 - ▶ Anschnittwinkel : 45°

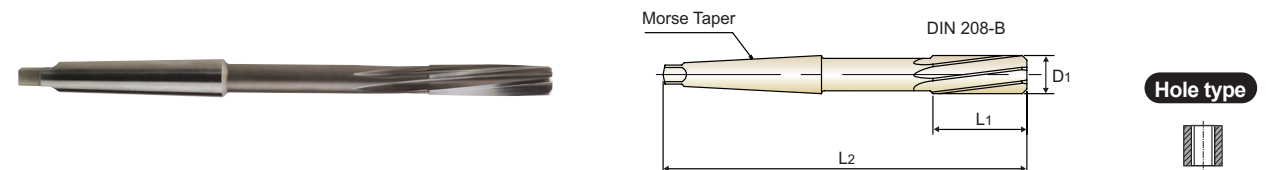

Unit : mm

EDP No.	Reamer Diameter	No. of Morse Taper	Cutting Length	Overall Length	No. of Flute
	D1		L1	L2	
K211201000	10.0	1	38	168	6
K211201100	11.0	1	41	175	6
K211201200	12.0	1	44	182	6
K211201300	13.0	1	44	182	6
K211201400	14.0	1	47	189	8
K211201500	15.0	2	50	204	8
K211201600	16.0	2	52	210	8
K211201700	17.0	2	54	214	8
K211201800	18.0	2	56	219	8
K211201900	19.0	2	58	223	8
K211202000	20.0	2	60	228	8
K211202100	21.0	2	62	232	8
K211202200	22.0	2	64	237	8
K211202300	23.0	2	66	241	8
K211202400	24.0	3	68	268	8
K211202500	25.0	3	68	268	8
K211202600	26.0	3	70	273	8
K211202700	27.0	3	71	277	10
K211202800	28.0	3	71	277	10
K211202900	29.0	3	73	281	10
K211203000	30.0	3	73	281	10
K211203100	31.0	3	75	285	10
K211203400	34.0	4	78	321	10
K211203500	35.0	4	78	321	10
K211203600	36.0	4	79	325	10

▶ NEXT PAGE

◎: Excellent ○: Good

[illegible]

YG-1 CO., LTD.

phone:+82-32-526-0909, www.yg1.solutions, E-mail:yg1@yg1.solutions

A379

CARBIDE

HSS

i-ONE
DRILLS

i-DREAM
DRILLS

DREAM
DRILLS
-PRO

DREAM
DRILLS
X

DREAM
DRILLS
-GENERAL

DREAM
DRILLS
-HIGH FEED

DREAM
DRILLS
-FLAT BOTTOM

DREAM
DRILLS
-INOX

DREAM
DRILLS
-ALU

DREAM
DRILLS
-MQL

DREAM DRILLS
for HIGH
HARDENED STEELS

GENERAL
CARBIDE
DRILLS

MULTI-1
DRILLS

HPD
DRILLS

GOLD-P
DRILLS

SUPER-GP
DRILLS

STRAIGHT
SHANK
DRILLS

TAPER SHANK
DRILLS

NC-
SPOTTING
DRILLS

CENTER
DRILLS

SPADE
DRILLS

REAMERS

COUNTER
SINKS

COUNTER
BORES



RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

K2101, K2111, K21B1,
K2102, K2112 SERIES

HSS-E, STRAIGHT & LH SPIRAL FLUTE
CHUCKING REAMERS
HSS-E, NC MACHINE REAMERS

Vc = m/min.
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Feed															
				2.0	4.0	6.0	8.0	10.0	12.0	14.0	16.0	20.0	24.0	28.0	32.0	36.0	40.0	45.0	50.0
P	1	Non-alloy steel	14	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	2		14	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	3		10	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	4		8	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	6	Low alloy steel	12	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	7		8	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	10	High alloyed steel, and tool steel	6	0.03-0.04	0.04-0.05	0.05-0.06	0.06-0.07	0.07-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20	0.20-0.22	0.22-0.24	0.24-0.26	0.26-0.28	0.28-0.30
M	12	Stainless steel	6	0.03-0.04	0.04-0.05	0.05-0.06	0.06-0.07	0.07-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20	0.20-0.22	0.22-0.24	0.24-0.26	0.26-0.28	0.28-0.30
	13		5	0.03-0.04	0.04-0.05	0.05-0.06	0.06-0.07	0.07-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20	0.20-0.22	0.22-0.24	0.24-0.26	0.26-0.28	0.28-0.30
	14		4	0.03-0.04	0.04-0.05	0.05-0.06	0.06-0.07	0.07-0.08	0.08-0.10	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.20	0.20-0.22	0.22-0.24	0.24-0.26	0.26-0.28	0.28-0.30
K	15	Grey cast iron	14	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	16		11	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	17	Nodular cast iron	12	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	18		10	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
	19	Malleable cast iron	12	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.14	0.14-0.17	0.17-0.20	0.20-0.23	0.23-0.26	0.26-0.29	0.29-0.32	0.32-0.35	0.35-0.38	0.38-0.41	0.41-0.44	0.44-0.47	0.47-0.50
	20		10	0.05-0.07	0.07-0.09	0.09-0.11	0.11-0.13	0.13-0.15	0.15-0.17	0.17-0.19	0.19-0.21	0.21-0.23	0.23-0.25	0.25-0.27	0.27-0.29	0.29-0.31	0.31-0.34	0.34-0.37	0.37-0.40
N	21	Aluminum-wrought alloy	18	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	22		18	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	23	Aluminum-cast, alloyed	18	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	24		17	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	26	Copper and Copper Alloys (Bronze / Brass)	18	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	27		16	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	28		20	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60
	28		20	0.10-0.13	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.31	0.31-0.34	0.34-0.37	0.37-0.40	0.40-0.43	0.43-0.46	0.46-0.49	0.49-0.52	0.52-0.56	0.56-0.60

K2121 SERIES

HSS-E, CHUCKING REAMERS - QUICK SPIRAL

Vc = m/min.
RPM = rev./min.
FEED = mm/rev.

ISO	VDI 3323	Material Description	Vc	Feed							
				2.0	4.0	8.0	10.0	12.0	14.0	16.0	20.0
P	1	Non-alloy steel	18	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	2		16	0.13-0.16	0.16-0.19	0.19-0.22	0.22-0.25	0.25-0.28	0.28-0.32	0.32-0.36	0.36-0.40
	6	Low alloy steel	14	0.10-0.12	0.12-0.14	0.14-0.16	0.16-0.18	0.18-0.21	0.21-0.24	0.24-0.27	0.27-0.30
N	21	Aluminum-wrought alloy	20	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	22		20	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	23	Aluminum-cast, alloyed	20	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	24		18	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	26	Copper and Copper Alloys (Bronze / Brass)	19	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	27		18	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60
	28		20	0.15-0.20	0.20-0.25	0.25-0.30	0.30-0.36	0.36-0.42	0.42-0.48	0.48-0.54	0.54-0.60



HSS & HSS Co8

COUNTERSINKS
SENKER

- For Deburring, Chamfering and Countersinking
- Zum Entgraten, Anfasen und Senken