Leading Through Innovation

SOLID CARBIDE

V7 PLUS END MILLS

V7 Plus VHM - Schaftfräser

- High Performance Carbide End Mills for Steels, Cast Iron and Stainless Steels

- Hochleistungs-VHM-Schaftfräser für Stähle, Gusseisen und rostfreie Stähle

SELECTION GUIDE

YG MILLING TOOLS

SOLID CARBIDE
V7 PLUS END MILLS

High performance carbide end mills
for Steels, Cast Iron and Stainless Steels

Please visit globalyg1.com/mat for material search

◎ : Excellent ○ : Good

Recommended cutting conditions : p. C482

SERIES	GMG55 GMG56	GMF54 GMF55	GMF58 GMF59
FLUTE	4	4	4
HELIX ANGLE	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)
CUTTING EDGE SHAPE	BALL NOSE	CORNER RADIUS	CORNER RADIUS
SIZE MIN	R1.5	D3.0	D3.0
SIZE MAX	R12.5	D20.0	D25.0
PAGE	C464	C465	C466
	LONG LENGTH	SHORT LENGTH	LONG LENGTH
	Y-Coating	Y-Coating	Y-Coating

ISO	VDI 3323	Material Description	Composition / Structure / Heat Treatment		HB	HRc			
P	1	Non-alloy steel	About 0.15% C	Annealed	125		◎	◎	◎
	2		About 0.45% C	Annealed	190	13	◎	◎	◎
	3		About 0.45% C	Quenched & Tempered	250	25	◎	◎	◎
	4		About 0.75% C	Annealed	270	28	◎	◎	◎
	5		About 0.75% C	Quenched & Tempered	300	32	◎	◎	◎
	6	Low alloy steel		Annealed	180	10	◎	◎	◎
	7			Quenched & Tempered	275	29	◎	◎	◎
	8			Quenched & Tempered	300	32	◎	◎	◎
	9			Quenched & Tempered	350	38	◎	◎	◎
	10	High alloyed steel, and tool steel		Annealed	200	15	◎	◎	◎
	11			Quenched & Tempered	325	35	◎	◎	◎
M	12	Stainless steel	Ferritic / Martensitic	Annealed	200	15	◎	◎	◎
	13		Martensitic	Quenched & Tempered	240	23	◎	◎	◎
	14		Austenitic		180	10	◎	◎	◎
K	15	Grey cast iron	Pearlitic / ferritic		180	10	◎	◎	◎
	16		Pearlitic (Martensitic)		260	26	◎	◎	◎
	17	Nodular cast iron	Ferritic		160	3	◎	◎	◎
	18		Pearlitic		250	25	◎	◎	◎
	19	Malleable cast iron	Ferritic		130		◎	◎	◎
	20		Pearlitic		230	21	◎	◎	◎
N	21	Aluminum-wrought alloy	Not Curable		60				
	22		Curable	Hardened	100				
	23	Aluminum-cast, alloyed	≤ 12% Si, Not Curable		75				
	24		≤ 12% Si, Curable	Hardened	90				
	25		> 12% Si, Not Curable		130				
	26	Copper and Copper Alloys (Bronze / Brass)	Cutting Alloys, PB>1%		110				
	27		CuZn, CuSnZn (Brass)		90				
	28		CuSn, lead-free copper and electrolytic copper		100				
	29	Non Metallic Materials	Duroplastic, Fiber Reinforced Plastic						
	30		Rubber, Wood, etc.						
S	31	Heat Resistant Super Alloys	Fe Based	Annealed	200	15	○	○	○
	32			Cured	280	30	○	○	○
	33		Ni or Co Based	Annealed	250	25	○	○	○
	34			Cured	350	38	○	○	○
	35			Cast	320	34	○	○	○
	36	Titanium Alloys	Pure Titanium		400 Rm		○	○	○
	37		Alpha + Beta Alloys	Hardened	1050 Rm		○	○	○
H	38	Hardened steel		Hardened	550	55			
	39			Hardened	630	60			
	40	Chilled Cast Iron		Cast	400	42			
	41	Hardened Cast Iron		Hardened	550	55			

CARBIDE
HSS
CBN END MILLS
i-Xmill END MILLS
i-SMART MODULAR END MILLS
X1-EH END MILLS
X5070 END MILLS
4G MILL END MILLS
X-POWER PRO END MILLS
TitaNox-POWER END MILLS
JET-POWER END MILLS
V7 PLUS END MILLS
ALU-POWER HPC END MILLS
ALU-POWER END MILLS
D-POWER GRAPHITE END MILLS
CRX S END MILLS
K-2 END MILLS
ONLY ONE COATED PM60 END MILLS
TANK POWER END MILLS
GENERAL HSS END MILLS
MILLING CUTTERS

SERIES	GMF62 GMF63	GMF52 GMF53	GMF56 GMF57	GMF60 GMF61	GMG16 GMG17	GMG18 GMG19	GMH58 GMH59	GMG12 GMG13	GMG14 GMG15	GMH56 GMH57	EMB72 EMB73
FLUTE	4	4	4	4	6	6	6	6	6	6	5
HELIX ANGLE	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	35°/37° (MULTIPLE HELIX)	45°	45°	45°	45°	45°	45°	41°~ 45°
CUTTING EDGE SHAPE	CORNER RADIUS	SQUARE	SQUARE	SQUARE	CORNER RADIUS	CORNER RADIUS	CORNER RADIUS	SQUARE	SQUARE	SQUARE	SQUARE
SIZE MIN	D3.0	D3.0	D3.0	D3.0	D6.0	D6.0	D6.0	D6.0	D6.0	D6.0	D6.0
SIZE MAX	D20.0	D20.0	D25.0	D20.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0	D25.0
PAGE	C467	C470	C471	C472	C474	C475	C477	C479	C479	C480	C481
	LONG LENGTH with NECK	SHORT LENGTH	LONG LENGTH	LONG LENGTH with NECK	LONG LENGTH	EXTRA LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH	EXTRA LONG LENGTH	EXTRA LONG LENGTH	LONG LENGTH
	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	Y-Coating	AlTiN
							CHIP SPLITTER			CHIP SPLITTER	V7 INOX

◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	1	P
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	2	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	3	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	4	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	5	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	6	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	7	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	8	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	9	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	10	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	11	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	12	M
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	13	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	14	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	15	K
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	16	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	17	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	18	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	19	
◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	○	20	
											21	N
											22	
											23	
											24	
											25	
											26	
											27	
											28	
											29	
											30	
○	○	○	○	○	○	○	○	○	○	○	31	S
○	○	○	○	○	○	○	○	○	○	○	32	
○	○	○	○	○	○	○	○	○	○	○	33	
○	○	○	○	○	○	○	○	○	○	○	34	
○	○	○	○	○	○	○	○	○	○	○	35	
○	○	○	○	○	○	○	○	○	○	◎	36	
○	○	○	○	○	○	○	○	○	○	◎	37	
											38	H
											39	
											40	
											41	

V7 PLUS END MILLS

PLAIN SHANK **GMG55** SERIES
FLAT SHANK **GMG56** SERIES

CARBIDE, 4 FLUTE BALL NOSE LONG LENGTH

VOLLHARTMETALL, 4 SCHNEIDEN STIRNRADIUS
CARBURE, 4 DENTS, HÉMISPHÉRIQUE
MD, 4 TAGLIENTI SEMISFERICA

- ▶Special flute geometry and multiple helix eliminate vibrations
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

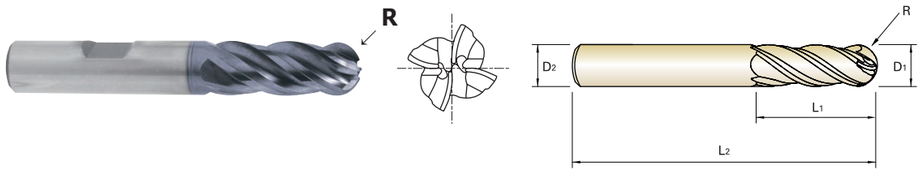

CARBIDE | 4 | 35°/37° | R ±0.02 | PLAIN | FLAT | Y Coating | p.C482

Unit : mm

EDP No.		Radius of Ball Nose	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
-	GMG56030	R1.5	3.0	6	8	57
GMG55040	GMG56040	R2.0	4.0	6	11	57
GMG55050	GMG56050	R2.5	5.0	6	13	57
GMG55060	GMG56060	R3.0	6.0	6	13	57
GMG55080	GMG56080	R4.0	8.0	8	19	63
GMG55100	GMG56100	R5.0	10.0	10	22	72
GMG55120	GMG56120	R6.0	12.0	12	26	83
GMG55160	GMG56160	R8.0	16.0	16	32	92
GMG55200	GMG56200	R10.0	20.0	20	38	104
-	GMG56250	R12.5	25.0	25	38	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMF54** SERIES
FLAT SHANK **GMF55** SERIES

CARBIDE, 4 FLUTE CORNER RADIUS SHORT LENGTH

VOLLHARTMETALL, 4 SCHNEIDEN ECKENRADIUS KURZ
CARBURE, 4 DENTS, SÉRIE COURTE, RAYONNÉE
MD, 4 TAGLIENTI SERIE CORTA TORICA

- ▶Special flute geometry and multiple helix eliminate vibrations
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

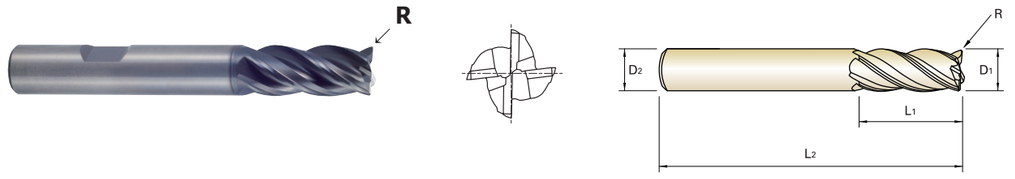

CARBIDE | 4 | 35°/37° | PLAIN | FLAT | Y Coating | p.C483

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMF54030	GMF55030	R0.3	3.0	6	7	54
GMF54901	GMF55901	R0.5	3.0	6	7	54
GMF54040	GMF55040	R0.3	4.0	6	8	54
GMF54902	GMF55902	R0.5	4.0	6	8	54
GMF54050	GMF55050	R0.3	5.0	6	10	54
GMF54903	GMF55903	R0.5	5.0	6	10	54
GMF54060	GMF55060	R0.3	6.0	6	10	54
GMF54904	GMF55904	R0.5	6.0	6	10	54
GMF54905	GMF55905	R1.0	6.0	6	10	54
-	GMF55080	R0.5	8.0	8	12	58
GMF54906	GMF55906	R1.0	8.0	8	12	58
GMF54100	GMF55100	R0.5	10.0	10	14	66
GMF54907	GMF55907	R1.0	10.0	10	14	66
GMF54120	GMF55120	R0.5	12.0	12	16	73
GMF54908	GMF55908	R1.0	12.0	12	16	73
GMF54909	GMF55909	R2.0	12.0	12	16	73
GMF54140	GMF55140	R0.5	14.0	14	18	75
GMF54160	GMF55160	R1.0	16.0	16	22	82
GMF54912	GMF55912	R2.0	16.0	16	22	82
GMF54913	GMF55913	R3.0	16.0	16	22	82
GMF54180	GMF55180	R1.0	18.0	18	24	84
GMF54200	GMF55200	R1.0	20.0	20	26	92
GMF54916	GMF55916	R2.0	20.0	20	26	92
GMF54917	GMF55917	R3.0	20.0	20	26	92

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMF58** SERIES
FLAT SHANK **GMF59** SERIES

CARBIDE, 4 FLUTE CORNER RADIUS LONG LENGTH

VOLLHARTMETALL, 4 SCHNEIDEN ECKENRADIUS LANG
CARBURE, 4 DENTS, SÉRIE LONGUE, RAYONNÉE
MD, 4 TAGLIENTI SERIE LUNGA TORICA

- ▶Special flute geometry and multiple helix eliminate vibrations
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

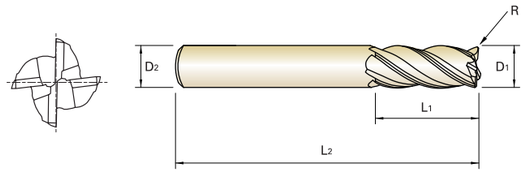

CARBIDE | 4 | 35°/37° | PLAIN | FLAT | Y Coating | p.C483

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMF58030	GMF59030	R0.3	3.0	6	8	57
GMF58901	GMF59901	R0.5	3.0	6	8	57
GMF58040	GMF59040	R0.3	4.0	6	11	57
GMF58902	GMF59902	R0.5	4.0	6	11	57
GMF58050	GMF59050	R0.3	5.0	6	13	57
GMF58903	GMF59903	R0.5	5.0	6	13	57
GMF58060	GMF59060	R0.3	6.0	6	13	57
GMF58904	GMF59904	R0.5	6.0	6	13	57
GMF58905	GMF59905	R1.0	6.0	6	13	57
GMF58080	GMF59080	R0.5	8.0	8	19	63
GMF58906	GMF59906	R1.0	8.0	8	19	63
GMF58100	GMF59100	R0.5	10.0	10	22	72
GMF58907	GMF59907	R1.0	10.0	10	22	72
GMF58120	GMF59120	R0.5	12.0	12	26	83
GMF58908	-	R1.0	12.0	12	26	83
GMF58909	GMF59909	R2.0	12.0	12	26	83
GMF58140	GMF59140	R0.5	14.0	14	26	83
GMF58160	GMF59160	R1.0	16.0	16	32	92
GMF58912	GMF59912	R2.0	16.0	16	32	92
GMF58913	GMF59913	R3.0	16.0	16	32	92
GMF58180	GMF59180	R1.0	18.0	18	32	92
GMF58200	GMF59200	R1.0	20.0	20	38	104
GMF58916	GMF59916	R2.0	20.0	20	38	104
GMF58917	GMF59917	R3.0	20.0	20	38	104
GMF58250	GMF59250	R1.0	25.0	25	38	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMF62** SERIES
FLAT SHANK **GMF63** SERIES

CARBIDE, 4 FLUTE CORNER RADIUS with EXTENDED NECK

VOLLHARTMETALL, 4 SCHNEIDEN ECKENRADIUS mit ABGESETZTEM HALS
CARBURE, 4 DENTS, DÉTALONNÉE, RAYONNÉE
MD, 4 TAGLIENTI CON SCARICO ESTESO TORICA

- ▶Special flute geometry and multiple helix eliminate vibrations
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

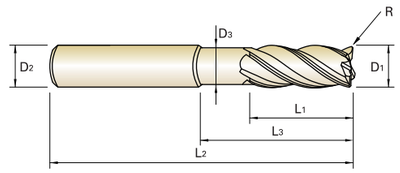

CARBIDE | 4 | 35°/37° | PLAIN | FLAT | Y Coating | p.C483

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
GMF62030	GMF63030	R0.3	3.0	6	7	12	54	2.7
-	GMF63901	R0.5	3.0	6	7	12	54	2.7
GMF62902	GMF63902	R0.3	3.0	6	7	17	57	2.7
GMF62903	GMF63903	R0.5	3.0	6	7	17	57	2.7
GMF62040	GMF63040	R0.3	4.0	6	8	15	57	3.7
GMF62904	GMF63904	R0.5	4.0	6	8	15	57	3.7
GMF62905	GMF63905	R0.3	4.0	6	8	22	63	3.7
GMF62906	GMF63906	R0.5	4.0	6	8	22	63	3.7
GMF62050	GMF63050	R0.3	5.0	6	10	17	57	4.7
GMF62907	GMF63907	R0.5	5.0	6	10	17	57	4.7
GMF62908	GMF63908	R0.3	5.0	6	10	27	67	4.7
GMF62909	GMF63909	R0.5	5.0	6	10	27	67	4.7
GMF62060	GMF63060	R0.3	6.0	6	10	15	57	5.5
GMF62910	GMF63910	R0.5	6.0	6	10	15	57	5.5
GMF62911	GMF63911	R1.0	6.0	6	10	15	57	5.5
GMF62912	GMF63912	R0.3	6.0	6	10	20	62	5.5
GMF62913	GMF63913	R0.5	6.0	6	10	20	62	5.5
GMF62914	GMF63914	R1.0	6.0	6	10	20	62	5.5
GMF62915	GMF63915	R0.3	6.0	6	10	32	74	5.5
-	GMF63916	R0.5	6.0	6	10	32	74	5.5
GMF62917	GMF63917	R1.0	6.0	6	10	32	74	5.5
GMF62080	GMF63080	R0.5	8.0	8	12	20	63	7.5
GMF62918	-	R1.0	8.0	8	12	20	63	7.5
GMF62919	GMF63919	R0.5	8.0	8	12	30	73	7.5

▶ NEXT PAGE

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMF62** SERIES
FLAT SHANK **GMF63** SERIES

CARBIDE, 4 FLUTE CORNER RADIUS with EXTENDED NECK

VOLLHARTMETALL, 4 SCHNEIDEN ECKENRADIUS mit ABGESETZTEM HALS
CARBURE, 4 DENTS, DÉTALONNÉE, RAYONNÉE
MD, 4 TAGLIENTI CON SCARICO ESTESO TORICA

- ▶Special flute geometry and multiple helix eliminate vibrations
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

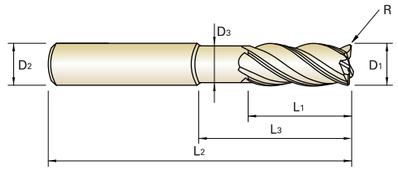

CARBIDE | 4 | 35°/37° | PLAIN | FLAT | Y Coating | p.C483

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
-	GMF63920	R1.0	**8.0**	8	12	30	73	7.5
GMF62921	GMF63921	R0.5	**8.0**	8	12	46	90	7.5
GMF62922	GMF63922	R1.0	**8.0**	8	12	46	90	7.5
GMF62100	-	R0.5	**10.0**	10	14	25	72	9.2
GMF62923	GMF63923	R1.0	**10.0**	10	14	25	72	9.2
GMF62924	GMF63924	R0.5	**10.0**	10	14	35	82	9.2
GMF62925	GMF63925	R1.0	**10.0**	10	14	35	82	9.2
GMF62926	GMF63926	R0.5	**10.0**	10	14	55	102	9.2
GMF62927	-	R1.0	**10.0**	10	14	55	102	9.2
GMF62120	GMF63120	R0.5	**12.0**	12	16	30	83	11.0
GMF62928	GMF63928	R1.0	**12.0**	12	16	30	83	11.0
GMF62929	GMF63929	R2.0	**12.0**	12	16	30	83	11.0
GMF62930	GMF63930	R0.5	**12.0**	12	16	40	93	11.0
GMF62931	GMF63931	R1.0	**12.0**	12	16	40	93	11.0
-	GMF63932	R2.0	**12.0**	12	16	40	93	11.0
GMF62935	-	R2.0	**12.0**	12	16	64	117	11.0
GMF62160	-	R1.0	**16.0**	16	22	38	92	15.0
GMF62936	GMF63936	R2.0	**16.0**	16	22	38	92	15.0
GMF62938	GMF63938	R1.0	**16.0**	16	22	55	109	15.0
GMF62939	-	R2.0	**16.0**	16	22	55	109	15.0
GMF62940	GMF63940	R3.0	**16.0**	16	22	55	109	15.0

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

▶ NEXT PAGE

◎ : Excellent ○ : Good

ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK GMF62 SERIES
FLAT SHANK GMF63 SERIES

CARBIDE, 4 FLUTE CORNER RADIUS with EXTENDED NECK

VOLLHARTMETALL, 4 SCHNEIDEN ECKENRADIUS mit ABGESETZTEM HALS
CARBURE, 4 DENTS, DÉTALONNÉE, RAYONNÉE
MD, 4 TAGLIENTI CON SCARICO ESTESO TORICA

- ▶Special flute geometry and multiple helix eliminate vibrations
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

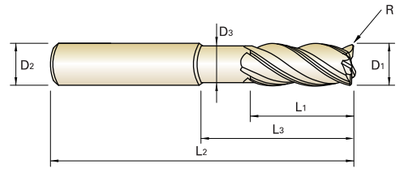

CARBIDE | 4 | 35°/37° | PLAIN | FLAT | Y Coating | p.C483

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter
PLAIN	FLAT	R	D1	D2	L1	L3	L2	D3
GMF62941	GMF63941	R1.0	**16.0**	16	22	87	141	15.0
GMF62942	GMF63942	R2.0	**16.0**	16	22	87	141	15.0
GMF62943	-	R3.0	**16.0**	16	22	87	141	15.0
GMF62200	GMF63200	R1.0	**20.0**	20	26	50	104	19.0
-	GMF63944	R2.0	**20.0**	20	26	50	104	19.0
GMF62945	-	R3.0	**20.0**	20	26	50	104	19.0
GMF62946	GMF63946	R1.0	**20.0**	20	26	70	124	19.0
GMF62947	GMF63947	R2.0	**20.0**	20	26	70	124	19.0
GMF62948	GMF63948	R3.0	**20.0**	20	26	70	124	19.0
GMF62949	GMF63949	R1.0	**20.0**	20	26	110	164	19.0
GMF62950	GMF63950	R2.0	**20.0**	20	26	110	164	19.0
GMF62951	GMF63951	R3.0	**20.0**	20	26	110	164	19.0

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P											M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron		
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMF52** SERIES
FLAT SHANK **GMF53** SERIES

CARBIDE, 4 FLUTE SHORT LENGTH

VOLLHARTMETALL, 4 SCHNEIDEN KURZ
CARBURE, 4 DENTS, SÉRIE COURTE
MD, 4 TAGLIENTI SERIE CORTA

▶Special flute geometry and multiple helix eliminate vibrations
▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40

▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

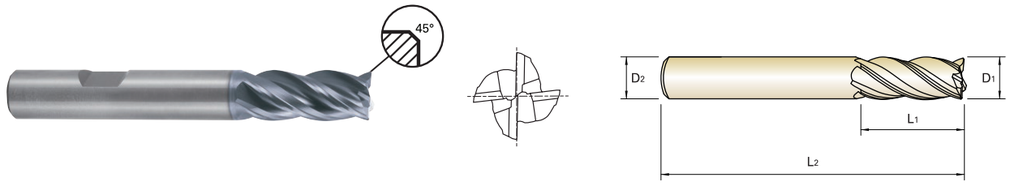

CARBIDE | 4 | 35°/37° | PLAIN | FLAT | C x 45° | Y Coating

p.C483

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
GMF52030	GMF53030	3.0	6	7	54	0.10
GMF52040	GMF53040	4.0	6	8	54	0.15
GMF52050	GMF53050	5.0	6	10	54	0.15
GMF52060	-	6.0	6	10	54	0.20
GMF52080	GMF53080	8.0	8	12	58	0.20
GMF52100	GMF53100	10.0	10	14	66	0.30
GMF52120	GMF53120	12.0	12	16	73	0.35
GMF52140	GMF53140	14.0	14	18	75	0.40
GMF52160	GMF53160	16.0	16	22	82	0.40
-	GMF53180	18.0	18	24	84	0.50
GMF52200	GMF53200	20.0	20	26	92	0.50

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P													M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMF56** SERIES
FLAT SHANK **GMF57** SERIES

CARBIDE, 4 FLUTE LONG LENGTH

VOLLHARTMETALL, 4 SCHNEIDEN LANG
CARBURE, 4 DENTS, SÉRIE LONGUE
MD, 4 TAGLIENTI SERIE LUNGA

▶Special flute geometry and multiple helix eliminate vibrations
▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40

▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

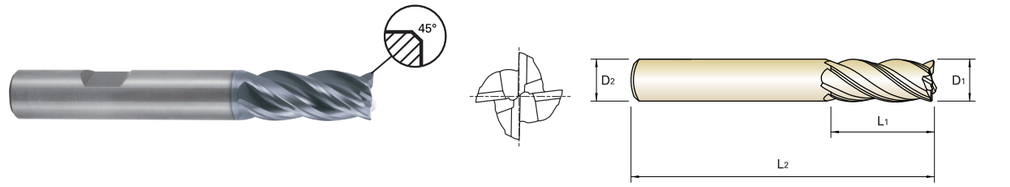

CARBIDE | 4 | 35°/37° | PLAIN | FLAT | C x 45° | Y Coating

p.C483

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT	D1	D2	L1	L2	
GMF56030	GMF57030	3.0	6	8	57	0.10
GMF56040	GMF57040	4.0	6	11	57	0.15
GMF56050	GMF57050	5.0	6	13	57	0.15
GMF56060	GMF57060	6.0	6	13	57	0.20
GMF56080	GMF57080	8.0	8	19	63	0.20
GMF56100	GMF57100	10.0	10	22	72	0.30
GMF56120	GMF57120	12.0	12	26	83	0.35
GMF56140	GMF57140	14.0	14	26	83	0.40
GMF56160	GMF57160	16.0	16	32	92	0.40
GMF56180	GMF57180	18.0	18	32	92	0.50
GMF56200	GMF57200	20.0	20	38	104	0.50
GMF56250	GMF57250	25.0	25	38	104	0.50

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P													M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel				Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20		
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21		
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230		
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎		

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMF60 SERIES**
FLAT SHANK **GMF61 SERIES**

CARBIDE, 4 FLUTE with EXTENDED NECK

VOLLHARTMETALL, 4 SCHNEIDEN mit ABGESETZTEM HALS
CARBURE, 4 DENTS, DÉTALONNÉE
MD, 4 TAGLIENTI CON SCARICO ESTESO

- ▶Special flute geometry and multiple helix eliminate vibrations
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

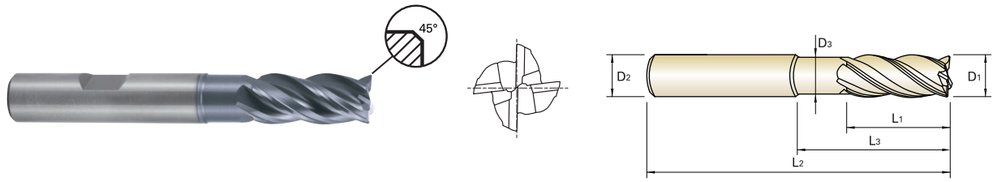

CARBIDE | 4 | 35°/37° | PLAIN | FLAT | C x 45° | Y Coating | p.C483

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Chamfer
PLAIN	FLAT	D1	D2	L1	L3	L2	D3	
GMF60030	GMF61030	3.0	6	7	12	54	2.7	0.10
GMF60901	GMF61901	3.0	6	7	17	57	2.7	0.10
GMF60902	GMF61902	3.0	6	8	14	57	2.7	0.10
GMF60040	GMF61040	4.0	6	8	15	57	3.7	0.15
GMF60903	GMF61903	4.0	6	8	22	63	3.7	0.15
GMF60904	GMF61904	4.0	6	11	16	57	3.7	0.15
GMF60050	GMF61050	5.0	6	10	17	57	4.7	0.15
GMF60905	GMF61905	5.0	6	10	27	67	4.7	0.15
GMF60906	GMF61906	5.0	6	13	18	57	4.7	0.15
GMF60060	GMF61060	6.0	6	10	15	57	5.5	0.20
GMF60907	GMF61907	6.0	6	10	20	62	5.5	0.20
GMF60908	GMF61908	6.0	6	10	32	74	5.5	0.20
GMF60909	GMF61909	6.0	6	13	21	57	5.5	0.20
GMF60080	GMF61080	8.0	8	12	20	63	7.5	0.20
GMF60910	GMF61910	8.0	8	12	30	73	7.5	0.20
GMF60911	GMF61911	8.0	8	12	46	90	7.5	0.20
GMF60912	GMF61912	8.0	8	19	27	63	7.5	0.20
GMF60100	GMF61100	10.0	10	14	25	72	9.2	0.30
GMF60913	GMF61913	10.0	10	14	35	82	9.2	0.30
GMF60914	GMF61914	10.0	10	14	55	102	9.2	0.30
GMF60915	GMF61915	10.0	10	22	32	72	9.2	0.30

▶ NEXT PAGE

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

CARBIDE
HSS
CBN END MILLS
i-Xmill END MILLS
i-SMART MODULAR END MILLS
X1-EH END MILLS
X5070 END MILLS
4G MILL END MILLS
X-POWER PRO END MILLS
TitaNox-POWER END MILLS
JET-POWER END MILLS
V7 PLUS END MILLS
ALU-POWER HPC END MILLS
D-POWER GRAPHITE END MILLS
CRX S END MILLS
K-2 END MILLS
ONLY ONE COATED PM60 END MILLS
TANK POWER END MILLS
GENERAL HSS END MILLS
MILLING CUTTERS

V7 PLUS END MILLS

PLAIN SHANK **GMF60 SERIES**
FLAT SHANK **GMF61 SERIES**

CARBIDE, 4 FLUTE with EXTENDED NECK

VOLLHARTMETALL, 4 SCHNEIDEN mit ABGESETZTEM HALS
CARBURE, 4 DENTS, DÉTALONNÉE
MD, 4 TAGLIENTI CON SCARICO ESTESO

- ▶Special flute geometry and multiple helix eliminate vibrations
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40
- ▶Die spezielle Schneidengeometrie und der ungleiche Drall verhindern Vibrationen
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

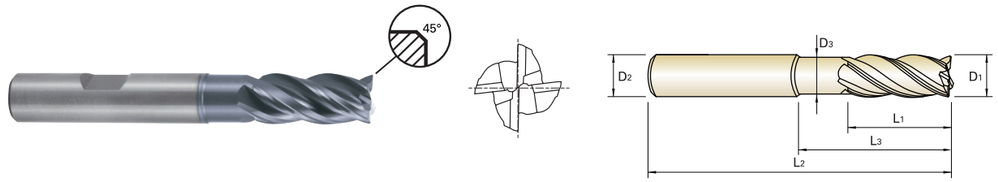

CARBIDE | 4 | 35°/37° | PLAIN | FLAT | C x 45° | Y Coating | p.C483

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Length Below Shank	Overall Length	Neck Diameter	Chamfer
PLAIN	FLAT	D1	D2	L1	L3	L2	D3	
GMF60120	GMF61120	12.0	12	16	30	83	11.0	0.35
GMF60916	GMF61916	12.0	12	16	40	93	11.0	0.35
GMF60917	GMF61917	12.0	12	16	64	117	11.0	0.35
GMF60918	GMF61918	12.0	12	26	38	83	11.0	0.35
GMF60160	GMF61160	16.0	16	22	38	92	15.0	0.40
GMF60919	GMF61919	16.0	16	22	55	109	15.0	0.40
GMF60920	GMF61920	16.0	16	22	87	141	15.0	0.40
GMF60921	GMF61921	16.0	16	32	44	92	15.0	0.40
GMF60200	GMF61200	20.0	20	26	50	104	19.0	0.50
GMF60922	GMF61922	20.0	20	26	70	124	19.0	0.50
GMF60923	GMF61923	20.0	20	26	110	164	19.0	0.50
GMF60924	GMF61924	20.0	20	38	54	104	19.0	0.50

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P												M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel			Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21	
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230	
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMG16** SERIES
FLAT SHANK **GMG17** SERIES

CARBIDE, 6 FLUTE CORNER RADIUS LONG LENGTH

VOLLHARTMETALL, 6 SCHNEIDEN ECKENRADIUS LANG
CARBURE, 6 DENTS, SÉRIE LONGUE, RAYONNÉE
MD, 6 TAGLIENTI SERIE LUNGA TORICA

▶The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40

▶Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochiodales Fräsen.
▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

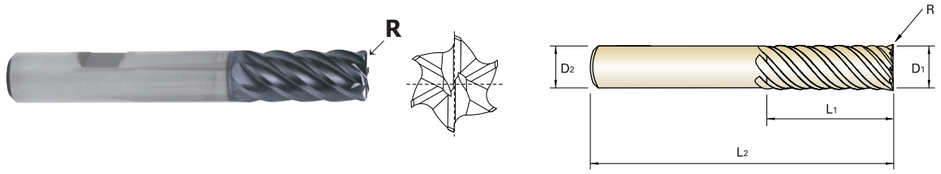

CARBIDE | 6 | 45° | PLAIN | FLAT | Y Coating | p.C484

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG16060	**GMG17060**	R0.5	**6.0**	6	13	57
GMG16901	**GMG17901**	R1.0	**6.0**	6	13	57
GMG16080	**GMG17080**	R0.5	**8.0**	8	19	63
GMG16902	**GMG17902**	R1.0	**8.0**	8	19	63
GMG16100	**GMG17100**	R0.5	**10.0**	10	22	72
GMG16903	**GMG17903**	R1.0	**10.0**	10	22	72
GMG16904	**GMG17904**	R1.5	**10.0**	10	22	72
GMG16905	**GMG17905**	R2.0	**10.0**	10	22	72
GMG16120	**GMG17120**	R0.5	**12.0**	12	26	83
GMG16906	**GMG17906**	R1.0	**12.0**	12	26	83
GMG16907	**GMG17907**	R1.5	**12.0**	12	26	83
GMG16908	**GMG17908**	R2.0	**12.0**	12	26	83
GMG16909	**GMG17909**	R3.0	**12.0**	12	26	83
GMG16160	**GMG17160**	R1.0	**16.0**	16	32	92
-	**GMG17910**	R1.5	**16.0**	16	32	92
GMG16911	**GMG17911**	R2.0	**16.0**	16	32	92
GMG16912	**GMG17912**	R3.0	**16.0**	16	32	92
GMG16200	**GMG17200**	R1.0	**20.0**	20	38	104
GMG16913	**GMG17913**	R1.5	**20.0**	20	38	104
GMG16914	**GMG17914**	R2.0	**20.0**	20	38	104
GMG16915	**GMG17915**	R3.0	**20.0**	20	38	104
GMG16250	**GMG17250**	R1.0	**25.0**	25	44	104
GMG16916	**GMG17916**	R1.5	**25.0**	25	44	104
GMG16917	**GMG17917**	R2.0	**25.0**	25	44	104
GMG16918	**GMG17918**	R3.0	**25.0**	25	44	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5
Over Ø12	0 ~ - 0.03	* Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P																			M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel										Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20										
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230										
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎										

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMG18** SERIES
FLAT SHANK **GMG19** SERIES

CARBIDE, 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH

VOLLHARTMETALL, 6 SCHNEIDEN ECKENRADIUS EXTRA LANG
CARBURE, 6 DENTS, SÉRIE EXTRA-LONGUE, RAYONNÉE
MD, 6 TAGLIENTI SERIE EXTRA LUNGA TORICA

▶The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40

▶Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochiodales Fräsen.
▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

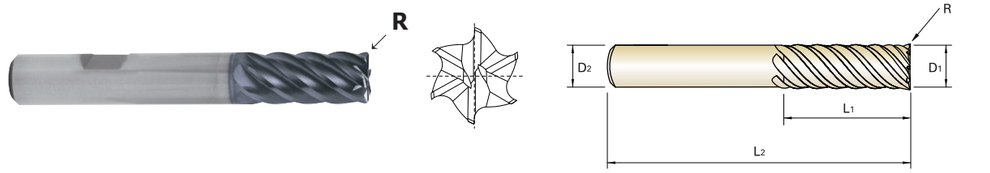

CARBIDE | 6 | 45° | PLAIN | FLAT | Y Coating | p.C484

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG18060	**GMG19060**	R0.5	**6.0**	6	24	75
-	**GMG19901**	R1.0	**6.0**	6	24	75
GMG18080	-	R0.5	**8.0**	8	32	75
-	**GMG19902**	R1.0	**8.0**	8	32	75
GMG18903	**GMG19903**	R2.0	**8.0**	8	32	75
GMG18100	**GMG19100**	R0.5	**10.0**	10	40	100
GMG18904	**GMG19904**	R1.0	**10.0**	10	40	100
GMG18905	**GMG19905**	R1.5	**10.0**	10	40	100
GMG18906	**GMG19906**	R2.0	**10.0**	10	40	100
GMG18120	**GMG19120**	R0.5	**12.0**	12	48	120
GMG18907	**GMG19907**	R1.0	**12.0**	12	48	120
GMG18908	**GMG19908**	R1.5	**12.0**	12	48	120
GMG18909	**GMG19909**	R2.0	**12.0**	12	48	120
GMG18910	**GMG19910**	R3.0	**12.0**	12	48	120
GMG18160	**GMG19160**	R1.0	**16.0**	16	64	140
GMG18911	**GMG19911**	R1.5	**16.0**	16	64	140
GMG18912	-	R2.0	**16.0**	16	64	140
GMG18913	**GMG19913**	R3.0	**16.0**	16	64	140
GMG18200	-	R1.0	**20.0**	20	80	150
GMG18914	**GMG19914**	R1.5	**20.0**	20	80	150
GMG18917	**GMG19917**	R4.0	**20.0**	20	80	150
GMG18918	**GMG19918**	R5.0	**20.0**	20	80	150

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P																			M			K						
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel										Stainless steel			Grey cast iron			Nodular cast iron			Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20										
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21										
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230										
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎										

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMG18** SERIES
FLAT SHANK **GMG19** SERIES

CARBIDE, 6 FLUTE CORNER RADIUS EXTRA LONG LENGTH

- VOLLHARTMETALL, 6 SCHNEIDEN ECKENRADIUS EXTRA LANG
- CARBURE, 6 DENTS, SÉRIE EXTRA-LONGUE, RAYONNÉE
- MD, 6 TAGLIENTI SERIE EXTRA LUNGA TORICA

▶The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40

▶Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochiodales Fräsen.
▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

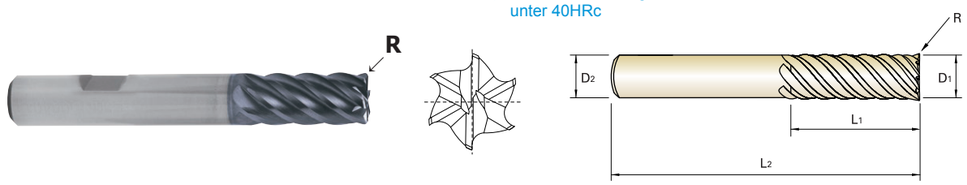

CARBIDE | 6 | 45° | PLAIN | FLAT | Y Coating | p.C484

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMG18250	-	R1.0	**25.0**	25	100	170
GMG18919	**GMG19919**	R1.5	**25.0**	25	100	170
GMG18922	**GMG19922**	R4.0	**25.0**	25	100	170
GMG18923	**GMG19923**	R5.0	**25.0**	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMH58** SERIES
FLAT SHANK **GMH59** SERIES

6 FLUTE CORNER RADIUS EXTRA LONG LENGTH CHIP SPLITTER

- VOLLHARTMETALL,6 SCHNEIDEN ECKRADIUS EXTRA LANG SPANTEILER
- CARBURE, 6 dents, extra-longue, fendeur des copeaux
- MD, 6 TAGLIENTI, TORICA, SERIE EXTRA LUNGA CON ROMPI TRUCIOLO

▶Special chip splitter design for better chip removal shortened chip length at high axial machining
▶High Performance for Steels, Stainless Steels and Cast Iron

▶ Spezielles Spanteilerdesign für verbesserte Spanabfuhr durch kurze Späne bei hohem axialen Eingriff
▶ Hohe Leistung bei der Bearbeiting von Stählen, rostfreien Stählen und Gusseisen.

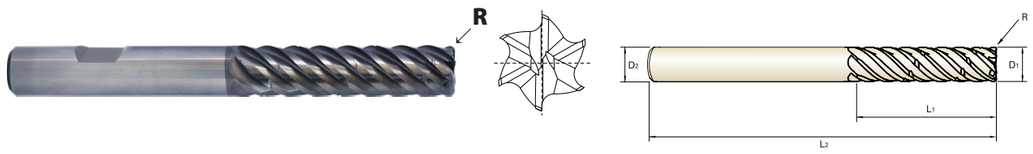

CARBIDE | 6 | 45° | PLAIN | FLAT | Y Coating | p.C485

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMH58060	**GMH59060**	R0.5	**6.0**	6	24	75
GMH58901	**GMH59901**	R1.0	**6.0**	6	24	75
GMH58080	**GMH59080**	R0.5	**8.0**	8	32	75
GMH58902	**GMH59902**	R1.0	**8.0**	8	32	75
GMH58903	**GMH59903**	R2.0	**8.0**	8	32	75
GMH58100	**GMH59100**	R0.5	**10.0**	10	40	100
GMH58904	**GMH59904**	R1.0	**10.0**	10	40	100
GMH58905	**GMH59905**	R1.5	**10.0**	10	40	100
GMH58906	**GMH59906**	R2.0	**10.0**	10	40	100
GMH58120	**GMH59120**	R0.5	**12.0**	12	48	120
GMH58907	**GMH59907**	R1.0	**12.0**	12	48	120
GMH58908	**GMH59908**	R1.5	**12.0**	12	48	120
GMH58909	**GMH59909**	R2.0	**12.0**	12	48	120
GMH58910	**GMH59910**	R3.0	**12.0**	12	48	120
GMH58160	**GMH59160**	R1.0	**16.0**	16	64	140
GMH58911	**GMH59911**	R1.5	**16.0**	16	64	140
GMH58912	**GMH59912**	R2.0	**16.0**	16	64	140
GMH58913	**GMH59913**	R3.0	**16.0**	16	64	140
GMH58200	**GMH59200**	R1.0	**20.0**	20	80	150
GMH58914	**GMH59914**	R1.5	**20.0**	20	80	150
GMH58915	**GMH59915**	R2.0	**20.0**	20	80	150
GMH58916	**GMH59916**	R3.0	**20.0**	20	80	150

▶ NEXT PAGE

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMH58** SERIES
FLAT SHANK **GMH59** SERIES

6 FLUTE CORNER RADIUS EXTRA LONG LENGTH CHIP SPLITTER

VOLLHARTMETALL,6 SCHNEIDEN ECKRADIUS EXTRA LANG SPANTEILER
CARBURE, 6 dents, extra-longue, fendeur des copeaux
MD, 6 TAGLIENTI, TORICA, SERIE EXTRA LUNGA CON ROMPI TRUCIOLO

- ▶Special chip splitter design for better chip removal shortened chip length at high axial machining
- ▶High Performance for Steels, Stainless Steels and Cast Iron
- ▶ Spezielles Spanteilerdesign für verbesserte Spanabfuhr durch kurze Späne bei hohem axialen Eingriff
- ▶ Hohe Leistung bei der Bearbeiting von Stählen, rostfreien Stählen und Gusseisen.

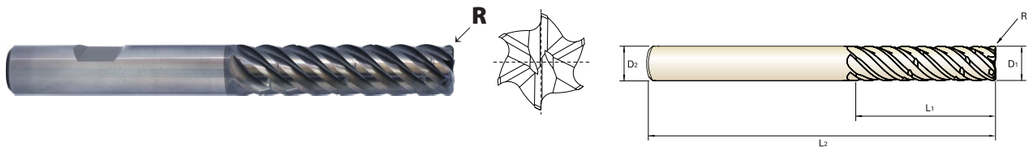

CARBIDE | 6 | 45° | PLAIN | FLAT | Y Coating | p.C485

Unit : mm

EDP No.		Corner Radius	Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	R	D1	D2	L1	L2
GMH58917	GMH59917	R4.0	20.0	20	80	150
GMH58918	GMH59918	R5.0	20.0	20	80	150
GMH58250	GMH59250	R1.0	25.0	25	100	170
GMH58919	GMH59919	R1.5	25.0	25	100	170
GMH58920	GMH59920	R2.0	25.0	25	100	170
GMH58921	GMH59921	R3.0	25.0	25	100	170
GMH58922	GMH59922	R4.0	25.0	25	100	170
GMH58923	GMH59923	R5.0	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMG12** SERIES **GMG14** SERIES
FLAT SHANK **GMG13** SERIES **GMG15** SERIES

CARBIDE, 6 FLUTE LONG/EXTRA LONG LENGTH

VOLLHARTMETALL, 6 SCHNEIDEN, LANG/EXTRA LANG
CARBURE, 6 DENTS, SÉRIE --LONGUE/EXTRA-LONGUE
MD, 6 TAGLIENTI SERIE LUNGA /EXTRA LUNGA

- ▶The unique geometry of the variable pitch provides the best chatter free tool for high speed and trochoidal milling
- ▶Excellent performance for Stainless Steels, Mild Steels, Cast Iron, Low/Medium hardness materials under HRc40
- ▶Durch die einzigartige Geometrie und die ungleiche Teilung der Schneiden, eignet sich Fräser Bestens für hohe Bearbeitungsgeschwindigkeiten und trochiodales Fräsen.
- ▶Exzellente Leistung in Edelstählen, Baustählen, Guss und Stählen unter 40HRc

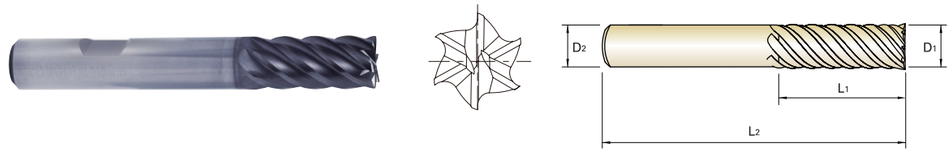

CARBIDE | 6 | 45° | PLAIN | FLAT | Y Coating | p.C484

- LONG (GMG12, GMG13)

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
GMG12060	GMG13060	6.0	6	13	57
GMG12080	GMG13080	8.0	8	19	63
GMG12100	GMG13100	10.0	10	22	72
GMG12120	GMG13120	12.0	12	26	83
GMG12160	GMG13160	16.0	16	32	92
GMG12200	GMG13200	20.0	20	38	104
GMG12250	GMG13250	25.0	25	44	104

Mill Dia. Tolerance (mm)		Shank Dia. Tolerance
Up to Ø12	0 ~ - 0.02	h5 * Shank Dia.≥Ø12 : h6
Over Ø12	0 ~ - 0.03	



- EXTRA LONG (GMG14, GMG15)

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
GMG14060	GMG15060	6.0	6	24	75
GMG14080	GMG15080	8.0	8	32	75
GMG14100	GMG15100	10.0	10	40	100
GMG14120	GMG15120	12.0	12	48	120
GMG14160	GMG15160	16.0	16	64	140
GMG14200	GMG15200	20.0	20	80	150
GMG14250	GMG15250	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6



◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel		Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 PLUS END MILLS

PLAIN SHANK **GMH56** SERIES
FLAT SHANK **GMH57** SERIES

CARBIDE, 6 FLUTE EXTRA LONG LENGTH CHIP SPLITTER

VOLLHARTMETALL, 6-SCHNEIDEN-SPANTEILER MIT EXTRA LANGER LÄNGE
Carbure, 6 Dents, Torique, Extra-Longue, Fendeur Des Copeaux
MD, 6 TAGLIENTI, SERIE EXTRA LUNGA CON ROMPI TRUCIOLO

- ▶Special chip splitter design for better chip removal shortened chip length at high axial machining
- ▶High Performance for Steels, Stainless Steels and Cast Iron

- ▶ Spezielles Spanteilerdesign für verbesserte Spanabfuhr durch kurze Späne bei hohem axialen Eingriff
- ▶ Hohe Leistung bei der Bearbeiting von Stählen, rostfreien Stählen und Gusseisen.

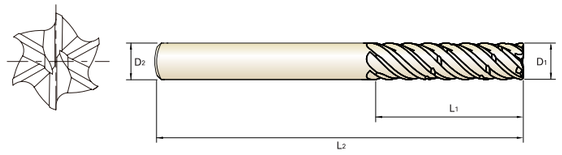

CARBIDE | 6 | 45° | PLAIN | FLAT | Y Coating | p.C485

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length
PLAIN	FLAT	D1	D2	L1	L2
GMH56060	-	6.0	6	24	75
GMH56080	GMH57080	8.0	8	32	75
GMH56100	GMH57100	10.0	10	40	100
-	GMH57120	12.0	12	48	120
GMH56160	GMH57160	16.0	16	64	140
-	GMH57200	20.0	20	80	150
GMH56250	GMH57250	25.0	25	100	170

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎	◎

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	○	○				

V7 INOX END MILLS

PLAIN SHANK **EMB72** SERIES
FLAT SHANK **EMB73** SERIES

CARBIDE, 5 FLUTE LONG LENGTH

VOLLHARTMETALL, 5 SCHNEIDEN LANG
Fraise carbure, 5 dents, longue
5 TAGLIENTI, SERIE LUNGA, EVOLVENTE VARIABILE

- ▶Special flute geometry eliminates vibrations
- ▶Designed for mild steels, stainless steels, cast iron, tool steels, titanium alloys, prehardened steels and low hardness materials under HRc40
- ▶Excellent finished work piece
- ▶Higher speeds, deeper cuts and excellent metal removal rates

- ▶ Spezielle Schneidengeometrie verhindert Vibrationen
- ▶ Geeignet für Baustähle, Rostfreie Stähle, Grauguss, Werkzeugstähle, Titanlegierungen, hochfeste Stähle und Werkstoffe unter 40 HRc
- ▶ Bessere Werkstückoberflächen.
- ▶ Höhere Schnittgeschwindigkeiten, größere Profiltiefe und größeres Zerspanungsvolumen



CARBIDE | 5 | Sinusoidal | PLAIN | FLAT | C x 45° | AlTiN | p.C486

Unit : mm

EDP No.		Mill Diameter	Shank Diameter	Length of Cut	Overall Length	Chamfer
PLAIN	FLAT					
EMB72060	EMB73060	6.0	6	13	57	0.1
EMB72080	EMB73080	8.0	8	19	63	0.1
EMB72100	EMB73100	10.0	10	22	72	0.1
EMB72120	-	12.0	12	26	83	0.1
EMB72140	EMB73140	14.0	14	26	83	0.2
EMB72160	EMB73160	16.0	16	32	92	0.2
EMB72180	EMB73180	18.0	18	32	92	0.2
EMB72200	-	20.0	20	38	104	0.2
EMB72250	EMB73250	25.0	25	38	104	0.2

Mill Dia. Tolerance (mm)	Shank Dia. Tolerance
0 ~ - 0.03	h5 * Shank Dia.≥Ø12 : h6



Enforced Cutting Edge

◎ : Excellent ○ : Good

ISO	P											M			K					
Material Description	Non-alloy steel					Low alloy steel				High alloyed steel, and tool steel		Stainless steel			Grey cast iron		Nodular cast iron		Malleable cast iron	
VDI 3323	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20
HRc		13	25	28	32	10	29	32	38	15	35	15	23	10	10	26	3	25		21
HB	125	190	250	270	300	180	275	300	350	200	325	200	240	180	180	260	160	250	130	230
Recommend	◎	◎	○	○	○	◎	○	○	○	◎	○	◎	◎	◎	○	○	○	○	○	○

ISO	N										S							H		
Material Description	Aluminum-wrought alloy		Aluminum-cast, alloyed			Copper and Copper Alloys (Bronze / Brass)			Non Metallic Materials		Heat Resistant Super Alloys					Titanium Alloys		Hardened steel	Chilled Cast Iron	Hardened Cast Iron
VDI 3323	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41
HRc											15	30	25	38	34			55	60	42	55
HB	60	100	75	90	130	110	90	100			200	280	250	350	320	400 Rm	1050 Rm	550	630	400	550
Recommend											○	○	○	○	○	◎	◎				

V7 PLUS END MILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GMG55, GMG56 SERIES — 4 FLUTE BALL NOSE

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø) 3.0	4.0	5.0	6.0	8.0	10.0	12.0	16.0	18.0	20.0	25.0
P	1-4	Non-alloy steel	0.5D	1.0D	Vc	162	162	162	162	162	162	162	162	162	162	162
					fz	0.025	0.027	0.03	0.04	0.06	0.065	0.07	0.075	0.08	0.09	0.099
					RPM	17189	12892	10313	8594	6446	5157	4297	3223	2865	2578	2063
					FEED	1719	1392	1238	1375	1547	1341	1203	967	917	928	817
	5	Low alloy steel	0.5D	1.0D	Vc	113	113	113	113	113	113	113	113	113	113	113
					fz	0.025	0.027	0.03	0.04	0.06	0.065	0.07	0.074	0.079	0.09	0.099
					RPM	11990	8992	7194	5995	4496	3597	2997	2248	1998	1798	1439
					FEED	1199	971	863	959	1079	935	839	665	631	647	570
	6-7		0.5D	1.0D	Vc	162	162	162	162	162	162	162	162	162	162	162
					fz	0.025	0.027	0.03	0.04	0.06	0.065	0.07	0.075	0.08	0.09	0.099
					RPM	17189	12892	10313	8594	6446	5157	4297	3223	2865	2578	2063
					FEED	1719	1392	1238	1375	1547	1341	1203	967	917	928	817
	8-9		0.5D	1.0D	Vc	113	113	113	113	113	113	113	113	113	113	113
					fz	0.025	0.027	0.03	0.04	0.06	0.065	0.07	0.074	0.079	0.09	0.099
					RPM	11990	8992	7194	5995	4496	3597	2997	2248	1998	1798	1439
					FEED	1199	971	863	959	1079	935	839	665	631	647	570
	10-11.1	High alloyed steel, and tool steel	0.5D	1.0D	Vc	68	68	68	68	68	68	68	68	68	68	68
					fz	0.017	0.019	0.021	0.028	0.042	0.045	0.049	0.052	0.056	0.063	0.07
					RPM	7215	5411	4329	3608	2706	2165	1804	1353	1203	1082	866
					FEED	491	411	364	404	455	390	354	281	269	273	242
M	12-13	Stainless steel	0.5D	1.0D	Vc	77	77	77	77	77	77	77	77	77	77	77
					fz	0.015	0.015	0.025	0.03	0.04	0.045	0.05	0.054	0.059	0.058	0.059
					RPM	8170	6127	4902	4085	3064	2451	2042	1532	1362	1225	980
					FEED	490	368	490	490	490	441	408	331	321	284	231
	14.2		0.5D	1.0D	Vc	85	85	85	85	85	85	85	85	85	85	85
					fz	0.02	0.02	0.025	0.041	0.045	0.05	0.055	0.06	0.064	0.065	0.068
					RPM	9019	6764	5411	4509	3382	2706	2255	1691	1503	1353	1082
					FEED	722	541	541	740	609	541	496	406	385	352	294
K	15-20	Grey cast iron	0.5D	1.0D	Vc	77	77	77	77	77	77	77	77	77	77	77
					fz	0.02	0.02	0.025	0.041	0.045	0.05	0.055	0.06	0.064	0.065	0.068
					RPM	8170	6127	4902	4085	3064	2451	2042	1532	1362	1225	980
					FEED	654	490	490	670	551	490	449	368	349	319	267
S	31-35	Heat Resistant Super Alloys	0.2D	0.3D	Vc	119	119	119	119	119	119	119	119	119	119	119
					fz	0.031	0.033	0.037	0.05	0.074	0.081	0.087	0.093	0.099	0.112	0.124
					RPM	12626	9470	7576	6313	4735	3788	3157	2367	2104	1894	1515
					FEED	1566	1250	1121	1263	1402	1227	1098	881	833	848	752
	36-37	Titanium Alloys	0.5D	0.3D	Vc	21	21	21	21	21	21	21	21	21	21	21
					fz	0.014	0.014	0.017	0.028	0.031	0.035	0.038	0.042	0.045	0.045	0.048
					RPM	2228	1671	1337	1114	836	668	557	418	371	334	267
					FEED	125	94	91	125	104	94	85	70	67	60	51
			0.5D	1.0D	Vc	47	47	47	47	47	47	47	47	47	47	47
					fz	0.018	0.018	0.022	0.037	0.04	0.045	0.049	0.054	0.058	0.058	0.061
					RPM	4987	3740	2992	2493	1870	1496	1247	935	831	748	598
					FEED	359	269	263	369	299	269	244	202	193	174	146



V7 PLUS END MILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GMF52 GMF53 GMF54 GMF55 GMF56 GMF57 GMF58 GMF59 GMF60 GMF61 GMF62 GMF63 — 4 FLUTE - SIDE & SLOTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae Side	Ae Slotting	Ap Side	Ap Slotting	Parameter	Diameter (Ø) 3.0	4.0	5.0	6.0	8.0	10.0	12.0	14.0	16.0	18.0	20.0	25.0
P	1-4	Non-alloy steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	152	152	152	152	152	168	168	168	168	168	168	168
							fz	0.005	0.008	0.011	0.016	0.027	0.038	0.047	0.049	0.053	0.059	0.065	0.064
							RPM	16128	12096	9677	8064	6048	5348	4456	3820	3342	2971	2674	2139
							FEED	323	387	426	516	653	813	838	749	709	701	695	548
	5	Low alloy steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	107	107	107	107	107	117	117	117	117	117	117	117
							fz	0.005	0.008	0.011	0.016	0.027	0.038	0.047	0.049	0.053	0.059	0.065	0.064
							RPM	11353	8515	6812	5677	4257	3724	3104	2660	2328	2069	1862	1490
							FEED	227	272	300	363	460	566	583	521	493	488	484	381
	6-7		0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	152	152	152	152	152	168	168	168	168	168	168	168
							fz	0.005	0.008	0.011	0.016	0.027	0.038	0.047	0.049	0.053	0.059	0.065	0.064
							RPM	16128	12096	9677	8064	6048	5348	4456	3820	3342	2971	2674	2139
							FEED	323	387	426	516	653	813	838	749	709	701	695	548
	8-9		0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	107	107	107	107	107	117	117	117	117	117	117	117
							fz	0.005	0.008	0.011	0.016	0.027	0.038	0.047	0.049	0.053	0.059	0.065	0.064
							RPM	11353	8515	6812	5677	4257	3724	3104	2660	2328	2069	1862	1490
							FEED	227	272	300	363	460	566	583	521	493	488	484	381
	10-11.1	High alloyed steel, and tool steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	64	64	64	64	64	70	70	70	70	70	70	70
							fz	0.003	0.006	0.008	0.011	0.019	0.027	0.032	0.034	0.037	0.041	0.045	0.045
							RPM	6791	5093	4074	3395	2546	2228	1857	1592	1393	1238	1114	891
							FEED	81	122	130	149	194	241	238	216	206	203	201	160
M	12-13	Stainless steel	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	148	148	148	148	148	148	148	148	148	148	148	148
							fz	0.004	0.006	0.009	0.013	0.022	0.034	0.039	0.042	0.045	0.05	0.055	0.055
							RPM	15703	11777	9422	7852	5889	4711	3926	3365	2944	2617	2355	1884
							FEED	251	283	339	408	518	641	612	565	530	523	518	415
	14.2		0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	95	95	95	95	95	95	95	95	95	95	95	95
							fz	0.005	0.008	0.013	0.018	0.028	0.048	0.055	0.059	0.062	0.069	0.076	0.076
							RPM	10080	7560	6048	5040	3780	3024	2520	2160	1890	1680	1512	1210
							FEED	202	242	314	363	423	581	554	510	469	464	460	368
K	15-20	Grey cast iron	0.5D	1.0D	1.5D (1.2D)	1.0D (0.8D)	Vc	112	112	112	112	112	123	123	123	123	123	123	123
							fz	0.006	0.01	0.014	0.02	0.034	0.048	0.058	0.061	0.065	0.073	0.081	0.079
							RPM	11884	8913	7130	5942	4456	3915	3263	2797	2447	2175	1958	1566
							FEED	285	357	399	475	606	752	757	682	636	635	634	495
S	31-35	Heat Resistant Super Alloys	0.25D	1.0D	1.0D	0.5D	Vc	26	26	26	26	26	26	26	26	26	26	26	26
							fz	0.005	0.007	0.008	0.012	0.019	0.033	0.038	0.04	0.043	0.048	0.054	0.052
							RPM	2759	2069	1655	1379	1035	828	690	591	517	460	414	331
							FEED	55	58	53	66	79	109	105	95	89	88	89	69
	36-37	Titanium Alloys	0.4D	1.0D	1.0D	0.5D	Vc	58	58	58	58	58	58	58	58	58	58	58	58
							fz	0.004	0.007	0.011	0.016	0.025	0.042	0.05	0.053	0.055	0.062	0.068	0.069
							RPM	6154	4615	3692	3077	2308	1846	1538	1319	1154	1026	923	738
							FEED	98	129	162	197	231	310	308	280	254	254	251	204

*( ) : Short length & Neck type

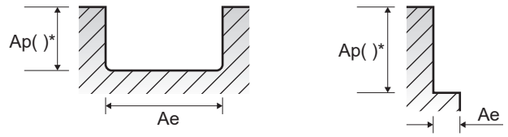

V7 PLUS END MILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GMG16 GMG17 | GMG18 GMG19 | GMG12 GMG13 | GMG14 GMG15 — **6 FLUTE - SIDE CUTTING**

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø) 6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	2.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	5	Low alloy steel	0.05D	2.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	6-7		0.05D	2.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	8-9		0.05D	2.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	10-11.1	High alloyed steel, and tool steel	0.05D	2.0D	Vc	100	100	100	100	100	100	100
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.144
					RPM	5305	3979	3183	2653	1989	1592	1273
					FEED	1305	1695	1681	1671	1468	1308	1100
M	12-13	Stainless steel	0.05D	2.0D	Vc	215	215	215	215	215	215	215
					fz	0.049	0.084	0.104	0.125	0.146	0.162	0.168
					RPM	11406	8555	6844	5703	4277	3422	2737
					FEED	3353	4312	4270	4277	3747	3326	2759
	14.1		0.05D	2.0D	Vc	145	145	145	145	145	145	145
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.143
					RPM	7692	5769	4615	3846	2885	2308	1846
					FEED	1892	2458	2437	2423	2129	1897	1584
	14.2		0.05D	2.0D	Vc	135	135	135	135	135	135	135
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.142
					RPM	7162	5371	4297	3581	2686	2149	1719
					FEED	1762	2288	2269	2256	1982	1766	1464
K	15-20	Grey cast iron	0.05D	2.0D	Vc	225	225	225	225	225	225	225
					fz	0.082	0.139	0.173	0.208	0.242	0.270	0.278
					RPM	11937	8952	7162	5968	4476	3581	2865
					FEED	5844	7477	7426	7434	6510	5801	4785
S	31-35	Heat Resistant Super Alloys	0.05D	2.0D	Vc	35	35	35	35	35	35	35
					fz	0.033	0.055	0.070	0.082	0.097	0.112	0.115
					RPM	1857	1393	1114	928	696	557	446
					FEED	368	460	468	457	405	374	307
	36-37	Titanium Alloys	0.05D	2.0D	Vc	115	115	115	115	115	115	115
					fz	0.033	0.055	0.070	0.083	0.097	0.113	0.117
					RPM	6101	4576	3661	3050	2288	1830	1464
					FEED	1208	1510	1537	1519	1332	1241	1028



(*) : If product's Length of Cut(L.O.C) is below 2D, it must be applied with L.O.C x 90%

V7 PLUS END MILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

GMH58 GMH59 | GMH56 GMH57 — **6 FLUTE CHIP SPLITTER - SIDE CUTTING**

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø) 6.0	8.0	10.0	12.0	16.0	20.0	25.0
P	1-4	Non-alloy steel	0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	5	Low alloy steel	0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	6-7		0.05D	3.0D	Vc	300	300	300	300	300	300	300
					fz	0.068	0.116	0.144	0.173	0.202	0.225	0.232
					RPM	15915	11937	9549	7958	5968	4775	3820
					FEED	6494	8308	8251	8260	7234	6446	5317
	8-9		0.05D	3.0D	Vc	205	205	205	205	205	205	205
					fz	0.050	0.085	0.106	0.128	0.149	0.167	0.174
					RPM	10876	8157	6525	5438	4078	3263	2610
					FEED	3263	4160	4150	4176	3646	3269	2725
	10-11.1	High alloyed steel, and tool steel	0.05D	3.0D	Vc	100	100	100	100	100	100	100
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.144
					RPM	5305	3979	3183	2653	1989	1592	1273
					FEED	1305	1695	1681	1671	1468	1308	1100
M	12-13	Stainless steel	0.05D	3.0D	Vc	215	215	215	215	215	215	215
					fz	0.049	0.084	0.104	0.125	0.146	0.162	0.168
					RPM	11406	8555	6844	5703	4277	3422	2737
					FEED	3353	4312	4270	4277	3747	3326	2759
	14.1		0.05D	3.0D	Vc	145	145	145	145	145	145	145
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.143
					RPM	7692	5769	4615	3846	2885	2308	1846
					FEED	1892	2458	2437	2423	2129	1897	1584
	14.2		0.05D	3.0D	Vc	135	135	135	135	135	135	135
					fz	0.041	0.071	0.088	0.105	0.123	0.137	0.142
					RPM	7162	5371	4297	3581	2686	2149	1719
					FEED	1762	2288	2269	2256	1982	1766	1464
K	15-20	Grey cast iron	0.05D	3.0D	Vc	225	225	225	225	225	225	225
					fz	0.082	0.139	0.173	0.208	0.242	0.270	0.278
					RPM	11937	8952	7162	5968	4476	3581	2865
					FEED	5844	7477	7426	7434	6510	5801	4785
S	31-35	Heat Resistant Super Alloys	0.05D	3.0D	Vc	35	35	35	35	35	35	35
					fz	0.033	0.055	0.070	0.082	0.097	0.112	0.115
					RPM	1857	1393	1114	928	696	557	446
					FEED	368	460	468	457	405	374	307
	36-37	Titanium Alloys	0.05D	3.0D	Vc	115	115	115	115	115	115	115
					fz	0.033	0.055	0.070	0.083	0.097	0.113	0.117
					RPM	6101	4576	3661	3050	2288	1830	1464
					FEED	1208	1510	1537	1519	1332	1241	1028



(*) : If product's Length of Cut(L.O.C) is below 2D, it must be applied with L.O.C x 90%

V7 INOX END MILLS

RECOMMENDED CUTTING CONDITIONS
EMPFOHLENE SCHNEIDPARAMETER

EMB72, EMB73 SERIES — 5 FLUTE - SIDE CUTTING

Vc = m/min.
fz = mm/tooth
RPM = rev./min.
FEED = mm/min.

ISO	VDI 3323	Material Description	Ae	Ap	Parameter	Diameter (Ø) 6.0	8.0	10.0	12.0	14.0	16.0	20.0
P	1-2	Non-alloy steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
	6		0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
	10	High alloyed steel, and tool steel	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
M	12-13	Stainless steel	0.25D	1.25D	Vc	105	105	105	145	105	105	105
					fz	0.030	0.032	0.038	0.043	0.064	0.068	0.076
					RPM	5570	4178	3342	3846	2387	2089	1671
					FEED	836	668	635	827	764	710	635
	14.1		0.25D	1.25D	Vc	115	115	115	115	115	115	115
					fz	0.030	0.032	0.038	0.063	0.065	0.069	0.076
					RPM	6101	4576	3661	3050	2615	2288	1830
					FEED	915	732	696	961	850	789	696
K	15-20	Grey cast iron	0.25D	1.25D	Vc	135	135	135	135	135	135	135
					fz	0.034	0.038	0.050	0.063	0.069	0.076	0.089
					RPM	7162	5371	4297	3581	3069	2686	2149
					FEED	1218	1021	1074	1128	1059	1021	956
S	31-35	Heat Resistant Super Alloys	0.25D	1.0D	Vc	25	25	25	25	25	25	25
					fz	0.017	0.020	0.025	0.036	0.045	0.048	0.060
					RPM	1326	995	796	663	568	497	398
					FEED	113	99	99	119	128	119	119
	36-37	Titanium Alloys	0.25D	1.25D	Vc	85	85	85	85	85	85	85
					fz	0.030	0.031	0.038	0.050	0.057	0.063	0.075
					RPM	4509	3382	2706	2255	1933	1691	1353
					FEED	676	524	514	564	551	533	507